



US010507117B2

(12) **United States Patent**
McDonough et al.

(10) **Patent No.:** **US 10,507,117 B2**

(45) **Date of Patent:** ***Dec. 17, 2019**

(54) **INTERVERTEBRAL IMPLANTS, SYSTEMS, AND METHODS OF USE**

(71) Applicant: **DePuy Synthes Products, Inc.**,
Raynham, MA (US)

(72) Inventors: **William P. McDonough**, Collegeville, PA (US); **William L. Strausbaugh**, Myerstown, PA (US); **Benjamin Chronister**, Parkesburg, PA (US); **Thomas Pepe**, West Chester, PA (US); **Michael Coover**, Downingtown, PA (US); **Katharine Coffman**, Louisville, CO (US); **Thomas Kueenzi**, Magden (CH); **Edwin Chan**, Woodbridge, NJ (US); **Peyman Pakzaban**, Pasadena, TX (US); **Kurt Schmura**, Middletown, MA (US)

(73) Assignee: **DePuy Synthes Products, Inc.**,
Raynham, MA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/827,533**

(22) Filed: **Nov. 30, 2017**

(65) **Prior Publication Data**

US 2018/0078387 A1 Mar. 22, 2018

Related U.S. Application Data

(63) Continuation of application No. 14/954,412, filed on Nov. 30, 2015, now Pat. No. 9,848,992, which is a
(Continued)

(51) **Int. Cl.**

A61F 2/44 (2006.01)

A61B 17/17 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **A61F 2/4465** (2013.01); **A61B 17/1757**
(2013.01); **A61F 2/4455** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC A61F 2002/443; A61F 2220/0025; A61F
2002/2835; A61F 2002/30604;

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

424,836 A 4/1890 Thompson

438,892 A 10/1890 Lippy

(Continued)

FOREIGN PATENT DOCUMENTS

AU 2004232317 A1 11/2004

CA 2111598 A1 6/1994

(Continued)

OTHER PUBLICATIONS

Cloward, Gas-Sterilized Cadaver Bone Grafts for spinal Fusion
Operation , 5(1) Spine 4-10 Jan./Feb. 1980.

(Continued)

Primary Examiner — Eduardo C Robert


Assistant Examiner — Tara Rose E Carter

(74) *Attorney, Agent, or Firm* — BakerHostetler

(57) **ABSTRACT**

An intervertebral implant frame that is configured to be attached to a spacer body can include a pair of arms that extend longitudinally from a support member such that the arms extend substantially around the spacer body. The arms may be configured to expand, crimp, or otherwise engage the spacer body to thereby hold the spacer body to the frame. The spacer body may be made from bone graft.

20 Claims, 25 Drawing Sheets

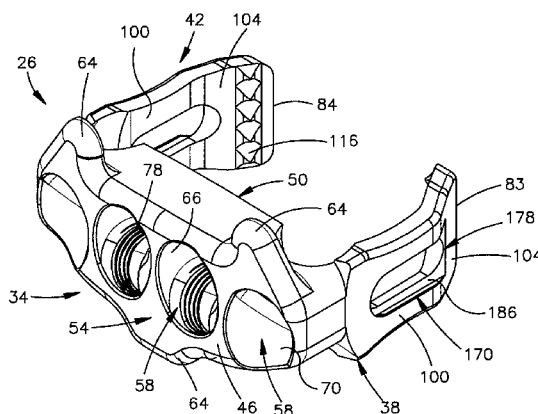

Related U.S. Application Data

- continuation of application No. 13/333,065, filed on Dec. 21, 2011, now Pat. No. 9,220,604.
- (60) Provisional application No. 61/425,509, filed on Dec. 21, 2010, provisional application No. 61/425,505, filed on Dec. 21, 2010.
- (51) **Int. Cl.**
A61F 2/46 (2006.01)
A61B 17/86 (2006.01)
A61F 2/28 (2006.01)
A61F 2/30 (2006.01)
- (52) **U.S. Cl.**
 CPC *A61F 2/4611* (2013.01); *A61B 17/86* (2013.01); *A61F 2/28* (2013.01); *A61F 2/3094* (2013.01); *A61F 2002/2835* (2013.01); *A61F 2002/305* (2013.01); *A61F 2002/30131* (2013.01); *A61F 2002/30387* (2013.01); *A61F 2002/30477* (2013.01); *A61F 2002/30571* (2013.01); *A61F 2002/30576* (2013.01); *A61F 2002/30604* (2013.01); *A61F 2002/30774* (2013.01); *A61F 2002/30787* (2013.01); *A61F 2002/4622* (2013.01); *A61F 2310/00023* (2013.01); *A61F 2310/00131* (2013.01); *A61F 2310/00293* (2013.01); *A61F 2310/00299* (2013.01); *A61F 2310/00359* (2013.01)
- (58) **Field of Classification Search**
 CPC *A61F 2/4455*; *A61F 2/442*; *A61F 2002/30387*; *A61F 2/4465*; *A61B 17/1757*
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,105,105	A	7/1914	Sherman	4,501,269	A	2/1985	Bagby
1,200,797	A	10/1916	Barbe	4,503,848	A	3/1985	Caspar et al.
2,151,919	A	3/1939	Jacobson	4,512,038	A	4/1985	Alexander et al.
2,372,888	A	4/1945	Duggan	4,545,374	A	10/1985	Jacobson
2,621,145	A	12/1952	Sano	4,553,890	A	11/1985	Gulistan
2,782,827	A	2/1957	Rosan	4,599,086	A	7/1986	Doty
2,906,311	A	9/1959	Boyd	4,627,853	A	12/1986	Campbell et al.
2,972,367	A	2/1961	Wootton	4,640,524	A	2/1987	Sedlmair
3,062,253	A	11/1962	Milheiser	4,648,768	A	3/1987	Hambrie
3,272,249	A	9/1966	Houston	4,678,470	A	7/1987	Nashef et al.
3,350,103	A	10/1967	Ahlstone	4,708,377	A	11/1987	Hunting
3,426,364	A	2/1969	Lumb	4,711,760	A	12/1987	Blaushild
3,561,075	A	2/1971	Selinko	4,714,469	A	12/1987	Kenna
3,579,831	A	5/1971	Stevens et al.	4,717,115	A	1/1988	Schmitz et al.
3,707,303	A	12/1972	Petri	4,743,256	A	5/1988	Brantigan
3,810,703	A	5/1974	Pasbrig	4,781,721	A	11/1988	Grunde
3,867,728	A	2/1975	Stubstad et al.	4,793,335	A	12/1988	Frey et al.
3,899,897	A	8/1975	Boerger et al.	4,804,290	A	2/1989	Balsells
3,945,671	A	3/1976	Gerlach	4,812,094	A	3/1989	Grube
4,017,946	A	4/1977	Soja	4,829,152	A	5/1989	Rostoker et al.
4,056,301	A	11/1977	Norden	4,834,757	A	5/1989	Brantigan
4,123,132	A	10/1978	Hardy et al.	4,858,603	A	8/1989	Clemow et al.
4,135,506	A	1/1979	Ulrich	4,872,452	A	10/1989	Alexson
4,278,120	A	7/1981	Hart et al.	4,878,915	A	11/1989	Brantigan
4,280,875	A	7/1981	Werres	4,904,261	A	2/1990	Dove et al.
4,285,377	A	8/1981	Hart	4,917,704	A	4/1990	Frey et al.
4,288,902	A	9/1981	Franz	4,932,973	A	6/1990	Gendler
4,297,063	A	10/1981	Hart	4,936,851	A	6/1990	Fox et al.
4,298,993	A	11/1981	Kovaleva et al.	4,946,378	A	8/1990	Hirayama et al.
4,299,902	A	11/1981	Soma et al.	4,950,296	A	8/1990	McIntyre
4,349,921	A	9/1982	Kuntz	4,955,908	A	9/1990	Frey et al.
4,388,921	A	6/1983	Sutter et al.	4,961,740	A	10/1990	Ray et al.
4,394,370	A	7/1983	Jefferies	4,976,576	A	12/1990	Mahaney et al.
4,450,591	A	5/1984	Rappaport	4,978,350	A	12/1990	Wagenknecht
4,484,570	A	11/1984	Sutter et al.	4,994,084	A	2/1991	Brennan
4,488,543	A	12/1984	Tornier	4,997,432	A	3/1991	Keller
				5,006,120	A	4/1991	Carter
				5,010,783	A	4/1991	Sparks et al.
				5,017,069	A	5/1991	Stencel
				5,020,949	A	6/1991	Davidson et al.
				5,026,373	A	6/1991	Ray et al.
				5,030,220	A	7/1991	Howland
				5,047,058	A	9/1991	Roberts et al.
				5,053,049	A	10/1991	Campbell
				5,062,850	A	11/1991	MacMillan et al.
				5,071,437	A	12/1991	Steffee
				5,084,051	A	1/1992	Toermela et al.
				5,085,660	A	2/1992	Lin
				5,096,150	A	3/1992	Westwood
				5,108,438	A	4/1992	Stone
				5,112,354	A	5/1992	Sires
				5,116,374	A	5/1992	Stone
				5,118,235	A	6/1992	Dill
				5,139,424	A	8/1992	Yli-Urpo
				5,147,404	A	9/1992	Downey
				5,163,949	A	11/1992	Bonutti
				5,163,960	A	11/1992	Bonutti
				5,180,381	A	1/1993	Aust et al.
				5,192,327	A	3/1993	Brantigan
				5,197,971	A	3/1993	Bonutti
				5,201,736	A	4/1993	Strauss
				5,207,543	A	5/1993	Kirma
				5,211,664	A	5/1993	Tepic et al.
				5,235,034	A	8/1993	Bobsein et al.
				5,238,342	A	8/1993	Stencel
				5,258,031	A	11/1993	Salib et al.
				5,269,785	A	12/1993	Bonutti
				5,275,601	A	1/1994	Gogolewski et al.
				5,281,226	A	1/1994	Davydov et al.
				5,282,861	A	2/1994	Kaplan
				5,284,655	A	2/1994	Bogdansky et al.
				5,290,312	A	3/1994	Kojimoto et al.
				5,295,994	A	3/1994	Bonutti
				5,298,254	A	3/1994	Prewett et al.
				5,304,021	A	4/1994	Oliver et al.
				5,306,307	A	4/1994	Senter et al.
				5,306,308	A	4/1994	Gross et al.
				5,306,309	A	4/1994	Wagner et al.
				5,314,476	A	5/1994	Prewett et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,314,477	A	5/1994	Marnay	5,642,960	A	7/1997	Salice
5,329,846	A	7/1994	Bonutti	5,645,596	A	7/1997	Kim et al.
5,330,535	A	7/1994	Moser et al.	5,645,606	A	7/1997	Oehy et al.
5,331,975	A	7/1994	Bonutti	5,653,708	A	8/1997	Howland
5,345,927	A	9/1994	Bonutti	5,662,710	A	9/1997	Bonutti
5,348,788	A	9/1994	White	5,667,520	A	9/1997	Bonutti
5,368,593	A	11/1994	Stark	5,669,909	A	9/1997	Zdeblick et al.
5,380,323	A	1/1995	Howland	5,674,296	A	10/1997	Bryan et al.
5,385,583	A	1/1995	Cotrel	5,676,666	A	10/1997	Oxland et al.
5,397,364	A	3/1995	Kozak et al.	5,676,699	A	10/1997	Gogolewski et al.
5,403,317	A	4/1995	Bonutti	5,681,311	A	10/1997	Foley et al.
5,403,348	A	4/1995	Bonutti	5,683,216	A	11/1997	Erbes
5,405,391	A	4/1995	Henderson et al.	5,683,394	A	11/1997	Rinner
5,411,348	A	5/1995	Balsells	5,683,463	A	11/1997	Godefroy et al.
5,423,817	A	6/1995	Lin	5,685,826	A	11/1997	Bonutti
5,425,772	A	6/1995	Brantigan	5,694,951	A	12/1997	Bonutti
5,431,658	A	7/1995	Moskovich	5,702,449	A	12/1997	McKay
5,439,684	A	8/1995	Prewett et al.	5,702,451	A	12/1997	Biedermann et al.
5,441,538	A	8/1995	Bonutti	5,702,453	A	12/1997	Rabbe et al.
5,443,514	A	8/1995	Steffee	5,702,455	A	12/1997	Saggar
5,443,515	A	8/1995	Cohen et al.	5,707,390	A	1/1998	Bonutti
5,454,365	A	10/1995	Bonutti	5,713,899	A	2/1998	Marnay et al.
5,458,638	A	10/1995	Kulich et al.	5,713,900	A	2/1998	Benzel et al.
5,458,641	A	10/1995	Ramirez Jimenez	5,716,325	A	2/1998	Bonutti
5,458,643	A	10/1995	Oka et al.	5,725,531	A	3/1998	Shapiro
5,464,426	A	11/1995	Bonutti	5,725,588	A	3/1998	Errico et al.
5,478,342	A	12/1995	Kohrs	5,728,159	A	3/1998	Stroeve et al.
5,484,437	A	1/1996	Michelson	5,733,306	A	3/1998	Bonutti
5,487,744	A	1/1996	Howland	5,735,853	A	4/1998	Olerud
5,489,308	A	2/1996	Kulich et al.	5,735,875	A	4/1998	Bonutti et al.
5,496,348	A	3/1996	Bonutti	5,735,905	A	4/1998	Parr
5,507,818	A	4/1996	McLaughlin	5,755,796	A	5/1998	Ibo et al.
5,514,153	A	5/1996	Bonutti	5,755,798	A	5/1998	Papavero et al.
5,514,180	A	5/1996	Heggeness et al.	5,766,251	A	6/1998	Koshino
5,520,690	A	5/1996	Errico et al.	5,766,252	A	6/1998	Henry et al.
5,522,846	A	6/1996	Bonutti	5,766,253	A	6/1998	Brosnahan, III
5,522,899	A	6/1996	Michelson	5,772,661	A	6/1998	Michelson
5,527,343	A	6/1996	Bonutti	5,776,194	A	7/1998	Mikol et al.
5,531,746	A	7/1996	Errico et al.	5,776,196	A	7/1998	Matsuzaki et al.
5,534,012	A	7/1996	Bonutti	5,776,197	A	7/1998	Rabbe et al.
5,534,030	A	7/1996	Navarro et al.	5,776,198	A	7/1998	Rabbe et al.
5,534,031	A	7/1996	Matsuzaki et al.	5,776,199	A	7/1998	Michelson
5,534,032	A	7/1996	Hodorek	5,778,804	A	7/1998	Read
5,545,222	A	8/1996	Bonutti	5,782,915	A	7/1998	Stone
5,545,842	A	8/1996	Balsells	5,782,919	A	7/1998	Zdeblick et al.
5,549,612	A	8/1996	Yapp et al.	5,785,710	A	7/1998	Michelson
5,549,630	A	8/1996	Bonutti	5,800,433	A	9/1998	Benzel et al.
5,549,631	A	8/1996	Bonutti	5,827,318	A	10/1998	Bonutti
5,549,679	A	8/1996	Kulich	5,836,948	A	11/1998	Zucherman et al.
5,550,172	A	8/1996	Regula et al.	5,845,645	A	12/1998	Bonutti
5,554,191	A	9/1996	Lahille et al.	5,860,973	A	1/1999	Michelson
5,556,430	A	9/1996	Gendler	5,860,997	A	1/1999	Bonutti
5,556,431	A	9/1996	Buettner-Janz	5,861,041	A	1/1999	Tienboon
5,569,305	A	10/1996	Bonutti	5,865,845	A	2/1999	Thalgott
5,569,308	A	10/1996	Sottosanti	5,865,849	A	2/1999	Stone
5,570,983	A	11/1996	Hollander	5,872,915	A	2/1999	Dykes et al.
5,571,109	A	11/1996	Bertagnoli	5,876,402	A	3/1999	Errico et al.
5,571,190	A	11/1996	Ulrich et al.	5,876,452	A	3/1999	Athanasiou et al.
5,571,192	A	11/1996	Schoenhoeffer	5,879,389	A	3/1999	Koshino
5,577,517	A	11/1996	Bonutti	5,885,299	A	3/1999	Winslow et al.
5,578,034	A	11/1996	Estes	5,888,196	A	3/1999	Bonutti
5,584,862	A	12/1996	Bonutti	5,888,219	A	3/1999	Bonutti
5,593,409	A	1/1997	Michelson	5,888,222	A	3/1999	Coates et al.
5,593,425	A	1/1997	Bonutti et al.	5,888,223	A	3/1999	Bray, Jr.
5,597,278	A	1/1997	Peterkort	5,888,224	A	3/1999	Beckers et al.
5,601,553	A	2/1997	Trebing et al.	5,888,227	A	3/1999	Cottle
5,601,554	A	2/1997	Howland et al.	5,895,426	A	4/1999	Scarborough et al.
5,607,428	A	3/1997	Lin	5,899,939	A	5/1999	Boyce et al.
5,607,474	A	3/1997	Athanasiou et al.	5,902,303	A	5/1999	Eckhof et al.
5,609,635	A	3/1997	Michelson	5,902,338	A	5/1999	Stone
5,609,636	A	3/1997	Kohrs et al.	5,904,683	A	5/1999	Pohndorf et al.
5,609,637	A	3/1997	Biedermann et al.	5,904,719	A	5/1999	Errico et al.
5,616,144	A	4/1997	Yapp et al.	5,906,616	A	5/1999	Pavlov et al.
5,620,448	A	4/1997	Puddu	5,910,315	A	6/1999	Stevenson et al.
5,624,462	A	4/1997	Bonutti	5,911,758	A	6/1999	Oehy et al.
				5,920,312	A	7/1999	Wagner et al.
				5,922,027	A	7/1999	Stone
				5,928,267	A	7/1999	Bonutti et al.
				5,931,838	A	8/1999	Vito

(56)

References Cited

U.S. PATENT DOCUMENTS

5,935,131	A	8/1999	Bonutti	6,235,059	B1	5/2001	Benezech et al.
5,941,900	A	8/1999	Bonutti	6,241,731	B1	6/2001	Fiz
5,944,755	A	8/1999	Stone	6,241,769	B1	6/2001	Nicholson et al.
5,951,558	A	9/1999	Fiz	6,245,108	B1	6/2001	Biscup
5,954,722	A	9/1999	Bono	6,258,089	B1	7/2001	Campbell et al.
5,954,739	A	9/1999	Bonutti	6,258,125	B1	7/2001	Paul et al.
5,958,314	A	9/1999	Draenert	6,261,291	B1	7/2001	Talaber et al.
5,964,807	A	10/1999	Gan et al.	6,261,586	B1	7/2001	McKay
5,968,098	A	10/1999	Winslow	6,264,695	B1	7/2001	Stoy
5,972,031	A	10/1999	Biedermann et al.	6,270,528	B1	8/2001	McKay
5,972,368	A	10/1999	McKay	6,277,136	B1	8/2001	Bonutti
5,976,141	A	11/1999	Haag et al.	6,287,325	B1	9/2001	Bonutti
5,976,187	A	11/1999	Richelsoph	6,306,139	B1	10/2001	Fuentes
5,980,522	A	11/1999	Koros et al.	6,322,562	B1	11/2001	Wolter
5,981,828	A	11/1999	Nelson et al.	6,331,179	B1	12/2001	Freid et al.
5,984,967	A	11/1999	Zdeblick et al.	6,342,074	B1	1/2002	Simpson
5,989,289	A	11/1999	Coates et al.	6,358,266	B1	3/2002	Bonutti
6,001,099	A	12/1999	Huebner	6,361,565	B1	3/2002	Bonutti
6,008,433	A	12/1999	Stone	6,364,880	B1	4/2002	Michelson
6,010,525	A	1/2000	Bonutti et al.	6,368,343	B1	4/2002	Bonutti et al.
6,013,853	A	1/2000	Athanasίου et al.	6,371,986	B1	4/2002	Bagby
6,017,305	A	1/2000	Bonutti	6,371,988	B1	4/2002	Pafford et al.
6,017,345	A	1/2000	Richelsoph	6,371,989	B1	4/2002	Chauvin et al.
6,025,538	A	2/2000	Yaccarino et al.	6,375,681	B1	4/2002	Truscott
6,033,405	A	3/2000	Winslow et al.	6,383,186	B1	5/2002	Michelson
6,033,438	A	3/2000	Bianchi et al.	6,387,130	B1	5/2002	Stone et al.
6,039,762	A	3/2000	McKay	6,395,031	B1	5/2002	Foley et al.
6,042,596	A	3/2000	Bonutti	6,398,811	B1	6/2002	McKay
6,045,579	A	4/2000	Hochschuler et al.	6,413,259	B1	7/2002	Lyons et al.
6,045,580	A	4/2000	Scarborough et al.	6,423,063	B1	7/2002	Bonutti
6,056,749	A	5/2000	Kuslich	6,432,106	B1	8/2002	Fraser
6,059,817	A	5/2000	Bonutti et al.	6,443,987	B1	9/2002	Bryan
6,066,175	A	5/2000	Henderson et al.	6,447,512	B1	9/2002	Landry et al.
6,077,292	A	6/2000	Bonutti	6,447,516	B1	9/2002	Bonutti
6,080,158	A	6/2000	Lin	6,447,546	B1	9/2002	Bramlet et al.
6,080,193	A	6/2000	Hochschuler et al.	6,451,042	B1	9/2002	Bonutti
6,086,593	A	7/2000	Bonutti	6,454,771	B1	9/2002	Michelson
6,086,614	A	7/2000	Mumme	6,458,158	B1	10/2002	Anderson et al.
6,090,998	A	7/2000	Grooms et al.	6,461,359	B1	10/2002	Tribus et al.
6,096,080	A	8/2000	Nicholson et al.	6,464,713	B2	10/2002	Bonutti
6,096,081	A	8/2000	Grivas et al.	6,468,289	B1	10/2002	Bonutti
6,099,531	A	8/2000	Bonutti	6,468,293	B2	10/2002	Bonutti et al.
6,102,928	A	8/2000	Bonutti	6,468,311	B2	10/2002	Boyd et al.
6,110,482	A	8/2000	Khoury et al.	6,471,724	B2	10/2002	Zdeblick et al.
6,113,637	A	9/2000	Gill et al.	6,475,230	B1	11/2002	Bonutti et al.
6,113,638	A	9/2000	Williams et al.	6,482,233	B1	11/2002	Aebi et al.
6,120,503	A	9/2000	Michelson	6,500,195	B2	12/2002	Bonutti
6,123,731	A	9/2000	Boyce et al.	6,503,250	B2	1/2003	Paul
6,129,763	A	10/2000	Chauvin et al.	6,503,267	B2	1/2003	Bonutti et al.
6,132,472	A	10/2000	Bonutti	6,503,277	B2	1/2003	Bonutti
6,136,001	A	10/2000	Michelson	6,511,509	B1	1/2003	Ford et al.
6,139,550	A	10/2000	Michelson	6,524,312	B2	2/2003	Landry et al.
RE36,974	E	11/2000	Bonutti	6,543,455	B2	4/2003	Bonutti
6,143,030	A	11/2000	Schroder	6,558,387	B2	5/2003	Errico et al.
6,143,033	A	11/2000	Paul et al.	6,558,423	B1	5/2003	Michelson
6,146,421	A	11/2000	Gordon et al.	6,558,424	B2	5/2003	Thalgott
6,156,070	A	12/2000	Incavo et al.	6,562,073	B2	5/2003	Foley
6,159,215	A	12/2000	Urbahns et al.	6,565,605	B2	5/2003	Goble et al.
6,159,234	A	12/2000	Bonutti et al.	6,569,187	B1	5/2003	Bonutti et al.
6,171,236	B1	1/2001	Bonutti	6,569,201	B2	5/2003	Moumene et al.
6,171,299	B1	1/2001	Bonutti	6,575,975	B2	6/2003	Brace et al.
6,174,313	B1	1/2001	Bonutti	6,575,982	B1	6/2003	Bonutti
6,187,023	B1	2/2001	Bonutti	6,576,017	B2	6/2003	Foley et al.
6,193,721	B1	2/2001	Michelson	6,579,290	B1	6/2003	Hardcastle et al.
6,193,756	B1	2/2001	Studer et al.	6,585,750	B2	7/2003	Bonutti et al.
6,193,757	B1	2/2001	Foley et al.	6,592,531	B2	7/2003	Bonutti
6,200,347	B1	3/2001	Anderson et al.	6,592,609	B1	7/2003	Bonutti
6,203,565	B1	3/2001	Bonutti et al.	6,592,624	B1	7/2003	Fraser et al.
6,206,922	B1	3/2001	Zdeblick et al.	6,602,291	B1	8/2003	Ray et al.
6,217,617	B1	4/2001	Bonutti	6,605,090	B1	8/2003	Trieu et al.
6,224,602	B1	5/2001	Hayes	6,607,534	B2	8/2003	Bonutti
6,231,592	B1	5/2001	Bonutti et al.	6,616,671	B2	9/2003	Landry et al.
6,231,610	B1	5/2001	Geisler	6,620,163	B1	9/2003	Michelson
6,235,033	B1	5/2001	Brace et al.	6,620,181	B1	9/2003	Bonutti
6,235,034	B1	5/2001	Bray	6,623,486	B1	9/2003	Weaver et al.
				6,629,998	B1	10/2003	Lin
				6,630,000	B1	10/2003	Bonutti
				6,635,073	B2	10/2003	Bonutti
				6,638,309	B2	10/2003	Bonutti

US 10,507,117 B2

Page 5

(56)

References Cited

U.S. PATENT DOCUMENTS

6,638,310 B2	10/2003	Lin et al.	7,087,073 B2	8/2006	Bonutti	
6,645,212 B2	11/2003	Goldhahn et al.	7,094,251 B2	8/2006	Bonutti et al.	
6,652,525 B1	11/2003	Assaker et al.	7,104,996 B2	9/2006	Bonutti	
6,652,532 B2	11/2003	Bonutti	7,112,222 B2 *	9/2006	Fraser	A61B 17/7059 606/247
6,656,181 B2	12/2003	Dixon et al.	7,112,223 B2	9/2006	Davis	
6,679,887 B2	1/2004	Nicholson et al.	7,114,500 B2	10/2006	Bonutti	
6,682,561 B2	1/2004	Songer et al.	7,128,753 B1	10/2006	Bonutti et al.	
6,682,563 B2	1/2004	Scharf	7,134,437 B2	11/2006	Bonutti	
6,695,846 B2	2/2004	Richelsoph et al.	7,135,024 B2	11/2006	Cook et al.	
6,695,851 B2	2/2004	Zdeblick et al.	7,135,043 B2	11/2006	Nakahara et al.	
6,702,821 B2	3/2004	Bonutti	7,137,984 B2	11/2006	Michelson	
6,702,856 B2	3/2004	Bonutti	7,147,652 B2	12/2006	Bonutti et al.	
6,706,067 B2	3/2004	Shimp et al.	7,147,665 B1	12/2006	Bryan et al.	
6,709,456 B2	3/2004	Langberg et al.	7,163,561 B2	1/2007	Michelson	
6,712,818 B1	3/2004	Michelson	7,172,627 B2	2/2007	Fiere et al.	
6,719,803 B2	4/2004	Bonutti	7,172,672 B2	2/2007	Silverbrook	
6,730,127 B2	5/2004	Michelson	7,208,013 B1	4/2007	Bonutti	
6,736,850 B2	5/2004	Davis	7,217,273 B2	5/2007	Bonutti	
6,736,853 B2	5/2004	Bonutti	7,217,290 B2	5/2007	Bonutti	
6,743,257 B2	6/2004	Castro	7,226,452 B2	6/2007	Zubok et al.	
6,761,738 B1	7/2004	Boyd	7,226,482 B2	6/2007	Messerli et al.	
6,761,739 B2	7/2004	Shepard	7,232,463 B2	6/2007	Falahee	
6,770,078 B2	8/2004	Bonutti	7,232,464 B2	6/2007	Mathieu et al.	
6,770,096 B2	8/2004	Bolger et al.	7,238,203 B2	7/2007	Bagga et al.	
6,776,938 B2	8/2004	Bonutti	7,255,698 B2	8/2007	Michelson	
6,786,909 B1	9/2004	Dransfeld et al.	7,276,082 B2	10/2007	Zdeblick et al.	
6,800,092 B1	10/2004	Williams et al.	7,311,719 B2	12/2007	Bonutti	
6,800,093 B2	10/2004	Nicholson et al.	7,320,708 B1	1/2008	Bernstein	
6,805,714 B2	10/2004	Sutcliffe	7,323,011 B2	1/2008	Shepard et al.	
6,808,537 B2	10/2004	Michelson	7,329,263 B2	2/2008	Bonutti et al.	
6,824,564 B2	11/2004	Crozet	7,398,623 B2	7/2008	Martel et al.	
6,833,006 B2	12/2004	Foley et al.	7,429,266 B2	9/2008	Bonutti et al.	
6,835,198 B2	12/2004	Bonutti	7,442,209 B2	10/2008	Michelson	
6,837,905 B1	1/2005	Lieberman	7,462,200 B2	12/2008	Bonutti	
6,849,093 B2	2/2005	Michelson	7,481,831 B2	1/2009	Bonutti	
6,855,167 B2	2/2005	Shimp et al.	7,485,145 B2	2/2009	Purcell	
6,855,168 B2	2/2005	Crozet	7,491,237 B2	2/2009	Randall et al.	
6,860,885 B2	3/2005	Bonutti	7,510,557 B1	3/2009	Bonutti	
6,860,904 B2	3/2005	Bonutti	7,534,265 B1	5/2009	Boyd et al.	
6,863,673 B2	3/2005	Gerbec et al.	7,594,932 B2	9/2009	Aferzon et al.	
6,872,915 B2	3/2005	Koga et al.	7,601,173 B2	10/2009	Messerli et al.	
6,884,242 B2	4/2005	Lehuac et al.	7,608,107 B2	10/2009	Michelson	
6,890,334 B2	5/2005	Brace et al.	7,615,054 B1	11/2009	Bonutti	
6,896,701 B2	5/2005	Boyd et al.	7,618,456 B2	11/2009	Mathieu et al.	
6,899,735 B2	5/2005	Coates et al.	7,621,960 B2	11/2009	Boyd et al.	
6,902,578 B1	6/2005	Anderson et al.	7,625,380 B2	12/2009	Drewry et al.	
6,905,517 B2	6/2005	Bonutti	7,635,390 B1	12/2009	Bonutti	
6,908,466 B1	6/2005	Bonutti et al.	7,637,951 B2	12/2009	Michelson	
6,916,320 B2	7/2005	Michelson	7,655,042 B2	2/2010	Foley et al.	
6,923,756 B2	8/2005	Sudakov et al.	7,704,279 B2	4/2010	Moskowitz et al.	
6,932,835 B2	8/2005	Bonutti et al.	7,708,740 B1	5/2010	Bonutti	
6,953,477 B2	10/2005	Berry	7,708,741 B1	5/2010	Bonutti	
6,962,606 B2	11/2005	Michelson	7,727,283 B2	6/2010	Bonutti	
6,964,664 B2	11/2005	Freid et al.	7,749,229 B1	7/2010	Bonutti	
6,964,687 B1	11/2005	Bernard et al.	7,776,067 B2 *	8/2010	Jackson	A61B 17/7032 606/246
6,972,019 B2	12/2005	Michelson	7,780,670 B2	8/2010	Bonutti	
6,972,035 B2	12/2005	Michelson	7,806,896 B1	10/2010	Bonutti	
6,974,479 B2	12/2005	Trieu	7,806,897 B1	10/2010	Bonutti	
6,984,234 B2	1/2006	Bray	7,828,852 B2	11/2010	Bonutti	
6,989,029 B2	1/2006	Bonutti	7,833,271 B2	11/2010	Mitchell et al.	
6,990,982 B1	1/2006	Bonutti	7,837,736 B2	11/2010	Bonutti	
7,001,385 B2	2/2006	Bonutti	7,846,188 B2	12/2010	Moskowitz et al.	
7,001,432 B2	2/2006	Keller et al.	7,846,207 B2	12/2010	Lechmann et al.	
7,018,412 B2	3/2006	Ferreira et al.	7,854,750 B2	12/2010	Bonutti et al.	
7,018,416 B2	3/2006	Hanson et al.	7,862,616 B2	1/2011	Lechmann et al.	
7,033,394 B2	4/2006	Michelson	7,875,076 B2	1/2011	Mathieu et al.	
7,041,135 B2	5/2006	Michelson	7,879,072 B2	2/2011	Bonutti et al.	
7,044,968 B1	5/2006	Yaccarino et al.	7,892,236 B1	2/2011	Bonutti	
7,044,972 B2	5/2006	Mathys et al.	7,892,261 B2	2/2011	Bonutti	
7,048,755 B2	5/2006	Bonutti et al.	7,896,880 B2	3/2011	Bonutti	
7,048,765 B1	5/2006	Grooms et al.	7,931,690 B1	4/2011	Bonutti	
7,060,097 B2	6/2006	Fraser et al.	7,942,903 B2	5/2011	Moskowitz et al.	
7,066,961 B2	6/2006	Michelson	7,959,635 B1	6/2011	Bonutti	
7,070,557 B2	7/2006	Bonutti	7,985,255 B2	7/2011	Bray et al.	
7,077,864 B2	7/2006	Byrd et al.	7,993,403 B2	8/2011	Foley et al.	
			8,062,303 B2	11/2011	Berry et al.	
			8,100,976 B2	1/2012	Bray et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

8,105,383 B2	1/2012	Michelson	2002/0095160 A1	7/2002	Bonutti
8,128,669 B2	3/2012	Bonutti	2002/0099376 A1	7/2002	Michelson
8,128,700 B2	3/2012	Delurio et al.	2002/0099378 A1	7/2002	Michelson
8,133,229 B1	3/2012	Bonutti	2002/0099444 A1	7/2002	Boyd et al.
8,162,977 B2	4/2012	Bonutti et al.	2002/0106393 A1	8/2002	Bianchi et al.
8,182,532 B2	5/2012	Anderson et al.	2002/0107571 A1	8/2002	Foley
8,187,329 B2	5/2012	Theofilos	2002/0111680 A1	8/2002	Michelson
8,211,148 B2	7/2012	Zhang et al.	2002/0128712 A1	9/2002	Michelson
8,273,127 B2	9/2012	Jones et al.	2002/0128717 A1	9/2002	Alfaro et al.
8,308,804 B2	11/2012	Krueger	2002/0147450 A1	10/2002	Lehuc et al.
8,328,872 B2	12/2012	Duffield et al.	2002/0169508 A1	11/2002	Songer et al.
8,343,220 B2	1/2013	Michelson	2002/0161444 A1	12/2002	Choi
8,343,222 B2	1/2013	Cope	2002/0193880 A1	12/2002	Fraser
8,353,913 B2	1/2013	Moskowitz et al.	2003/0004576 A1	1/2003	Thalgott
8,382,768 B2	2/2013	Berry et al.	2003/0009147 A1	1/2003	Bonutti
8,425,522 B2	4/2013	Bonutti	2003/0023260 A1	1/2003	Bonutti
8,425,607 B2	4/2013	Waugh et al.	2003/0045939 A1	3/2003	Casutt
8,444,696 B2	5/2013	Michelson	2003/0078666 A1	4/2003	Ralph et al.
8,465,546 B2	6/2013	Jodaitis et al.	2003/0078668 A1	4/2003	Michelson
8,486,066 B2	7/2013	Bonutti	2003/0125739 A1	7/2003	Bagga et al.
8,540,774 B2	9/2013	Kueenzi et al.	2003/0135277 A1	7/2003	Bryan et al.
8,545,567 B1	10/2013	Krueger	2003/0153975 A1	8/2003	Byrd et al.
8,613,772 B2	12/2013	Bray et al.	2003/0167092 A1	9/2003	Foley
8,623,030 B2	1/2014	Bonutti	2003/0181981 A1	9/2003	Lemaire
8,632,552 B2	1/2014	Bonutti	2003/0195626 A1	10/2003	Huppert
8,641,726 B2	2/2014	Bonutti	2003/0195632 A1	10/2003	Foley et al.
8,641,743 B2	2/2014	Michelson	2003/0199881 A1	10/2003	Bonutti
8,641,768 B2	2/2014	Duffield et al.	2003/0199983 A1	10/2003	Michelson
8,690,944 B2	4/2014	Bonutti	2004/0010287 A1	1/2004	Bonutti
8,739,797 B2	6/2014	Bonutti	2004/0078078 A1	4/2004	Shepard
8,747,439 B2	6/2014	Bonutti et al.	2004/0078081 A1	4/2004	Ferree
8,764,831 B2	7/2014	Lechmann et al.	2004/0092929 A1	5/2004	Zindrick
8,784,495 B2	7/2014	Bonutti	2004/0093084 A1	5/2004	Michelson
8,795,363 B2	8/2014	Bonutti	2004/0097794 A1	5/2004	Bonutti
8,814,902 B2	8/2014	Bonutti	2004/0098016 A1	5/2004	Bonutti
8,834,490 B2	9/2014	Bonutti	2004/0102848 A1	5/2004	Michelson
8,840,629 B2	9/2014	Bonutti	2004/0102850 A1	5/2004	Shepard
8,845,699 B2	9/2014	Bonutti	2004/0126407 A1	7/2004	Falahee
8,858,557 B2	10/2014	Bonutti	2004/0133278 A1	7/2004	Marino et al.
8,956,417 B2	2/2015	Bonutti	2004/0138689 A1	7/2004	Bonutti
9,005,295 B2	4/2015	Kueenzi et al.	2004/0138690 A1	7/2004	Bonutti
9,044,322 B2	6/2015	Bonutti	2004/0143270 A1	7/2004	Zucherman et al.
9,044,341 B2	6/2015	Bonutti	2004/0143285 A1	7/2004	Bonutti
9,050,152 B2	6/2015	Bonutti	2004/0172033 A1	9/2004	Bonutti
9,149,365 B2	10/2015	Lawson et al.	2004/0176853 A1	9/2004	Sennett et al.
9,241,809 B2	1/2016	McDonough et al.	2004/0193181 A1	9/2004	Bonutti
9,364,340 B2	6/2016	Lawson et al.	2004/0193269 A1	9/2004	Fraser et al.
9,414,935 B2	8/2016	McDonough et al.	2004/0199254 A1	10/2004	Louis et al.
9,463,097 B2	10/2016	Lechmann et al.	2004/0210219 A1	10/2004	Bray
9,744,049 B2	8/2017	Kueenzi et al.	2004/0210310 A1	10/2004	Trieu
9,883,950 B2	2/2018	Bertagnoli et al.	2004/0210314 A1	10/2004	Michelson
2001/0001129 A1	5/2001	McKay et al.	2004/0220668 A1	11/2004	Eisermann et al.
2001/0005796 A1	6/2001	Zdeblick et al.	2004/0230223 A1	11/2004	Bonutti et al.
2001/0010021 A1	7/2001	Boyd et al.	2004/0249377 A1	12/2004	Kaes et al.
2001/0016777 A1	8/2001	Biscup	2004/0254644 A1	12/2004	Taylor
2001/0020186 A1	9/2001	Boyce et al.	2004/0260427 A1	12/2004	Wimsatt
2001/0023371 A1	9/2001	Bonutti	2005/0015149 A1	1/2005	Michelson
2001/0031254 A1	10/2001	Bianchi et al.	2005/0021042 A1	1/2005	Marnay et al.
2001/0039456 A1	11/2001	Boyer et al.	2005/0021143 A1	1/2005	Keller
2001/0041941 A1	11/2001	Boyer et al.	2005/0033433 A1	2/2005	Michelson
2001/0049560 A1	12/2001	Paul et al.	2005/0049593 A1	3/2005	Duong et al.
2002/0004683 A1	1/2002	Michelson	2005/0049595 A1	3/2005	Suh et al.
2002/0010511 A1	1/2002	Michelson	2005/0065605 A1	3/2005	Jackson
2002/0016595 A1	2/2002	Michelson	2005/0065607 A1	3/2005	Gross
2002/0022843 A1	2/2002	Michelson	2005/0065608 A1	3/2005	Michelson
2002/0029055 A1	3/2002	Bonutti	2005/0071008 A1	3/2005	Kirschman
2002/0029084 A1	3/2002	Paul et al.	2005/0085913 A1	4/2005	Fraser et al.
2002/0040246 A1	4/2002	Bonutti	2005/0101960 A1	5/2005	Fiere et al.
2002/0049497 A1	4/2002	Mason	2005/0113918 A1	5/2005	Messerli et al.
2002/0065517 A1	5/2002	Paul	2005/0113920 A1	5/2005	Foley et al.
2002/0082597 A1	6/2002	Fraser	2005/0125029 A1	6/2005	Bernard et al.
2002/0082603 A1	6/2002	Dixon et al.	2005/0149193 A1	7/2005	Zucherman et al.
2002/0082803 A1	6/2002	Schiffbauer	2005/0154391 A1	7/2005	Doherty et al.
2002/0091447 A1	7/2002	Shimp et al.	2005/0159813 A1	7/2005	Molz, IV
2002/0095155 A1	7/2002	Michelson	2005/0159818 A1	7/2005	Blain
			2005/0159819 A1	7/2005	McCormack et al.
			2005/0171606 A1	8/2005	Michelson
			2005/0171607 A1	8/2005	Michelson
			2005/0177236 A1	8/2005	Mathieu et al.

US 10,507,117 B2

Page 7

(56)

References Cited

U.S. PATENT DOCUMENTS

2005/0216059 A1 9/2005 Bonutti et al.
 2005/0222683 A1 10/2005 Berry
 2005/0240267 A1 10/2005 Randall et al.
 2005/0240271 A1 10/2005 Zubok et al.
 2005/0261767 A1 11/2005 Anderson et al.
 2005/0267534 A1 12/2005 Bonutti et al.
 2006/0020342 A1 1/2006 Ferree et al.
 2006/0030851 A1 2/2006 Bray et al.
 2006/0079901 A1 4/2006 Ryan et al.
 2006/0079961 A1 4/2006 Michelson
 2006/0085071 A1 4/2006 Lechmann et al.
 2006/0089717 A1 4/2006 Krishna et al.
 2006/0129240 A1 6/2006 Lessar et al.
 2006/0136063 A1 6/2006 Zeegers
 2006/0142765 A9 6/2006 Dixon et al.
 2006/0167495 A1 7/2006 Bonutti et al.
 2006/0195189 A1 8/2006 Link et al.
 2006/0195193 A1 8/2006 Bloemer
 2006/0206208 A1 9/2006 Michelson
 2006/0229725 A1 10/2006 Lechmann et al.
 2006/0235470 A1 10/2006 Bonutti et al.
 2006/0265009 A1 11/2006 Bonutti
 2007/0088358 A1 4/2007 Yuan et al.
 2007/0088441 A1 4/2007 Duggal et al.
 2007/0093819 A1 4/2007 Albert
 2007/0106384 A1 5/2007 Bray et al.
 2007/0118125 A1 5/2007 Orbay et al.
 2007/0123987 A1 5/2007 Bernstein
 2007/0162130 A1 7/2007 Rashbaum et al.
 2007/0168032 A1 7/2007 Muhanna et al.
 2007/0177236 A1 8/2007 Kijima et al.
 2007/0208378 A1 9/2007 Bonutti et al.
 2007/0219365 A1 9/2007 Joyce et al.
 2007/0219635 A1 9/2007 Mathieu et al.
 2007/0225806 A1 9/2007 Squires et al.
 2007/0225812 A1 9/2007 Gill
 2007/0250167 A1 10/2007 Bray et al.
 2007/0270961 A1 11/2007 Ferguson
 2008/0033440 A1 2/2008 Moskowitz et al.
 2008/0039873 A1 2/2008 Bonutti et al.
 2008/0047567 A1 2/2008 Bonutti
 2008/0051890 A1 2/2008 Waugh et al.
 2008/0058822 A1 3/2008 Bonutti
 2008/0065140 A1 3/2008 Bonutti
 2008/0082169 A1 4/2008 Gittings et al.
 2008/0103519 A1 5/2008 Bonutti
 2008/0108916 A1 5/2008 Bonutti et al.
 2008/0114399 A1 5/2008 Bonutti
 2008/0119933 A1 5/2008 Aebi et al.
 2008/0132949 A1 6/2008 Aferzon et al.
 2008/0133013 A1 6/2008 Duggal et al.
 2008/0140116 A1 6/2008 Bonutti
 2008/0140117 A1 6/2008 Bonutti et al.
 2008/0161925 A1 7/2008 Brittan et al.
 2008/0177307 A1 7/2008 Moskowitz et al.
 2008/0188940 A1 8/2008 Cohen et al.
 2008/0200984 A1 8/2008 Jodaitis et al.
 2008/0234822 A1 9/2008 Govil et al.
 2008/0249569 A1 10/2008 Waugh et al.
 2008/0249575 A1 10/2008 Waugh et al.
 2008/0249622 A1 10/2008 Gray
 2008/0249625 A1 10/2008 Waugh et al.
 2008/0269806 A1 10/2008 Zhang et al.
 2008/0275455 A1 11/2008 Berry et al.
 2008/0281425 A1 11/2008 Thalgott et al.
 2008/0306596 A1 12/2008 Jones et al.
 2008/0312742 A1 12/2008 Abernathie
 2009/0076608 A1 3/2009 Gordon et al.
 2009/0088849 A1 4/2009 Armstrong et al.
 2009/0099661 A1 4/2009 Bhattacharya et al.
 2009/0105830 A1 4/2009 Jones et al.
 2009/0132051 A1 5/2009 Moskowitz et al.
 2009/0192613 A1 7/2009 Wing et al.
 2009/0210062 A1 8/2009 Thalgott et al.
 2009/0210064 A1 8/2009 Lechmann et al.

2009/0234455 A1 9/2009 Moskowitz et al.
 2009/0326580 A1 12/2009 Anderson et al.
 2010/0016901 A1 1/2010 Robinson
 2010/0125334 A1 5/2010 Krueger
 2010/0145459 A1 6/2010 McDonough et al.
 2010/0145460 A1 6/2010 McDonough et al.
 2010/0305704 A1 12/2010 Messerli et al.
 2010/0312346 A1* 12/2010 Kueenzi A61F 2/4455
 623/17.16
 2011/0087327 A1 4/2011 Lechmann et al.
 2011/0118843 A1 5/2011 Mathieu et al.
 2011/0137417 A1 6/2011 Lee
 2011/0166660 A1 7/2011 Laurence
 2011/0230971 A1 9/2011 Donner et al.
 2011/0238184 A1 9/2011 Zdeblick et al.
 2011/0295371 A1 12/2011 Moskowitz et al.
 2012/0010623 A1 1/2012 Bonutti
 2012/0101581 A1 4/2012 Mathieu et al.
 2012/0109309 A1 5/2012 Mathieu et al.
 2012/0109310 A1 5/2012 Mathieu et al.
 2012/0109311 A1 5/2012 Mathieu et al.
 2012/0109312 A1 5/2012 Mathieu et al.
 2012/0109313 A1 5/2012 Mathieu et al.
 2012/0179259 A1 7/2012 McDonough et al.
 2012/0197401 A1 8/2012 Duncan et al.
 2012/0215226 A1 8/2012 Bonutti
 2012/0215233 A1 8/2012 Bonutti et al.
 2012/0221017 A1 8/2012 Bonutti
 2012/0323330 A1 12/2012 Kueenzi et al.
 2013/0073046 A1 3/2013 Zaveloff et al.
 2013/0073047 A1 3/2013 Laskowitz et al.
 2013/0166032 A1 6/2013 McDonough et al.
 2013/0173013 A1 7/2013 Anderson et al.
 2013/0226185 A1 8/2013 Bonutti
 2013/0237989 A1 9/2013 Bonutti
 2013/0268008 A1 10/2013 McDonough et al.
 2013/0289729 A1 10/2013 Bonutti
 2014/0018854 A1 1/2014 Bonutti et al.
 2014/0025110 A1 1/2014 Bonutti et al.
 2014/0025111 A1 1/2014 Bonutti et al.
 2014/0025112 A1 1/2014 Bonutti
 2014/0025168 A1 1/2014 Klimek et al.
 2014/0100663 A1 4/2014 Messerli et al.
 2014/0121777 A1 5/2014 Rosen et al.
 2014/0180422 A1 6/2014 Klimek et al.
 2014/0214166 A1 7/2014 Theofilos
 2014/0228963 A1 8/2014 Bonutti
 2014/0243985 A1 8/2014 Lechmann et al.
 2014/0257380 A1 9/2014 Bonutti
 2014/0257487 A1 9/2014 Lawson et al.
 2014/0277456 A1 9/2014 Kirschman
 2014/0309560 A1 10/2014 Bonutti
 2014/0336770 A1 11/2014 Petersheim et al.
 2014/0343573 A1 11/2014 Bonutti
 2014/0371859 A1 12/2014 Petersheim et al.
 2015/0257893 A1 9/2015 Mazzuca et al.
 2015/0320571 A1 11/2015 Lechmann et al.
 2016/0113774 A1 4/2016 Schmura et al.

FOREIGN PATENT DOCUMENTS

CA 2317791 A1 8/1999
 CN 1383790 A 12/2002
 CN 1620271 A 5/2005
 CN 1701772 A 11/2005
 CN 1901853 A 1/2007
 DE 2821678 A 11/1979
 DE 3042003 A1 7/1982
 DE 3933459 A1 4/1991
 DE 4242889 A1 6/1994
 DE 4409392 A1 9/1995
 DE 4423257 A1 1/1996
 DE 19504867 C1 2/1996
 DE 29913200 U1 9/1999
 DE 202004020209 U1 5/2006
 EP 0179695 A1 4/1986
 EP 0302719 A1 2/1989
 EP 0505634 A1 9/1992
 EP 0577178 A1 1/1994

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	0639351	A2	2/1995
EP	0425542	B1	3/1995
EP	0504346	B1	5/1995
EP	0517030	B1	9/1996
EP	0897697	A1	2/1999
EP	0605799	B1	4/1999
EP	0641547	B1	5/1999
EP	0966930	A1	12/1999
EP	0968692	A1	1/2000
EP	0974319	A2	1/2000
EP	1124512	A1	8/2001
EP	1194087	A1	4/2002
EP	1393689	A2	3/2004
EP	1402836	A2	3/2004
EP	1033941	B1	8/2004
EP	0906065	B1	9/2004
EP	1051133	B1	10/2004
EP	1103236	B1	8/2006
EP	1459711	B1	7/2007
EP	1847240	A1	10/2007
FR	2552659	A3	4/1985
FR	2697996	A1	5/1994
FR	2700947	A1	8/1994
FR	2703580	A1	10/1994
FR	2727003	A1	5/1996
FR	2747034	A1	10/1997
FR	2753368	A1	3/1998
GB	0157668	A	1/1921
GB	0265592	A	8/1927
GB	2148122	A	5/1985
GB	2207607	A	2/1989
GB	2239482	A	7/1991
GB	2266246	A	10/1993
JP	03-505416	A	11/1991
JP	09-280219	A	10/1997
JP	2006-513752	A	4/2006
RU	2229271	C1	5/2004
RU	2244527	C2	1/2005
RU	2307625	C1	10/2007
SU	1465040	A1	3/1989
WO	88/03417	A1	5/1988
WO	88/10100	A1	12/1988
WO	89/09035	A1	10/1989
WO	90/00037	A1	1/1990
WO	92/01428	A1	2/1992
WO	92/06005	A1	4/1992
WO	93/01771	A1	2/1993
WO	95/08964	A2	4/1995
WO	95/15133	A1	6/1995
WO	95/20370	A1	8/1995
WO	95/21053	A1	8/1995
WO	95/26164	A1	10/1995
WO	96/39988	A2	12/1996
WO	96/40015	A1	12/1996
WO	97/20526	A1	6/1997
WO	97/23175	A1	7/1997
WO	97/25941	A1	7/1997
WO	97/25945	A1	7/1997
WO	97/37620	A1	10/1997
WO	97/39693	A1	10/1997
WO	98/17208	A2	4/1998
WO	98/17209	A2	4/1998
WO	98/55052	A1	12/1998
WO	98/56319	A1	12/1998
WO	98/56433	A1	12/1998
WO	99/09896	A1	3/1999
WO	99/09903	A1	3/1999
WO	99/27864	A2	6/1999
WO	99/29271	A1	6/1999
WO	99/32055	A1	7/1999
WO	99/38461	A2	8/1999
WO	99/38463	A2	8/1999
WO	99/56675	A1	11/1999
WO	99/63914	A1	12/1999
WO	00/07527	A1	2/2000

WO	00/07528	A1	2/2000
WO	00/25706		5/2000
WO	00/30568	A1	6/2000
WO	00/40177	A1	7/2000
WO	00/41654	A2	7/2000
WO	00/59412	A1	10/2000
WO	00/66044	A1	11/2000
WO	00/66045	A1	11/2000
WO	00/74607	A1	12/2000
WO	01/03615	A1	1/2001
WO	01/08611	A1	2/2001
WO	01/56497	A2	8/2001
WO	01/62190	A1	8/2001
WO	01/80785	A1	11/2001
WO	01/93742	A2	12/2001
WO	01/95837	A1	12/2001
WO	2004/000177	A1	12/2003
WO	2004/069106	A1	8/2004
WO	2005/007040	A1	1/2005
WO	2005/020861	A1	3/2005
WO	2006/138500	A2	12/2006
WO	07/98288	A2	8/2007
WO	2008/014258	A2	1/2008
WO	2008/082473	A1	7/2008
WO	2008/102174	A2	8/2008
WO	2008/124355	A1	10/2008
WO	2008/154326	A1	12/2008
WO	2009/064644	A1	5/2009
WO	2009/158319	A1	12/2009
WO	2010/054181	A1	5/2010
WO	2010/054208	A1	5/2010
WO	2012/088238	A2	6/2012

OTHER PUBLICATIONS

Chadwick et al., "Radiolucent Structural Materials for Medical Application", www.mddonline.com/print/238 Jun. 2001, accessed Jul. 31, 2012, 9 pages.

Carbon Fiber Composite Ramps for Lumbar Interbody Fusion; Apr. 1997, 2 pages.

Bray, InterPlate Vertebral Body Replacement; website accessed May 4, 2017; <http://rsbspine.com/Products.aspx>, 2 pages.

Bray, "InterPlate Spine Fusion Device: Subsidence Control Without Stress Shielding", Orthopaedic Product News, Sep./Oct. 2006, pp. 22-25.

Brantigan, Pseudarthrosis Rate After Allograft Posterior Lumbar Interbody Fusion with Pedicle Screw and Plate Fixation, 19(11) Spine 1270-1280, Jun. 1994.

Brantigan, Intervertebral Fusion, Chapter 27, posterior Lumbar Interbody Fusion Using the Lumbar Interbody Fusion Sage, 437-466, 2006.

Brantigan, Interbody Lumbar Fusion Using a Carbon Fiber Cage Implant Versus Allograft Bone, 19(13) Spine 1436-1444, 1994.

Brantigan, Compression Strength of Donor Bone for Posterior Lumbar Interbody Fusion, 18(9) Spine 1213-1221, 1993.

Brantigan, A Carbon Fiber Implant to Aid Interbody Lumbar Fusion, 16(6S) Spine S277-S282, Jul. 1991.

Brantigan I/F Cage for PLIF Surgical Technique Guide; Apr. 1991, 22 pages.

Benezech, L'arthrodese Cervicale Par Voie Anterieure a L'Aide de Plaque-Cage P.C.B., 3(1) Rach is 1,47,1997 (w/ Translation).

Banward, Iliac Crest Bone Graft Harvest Donor Site Morbidity, 20 (9) Spine 1055-1060, May 1995.

Bailey, Stabilization of the Cervical Spine by Anterior Fusion, 42-A(4), J. Bone Joint Surg., 565-594, Jun. 1960.

Appendix 3 to Joint Claim Construction Brief, Exhibits A-C, In the United States District Court for the District of Delaware Civil Action No. 1: 11-cv-00652-LPS, Jun. 8, 2012, 38 pages.

Appendix 2 to Joint Claim Construction Brief, Globus' Exhibits A-F, In the United States District Court for the District of Delaware Civil Action No. 1 :11-cv-00652-LPS, Jun. 8, 2012, 146 pages.

Appendix 1 to Joint Claim Construction Brief, A-Synthes' Exhibits A-9, In the United States District Court for the District of Delaware Civil Action No. 1 :11-cv-00652-LPS, Jun. 8, 2012, 192 pages.

Al-Sanabani, Application of Calcium Phosphate Materials in Dentistry, vol. 2013, Int. J. Biomaterials, 1-12, 2013.

(56)

References Cited**OTHER PUBLICATIONS**

- AcroMed Carbon Fiber Interbody Fusion Devices; Jan. 1998, 8 pages.
- Younger, Morbidity at Bone Graft Donor Sites, 3(3) J. Orth. Trauma, 192-195, 1989.
- Written Opinion, dated Mar. 20, 2009, for PCT International Application No. PCT/US08/82473, filed Nov. 5, 2008.
- Wilson, Anterior Cervical Discectomy without Bone Graft, 47(4) J. Neurosurg. 551-555, Oct. 1977.
- Whitesides, Lateral Approach to the Upper Cervical Spine for Anterior Fusion, vol. 59, South Med J, 879-883, Aug. 1966.
- White, Relief of Pain by Anterior Cervical-Spine Fusion for Spondylosis, 55-A(3) J. Bone Joint Surg. 525-534, Apr. 1973.
- Weiner, Spine Update Lumbar Interbody Cages, 23(5) Spine, 634-640, Mar. 1998.
- Watters, Anterior Cervical Discectomy with and without Fusion, 19(20) Spine 2343-2347 Oct. 1994.
- Wang, Increased Fusion Rates with Cervical Plating for Two-Level Anterior Cervical Discectomy and Fusion, 25(1) Spine 41-45, Jan. 2000.
- Wang, Determination of Cortical Bone Porosity and Pore Size Distribution using a Low Field Pulsed NMR Approach, J. Orthop Res., Mar.; 21(2):312-9 Mar. 2003.
- Verbiest H., La Chirurgie Anterieure et Laterale du Rachis Cervical, 16(S2) Neurochirurgie 1-212; 1970 (w/Translation).
- U.S. Provisional Application filed Sep. 16, 2011 by Jillian Zaveloff, entitled "Multi-Piece Intervertebral Implants", U.S. Appl. No. 61/535,726.
- U.S. Provisional Application filed Nov. 16, 2007 by Thomas Kueenzi et al., entitled "Low profile intervertebral implant", U.S. Appl. No. 60/988,661.
- U.S. Appl. No. 11/199,599: Preliminary Amendment, dated Jan. 9, 2008, 11 pages.
- U.S. Appl. No. 11/199,599: Non-Final Rejection, dated Apr. 1, 2009, 20 pages.
- U.S. Appl. No. 11/199,599: Interview Summary included Draft Amendments, dated Sep. 24, 2009, 16 pages.
- U.S. Appl. No. 11/199,599: Final Rejection, dated Dec. 24, 2009, 21 pages.
- U.S. Appl. No. 11/199,599: Appeal Brief, dated Apr. 15, 2010, 51 pages.
- U.S. Appl. No. 11/199,599: Amendment/Request for Reconsideration after Non-Final Rejection, dated Sep. 29, 2009, 30 pages.
- U.S. Provisional Application filed Dec. 19, 1997, by David J. Urbahns et al Entitled Insertion Instruments UID Method for Delivering a Vertebral Body Spacer, U.S. Appl. No. 60/068,205.
- U.S. Provisional Application filed Jan. 15, 1998 by David J. Urbahns et al Entitled Insertion Instruments and Method for Delivering a Vertebral Body Spacer., U.S. Appl. No. 60/071,527.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 7, 2013, 97 pages.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 6, 2013.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 5, 2013, 99 pages.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 4, 2013, 110 pages.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 3, 2013, 98 pages.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 14, 2013, 26 pages.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 13, 2013, 94 pages.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 12, 2013, 75 pages.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 11, 2013, 98 pages.
- Trial Transcript, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 10, 2013, 114 pages.
- Tan, A Modified Technique of Anterior Lumbar Fusion with Femoral Cortical Allograft, 5(3) J. Ortho. Surg. Tech., 83-93, 1990.
- Tamariz, Biodegradation of Medical Purpose Polymeric Materials and Their Impact on Biocompatibility, Chapter 1, Intech-bio degradation Life of Science, 2013; 28 pages.
- Takahama, A New Improved Biodegradable Tracheal Prosthesis Using Hydroxy Apatite and Carbon Fiber 35(3) ASAIO Trans, 291-293, Jul.-Sep. 1989.
- Synthes Zero-P Instruments and Implants Technique Guide dated 2008.
- Synthes SynFix-LR System Technique Guide dated 2008.
- Synthes Spine, "Zero-P Instruments and Implants. Zero-Profile Anterior Cervical Interbody Fusion (ACIF) device", Technique Guide dated 2008, pp. 2-32, Published by Synthes Spine (USA).
- Synthes Spine, "SynFix-LR System, Instruments and Implants for Stand-Alone Anterior Lumbar Interbody Fusion (ALIF)", Technique Guide dated 2008, pp. 2-40, Published by Synthes Spine (USA).
- Synthes Spine, "CorticoCancellous ACF Spacer. An allograft space or anterior fusion of the cervical spine," brochure, Musculoskeletal Transplant Foundationm, 2003, 6 pages.
- Synthes Spine Cervical Stand-Alone Devices Presentation Brochure; 2010, 40 pages.
- Synthes History and Evolution of LBIF Brochure; Nov. 2015, 30 pages.
- Spruit et al., "The in Vitro Stabilizing Effect of Polyetheretherketone Cages Versus a Titanium Cage of similar design for anterior lumbar interbody fusion", Eur. Spine J., Aug. 2005, 14 752-758.
- Sonntag, Controversy in Spine Care, Is Fusion Necessary After Anterior Cervical Discectomy 21(9) Spine, 1111-1113, May 1996.
- Second Expert Report of Wilson C. Hayes, Ph.D., United States District Court for the District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Dec. 14, 2012, 22 pages.
- Scholz et al., "A New Stand-Alone Cervical Anterior Interbody Fusion Device", Spine, Jan. 2009, 34(2), 6 pages.
- Schleicher et al., "Biomechanical Comparison of Two Different Concepts for Stand alone anterior lumbar interbody fusion", Eur. Spine J., Sep. 2008, 17, 1757-1765.
- Samandouras, A New Anterior Cervical Instrumentation System Combinin an Intradiscal Cage with an Integrated plate, 26(10) Spine, 1188-1192, 2001.
- Russian Patent Application No. 2011-1122797: Decision to Grant dated Oct. 9, 2013, 20 pages.
- Reply Report of Dr. Domagoj Carle Regarding the Invalidity of U.S. Pat. No. 7,846,207, U.S. Pat. No. 7,862,616 and U.S. Pat. No. 7,875,076, in the United States District Court for the District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jan. 4, 2013, 81 pages.
- Redacted version of "Plaintiff's Reply Brief in Support of Plaintiff's Motion for Summary Judgment of No Anticipation by the Kozak and Michelson References", Mar. 21, 2013, 11 pages.
- Redacted version of "Opening Brief in Support of Plaintiffs' Motion for Summary Judgment of No Anticipation by the Kozak and Michelson References", United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Feb. 13, 2013, 66 pages.
- Redacted version of "Defendant Globus Medical, Inc.'s Answering Brief in Opposition to Plaintiff's Motion for Summary Judgment of No Anticipation by the Kozak and Michelson References", Mar. 12, 2013, 233 pages.
- Porex Website, <http://www.porex.com/technologies/materials/porous-plastics>, Porous Elastic Materials, accessed Aug. 21, 2015, 2 pages.
- Polysciences Inc. Info Sheet 2012.
- Plaintiffs' Supplemental Responses and Objections to Defendant Globus Medical Inc.'s Interrogatories Nos. 6-10 and Second Supplemental Responses and Objections to Interrogatory No. 5, United States District Court for the District of Delaware, Civil Action No. 11-cv-652-LPS, Sep. 1, 2012, 12 pages.
- Plaintiffs' Responses and Objections to Defendant Globus Medical, Inc.'s First Set of Interrogatories (Nos. 1-11), United States District Court for the District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Nov. 14, 2011, 18 pages.

(56)

References Cited

OTHER PUBLICATIONS

PCT International Application No. PCT/US2009/063529: International Search Report and Written Opinion dated Apr. 14, 2010, 19 pages.

PCB Evolution Surgical Technique Guide 2010.

Parlov et al., "Anterior Lumbar Interbody Fusion with Threaded Fusion Cages and Autologous Grafts", *Eur. Spine J.*, 1000, 9, 224-229.

Order, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, May 7, 2013, 7 pages.

Order, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, May 15, 2013, 4 pages.

Nasca, Newer Lumbar Interbody Fusion Techniques, 22(2) *J. Surg. Ortho. Advances*, 113-117, 2013.

Memorandum Opinion, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, May 7, 2013, 33 pages.

McAfee, Minimally Invasive Anterior Retroperitoneal Approach to the Lumbar Spine, 21(13) *Spine*, 1476-1484, 1998.

Marcolongo et al., "Trends in Materials for Spine Surgery", *Biomaterials and Clinical Use*, 6, 2011, 21 pages.

Malca, Cervical Interbody Xenograft with Plate Fixation, 21 (6) *Spine*, 685-690, Mar. 1996.

Lyu, Degradability of Polymers for Implantable Biomedical Devices, 10, *Int. J. Mol. Sci.*, 1033-4065, 2009.

Lund, Interbody Cage Stabilisation in the Lumbar Spine, 80-B(2) *J Bone Joint Surg.*, 351-359, Mar. 1998.

Kroppenstedt, Radiological Comparison of Instrumented Posterior Lumbar Interbody Fusion with One or Two Closed-Box Plasmapore Coated Titanium Cages, 33(19) *Spine*, 2083-2088, Sep. 2008.

Kozak, Anterior Lumbar Fusion Options, No. 300, *Clin. Orth. Rel. Res.*, 45-51, 1994.

Khan, Chapter 2—Implantable Medical Devices, Focal Controlled Drug Delivery, *Advances in Delivery Science and Technology*, A.J. Domb and W. Khan (eds.) 2014.

Kastner, Advanced X-Ray Tomographic Methods for Quantitative Characterisation of Carbon Fibre Reinforced Polymers, 4th Annual Intern. Symposium on NDT in Aerospace, 2012, 9 pages.

Jury Verdict Form, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 14, 2013, 20 pages.

Jury Trial Demanded, In the United States District Court for the District of Delaware, Case No. 1:11-cv-00652-LPS, filed Jul. 22, 2011, 8 pages.

Jost, Compressive Strength of Interbody Cages in the Lumbar Spine: the Effect of Cage Shape, Posterior Instrumentation and Bone Density, 7 *Eur. Spine J.* 132-141, 1998.

Jonbergen et al., "Anterior Cervical Interbody fusion with a titanium box cage: Early radiological assessment of fusion and subsidence", *The Spine Journal* 5, Jul. 2005, 645-649.

Joint Claim Construction Brief, In the United States District Court for the District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Jun. 14, 2012, 97 pages.

Japanese Patent Application No. 2011-534928: Office Action dated Sep. 30, 2013, 11 pages.

Japanese Patent Application No. 2011-534926: Office Action dated Oct. 30, 2013, 7 pages.

International Search Report, dated Mar. 20, 2009, for PCT International Application No. PCT/US08/82473, filed Nov. 5, 2008.

International Search Report, completed Aug. 16, 2007 for International Application No. PCT/US2007/005098, filed Feb. 27, 2007, 5 pgs.

International Patent Application PCT/US2011/066421, International Search Report dated Jun. 14, 2012, 31 pages.

International Patent Application No. PCT/CH2003/00089, International Search Report dated Dec. 2, 2003, 3 pgs.

Huttner, Spinal Stenosis & Posterior Lumbar Interbody Fusion, No. 193, *Clinical Ortho Rel. Res.* 103-114, Mar. 1985.

Gunatillake, Biodegradable Synthetic Polymers for Tissue Engineering, vol. 5, *Eur. Cells Materials*, 1-16, 20003.

Graham, Lateral Extracavitary Approach to the Thoracic and Thoracolumbar Spine, 20(7) *Orthopedics*, 605-610, Jul. 1997.

Germay, Resultats Cliniques de Ceramiques D'hydroxyapatite dans les arthroses Inter-somatiques du Rachis Dervical Par Voie Anterieure. Etude Retrospective a Propose de 67 cas, 13(3), *Rachis* 189-195, 2001 (w/Translation).

Fuentes, Les Complications de la Chirurgie Par Voie Anterieure du Rachis Cervical, 8(1) *Rachis* 3-14, 1996 (w/ translation).

Fowler, Complications Associated with Harvesting Autogenous Iliac Bone Graft, 24(12) *Am. J. Ortho.* 895-904, Dec. 1995.

Fassio, Use of Cervical Plate-Cage PCB and Results for Anterior Fusion in Cervical Disk Syndrome, 15(6) *Rachis* 355-361, Dec. 2003 Translation.

Expert Report of Richard J. Gering, Ph.D., CLP in the United States District Court for the District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Dec. 14, 2012, 39 pages.

Expert Report of Paul Ducheyne, PH.D. Concerning Patent Validity, United States District Court District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Dec. 13, 2012, 155 pages.

Expert Report of John F. Hall, M.D., United States District Court for the District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Dec. 14, 2012, 27 pages.

Expert Report of Dr. Domagoj Carle Regarding the Invalidity of U.S. Pat. No. 7,846,207, U.S. Pat. No. 7,862,616 and U.S. Pat. No. 7,875,076, in the United States District Court for the District of Delaware, Civil Action No. 1:11-cv-00652-LPS, Nov. 5, 2012, 149 pages.

Enker, Interbody Fusion and Instrumentation, No. 300 *Clin. Orth. Rel. Res.* 90-101, Mar. 1994.

Dickman, Internal Fixation and Fusion of the Lumbar Spine Using Threaded Interbody Cages, 13(3) *Barrow Quarterly* (1997); http://www.thebarrow.org/Education_And_Resources/Barrow_Quarterly/204837.

Dereymaeker, Nouvelle Cure neuro-Chirurgicale de discopathies Cervicales, 2 *Neurochirurgie* 226-234; 1956 (w/Translation).

DePuy Motech Surgical Titanium Mesh Brochure; 1998, 13 pages.

Delecrin, Morbidite du Prelevement de Greffons osseux au Niveau des Creh' : S Iliques dans la Chirurgie Du Rachis; Justification du recours aux substituts osseux, 13(3) *Rachis* 167-174, 2001 (w/Translation).

Dabrowski, Highly Porous Titanium Scaffolds for Orthopaedic Applications, *J. Biomed Mater. Res. B. Appl. Biomat.* Oct.; 95(1):53-61, 2010.

Cloward, The Anterior Approach for Removal of Ruptured Cervical Disks, vol. 15, *J. Neuro.* 602-617, 1958.

* cited by examiner

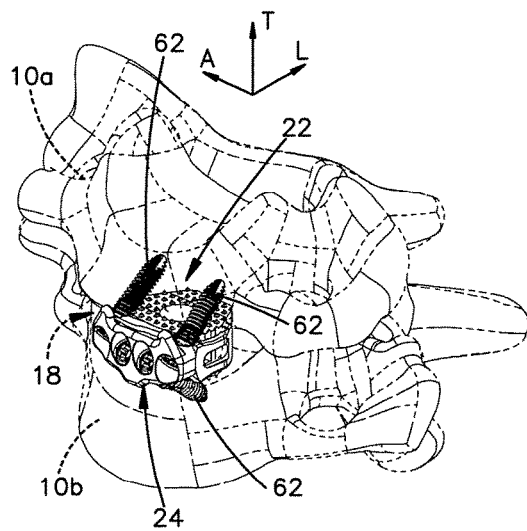


Fig.1A

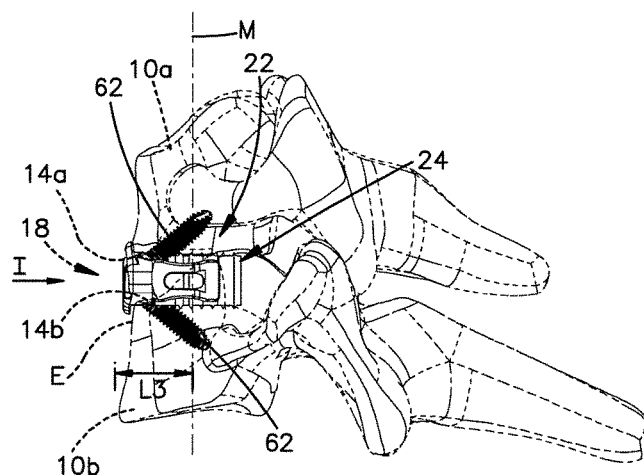


Fig.1B

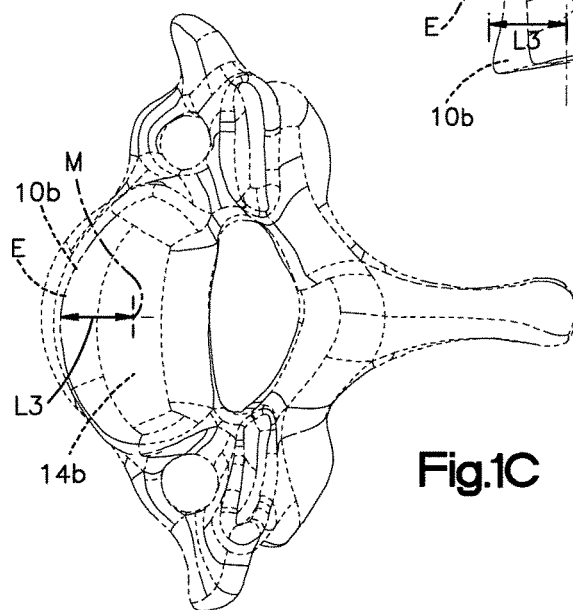
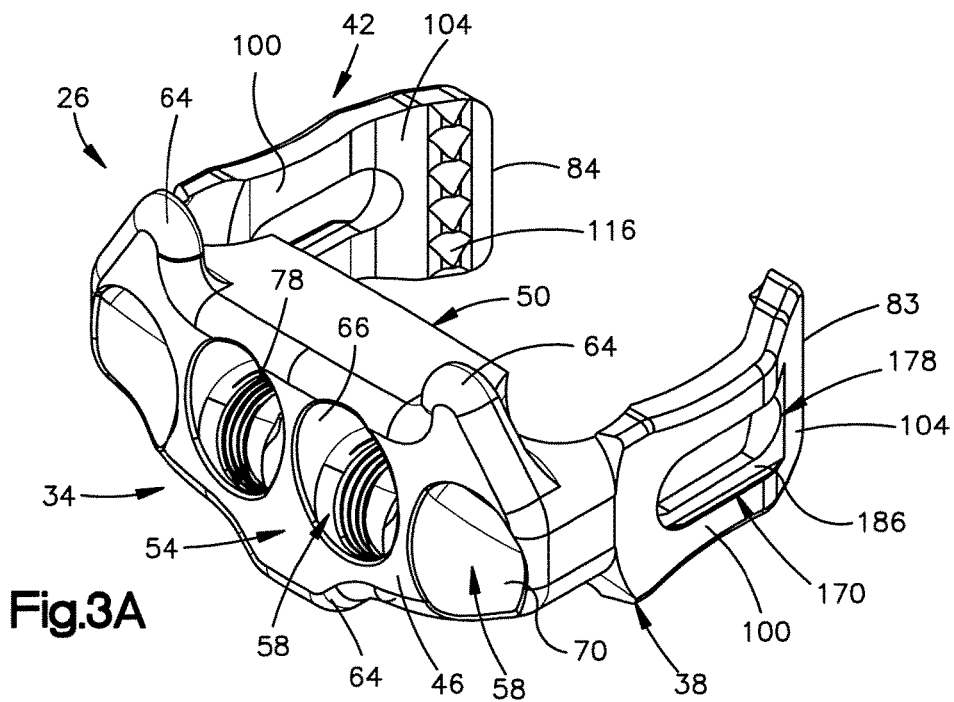
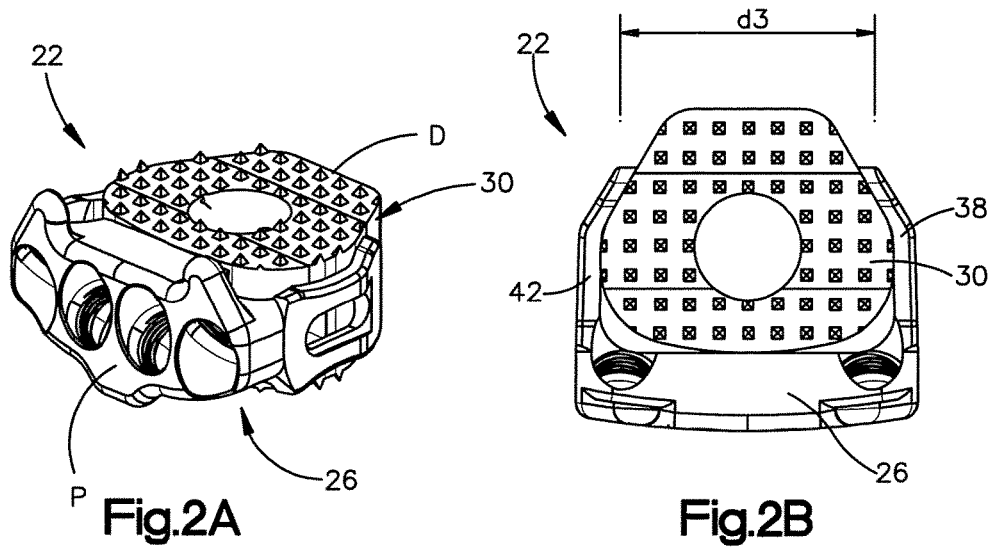


Fig.1C



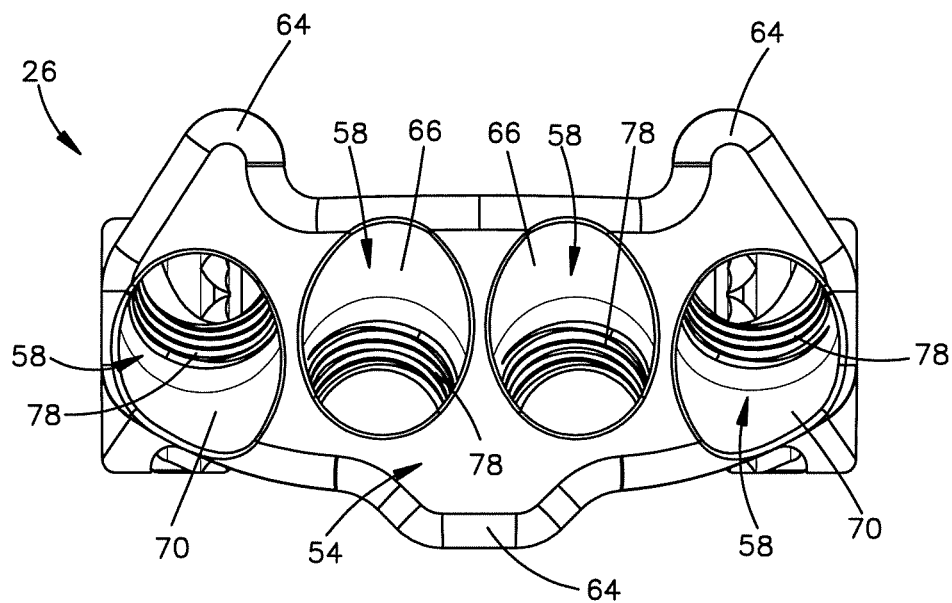


Fig.3B

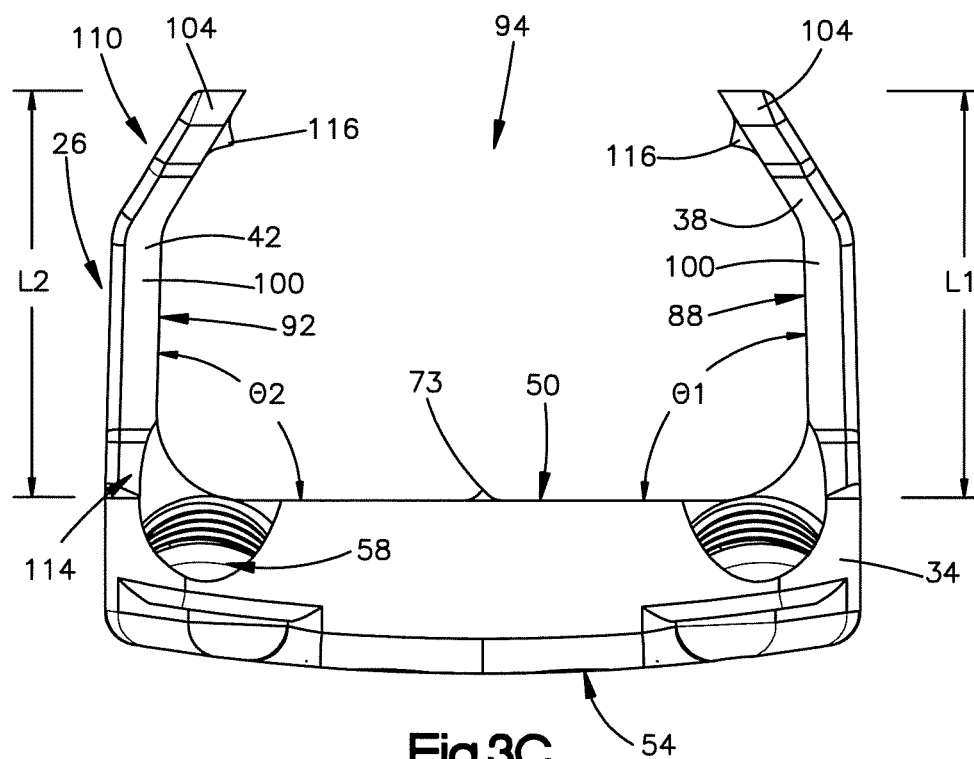


Fig.3C

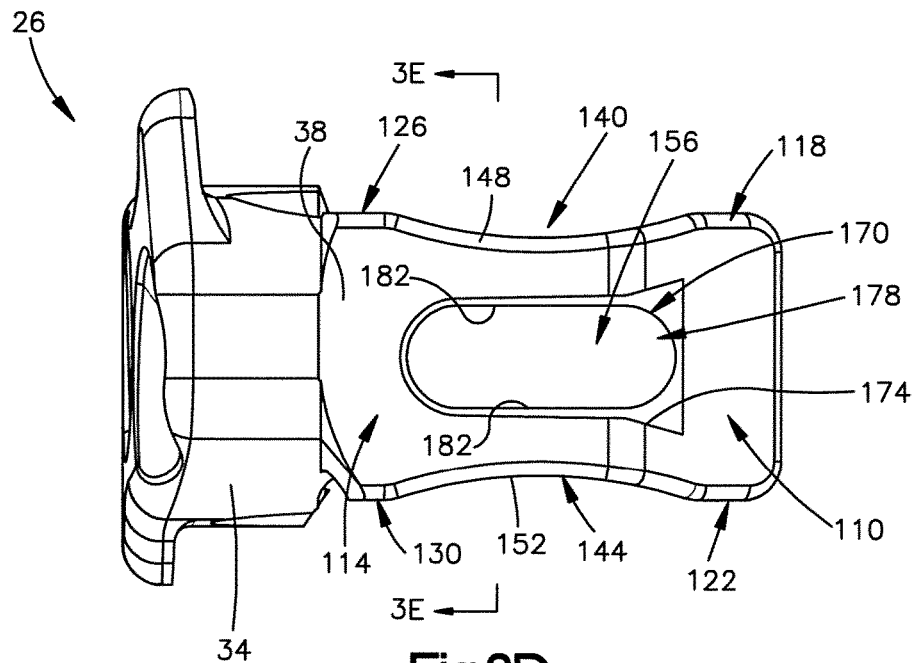


Fig.3D

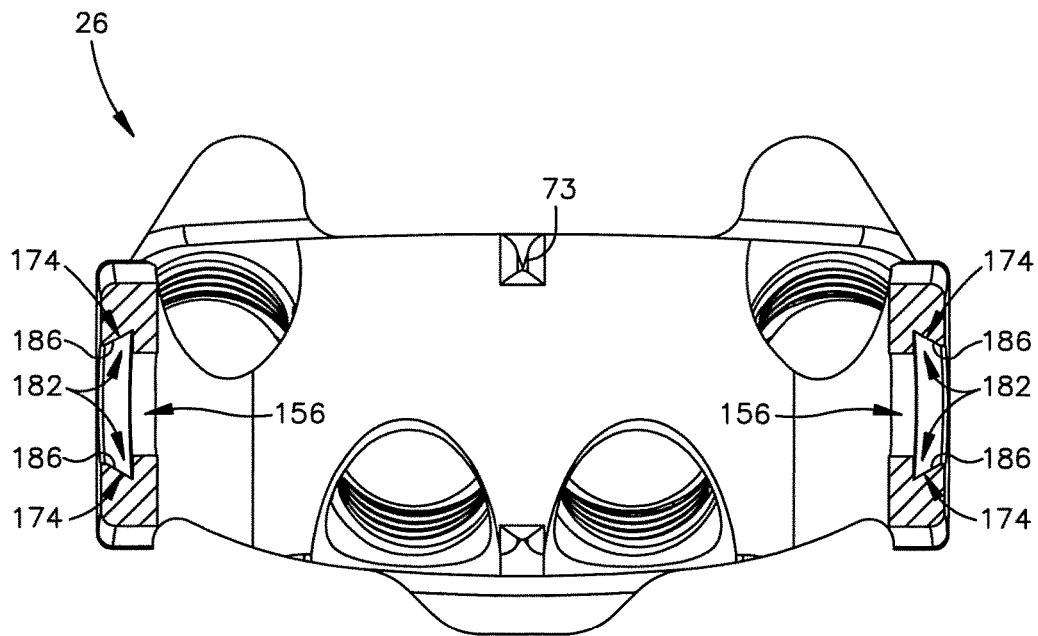


Fig.3E

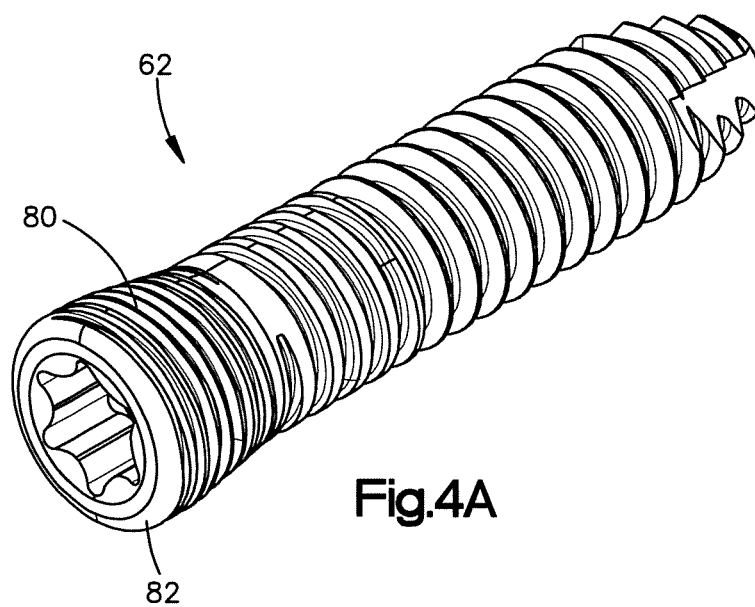


Fig.4A

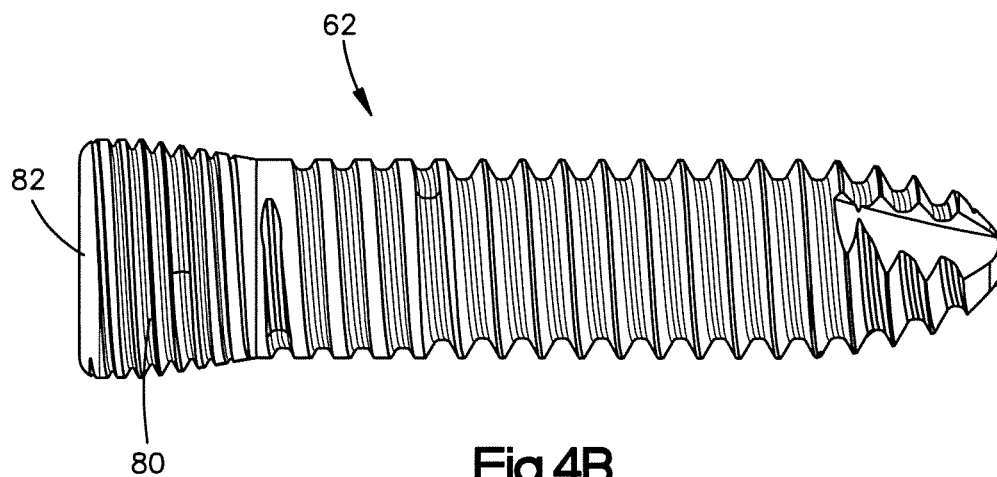


Fig.4B

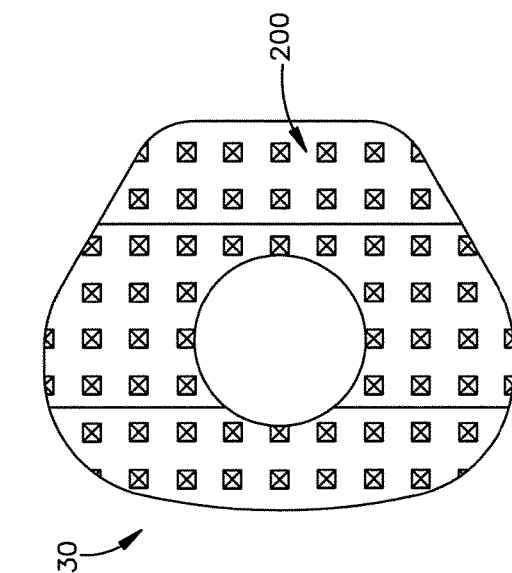


Fig. 5A

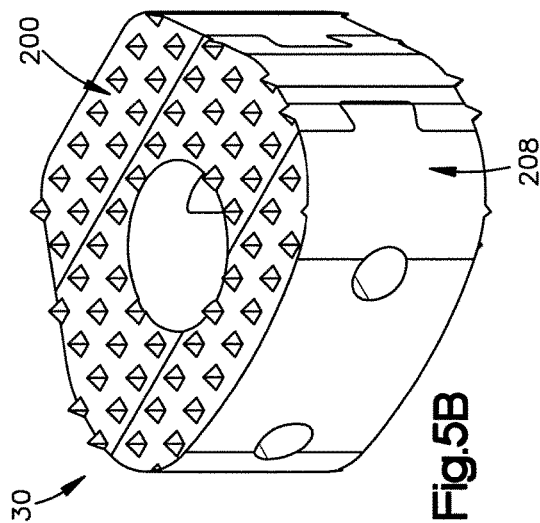


Fig. 5B

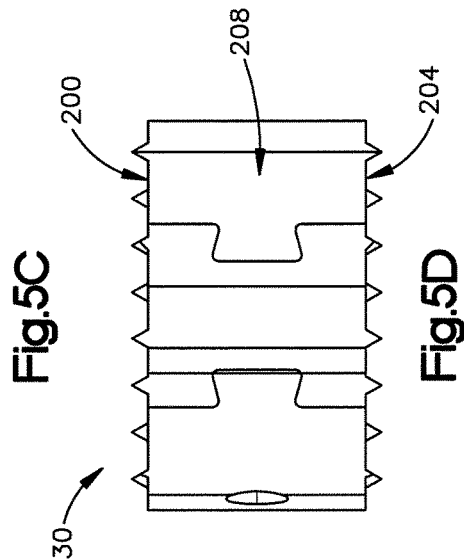


Fig. 5C

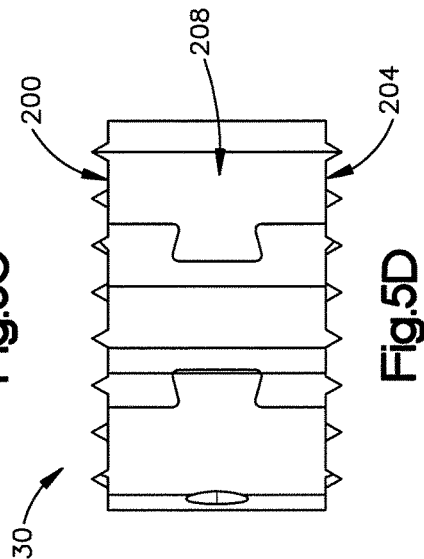
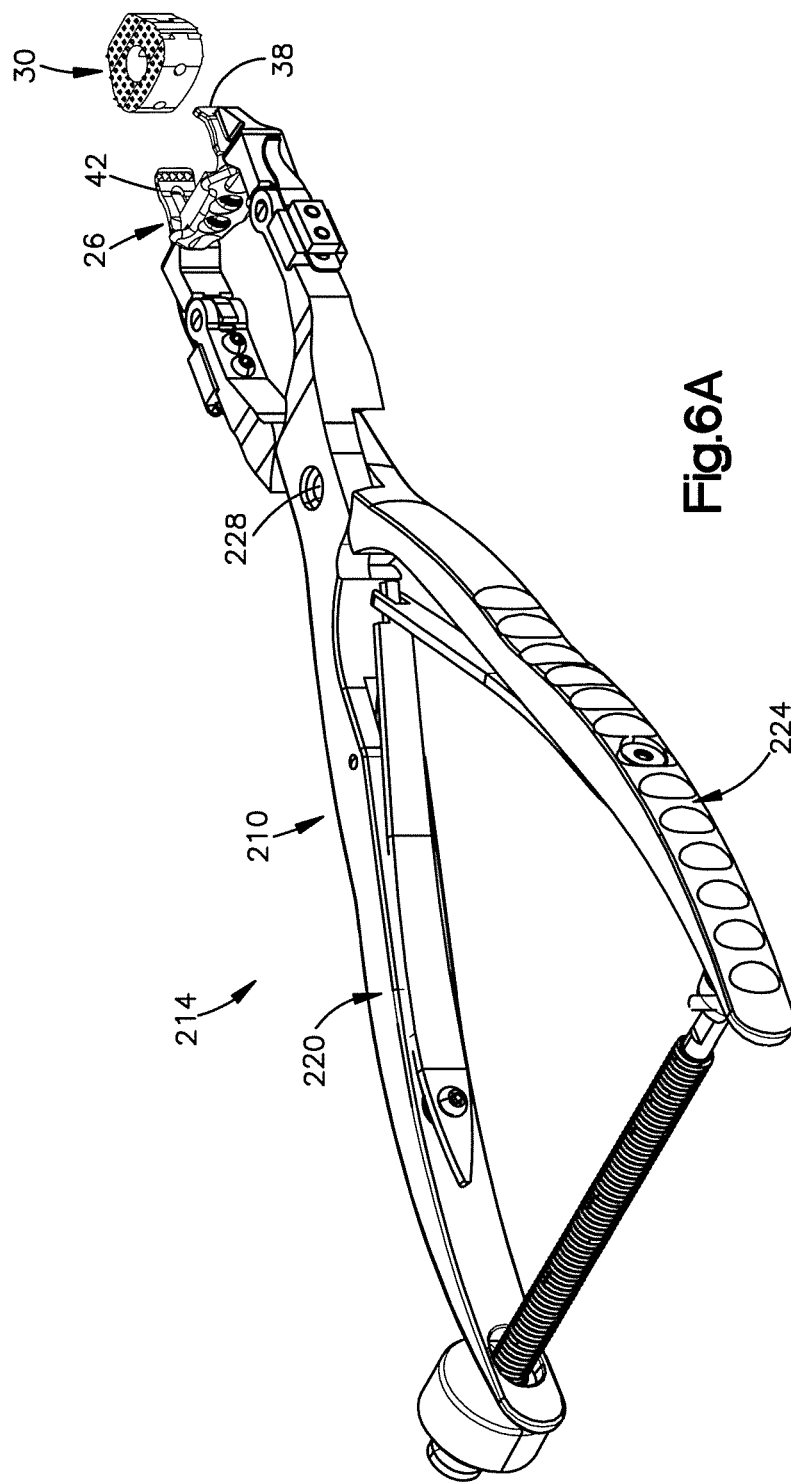
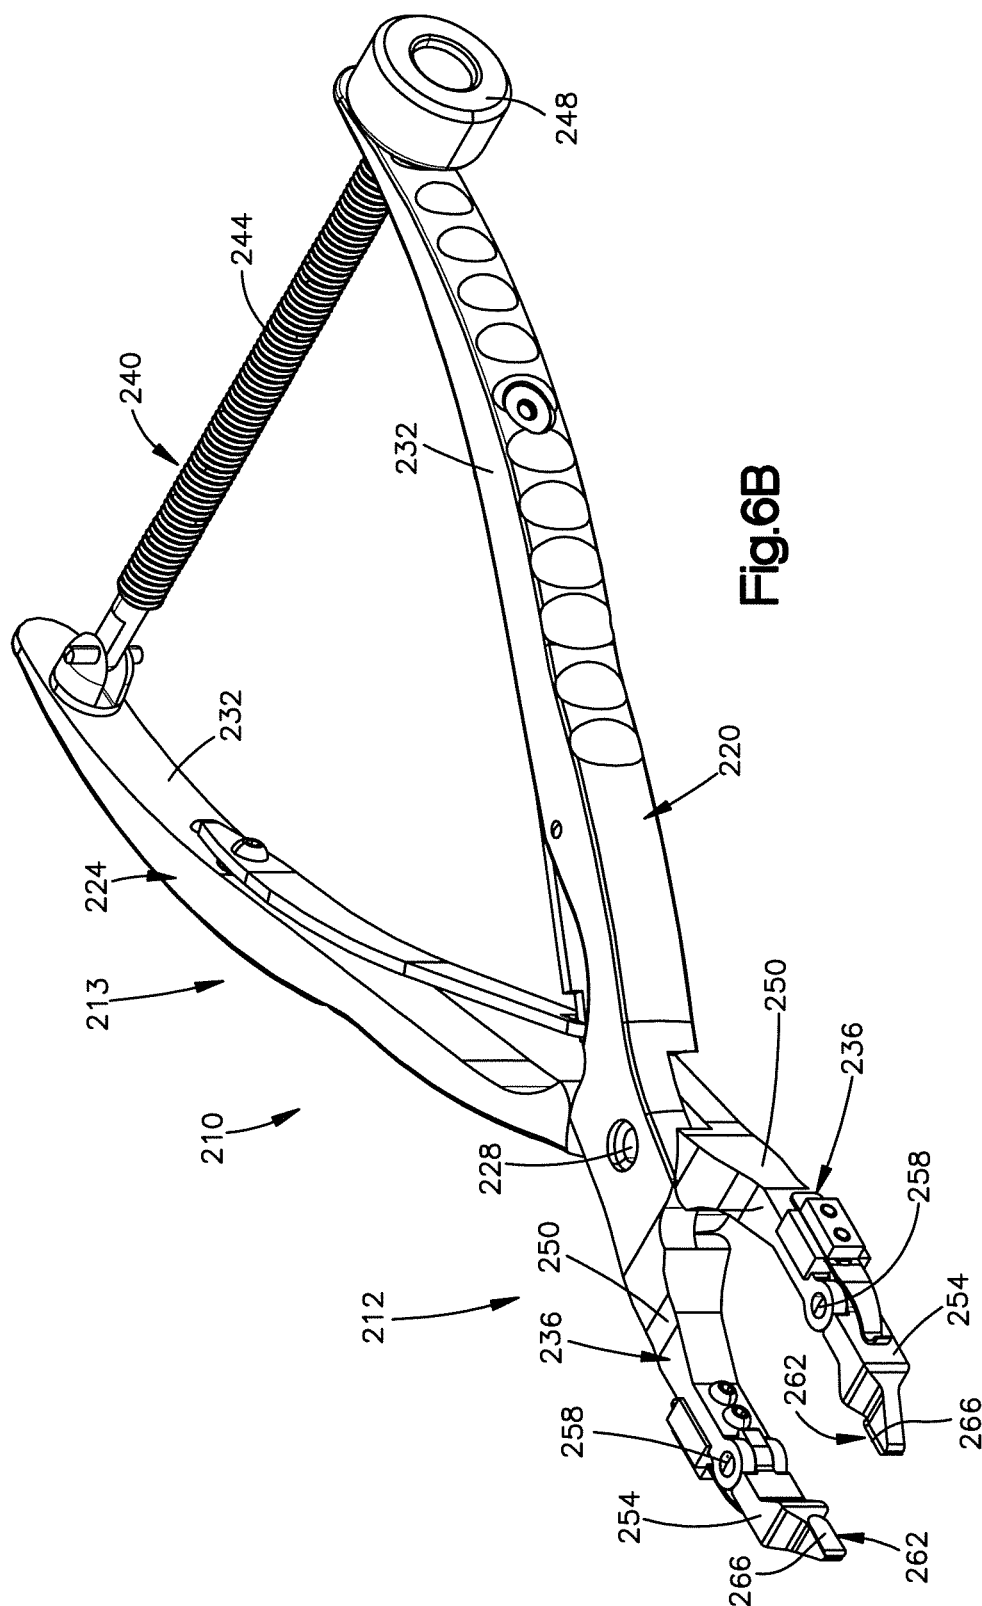
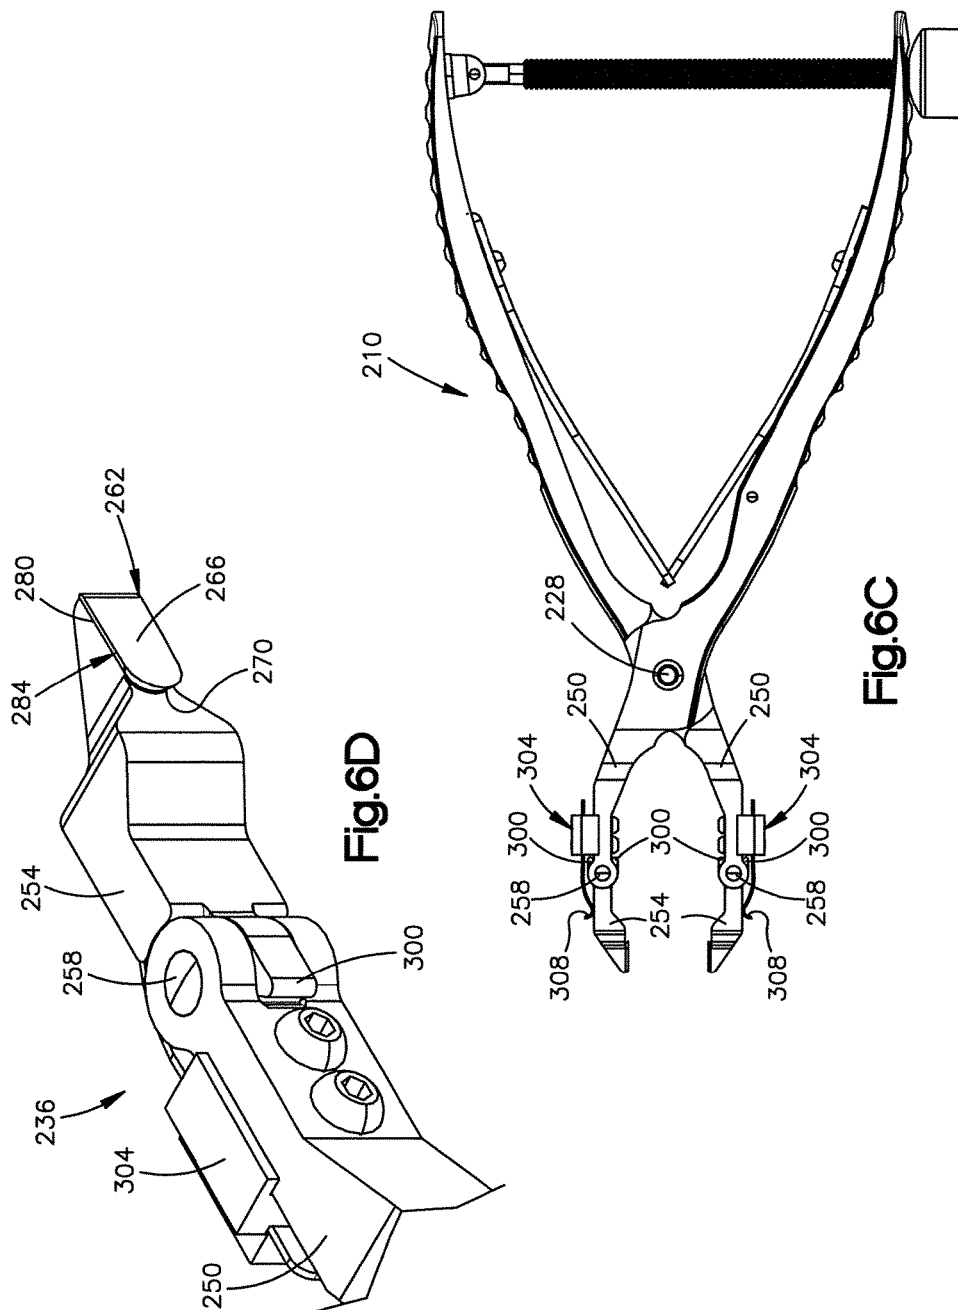


Fig. 5D







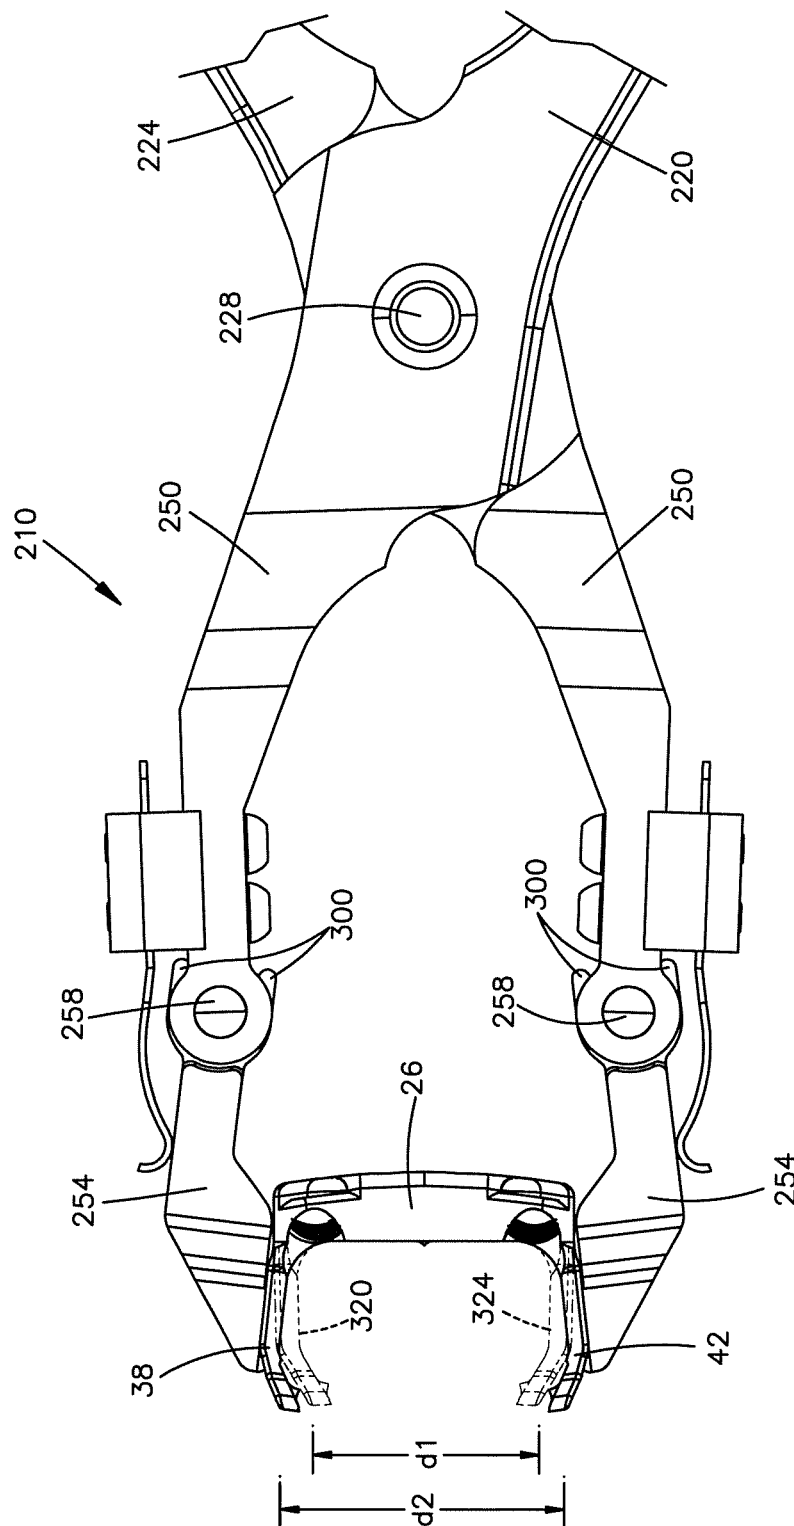


Fig. 6E

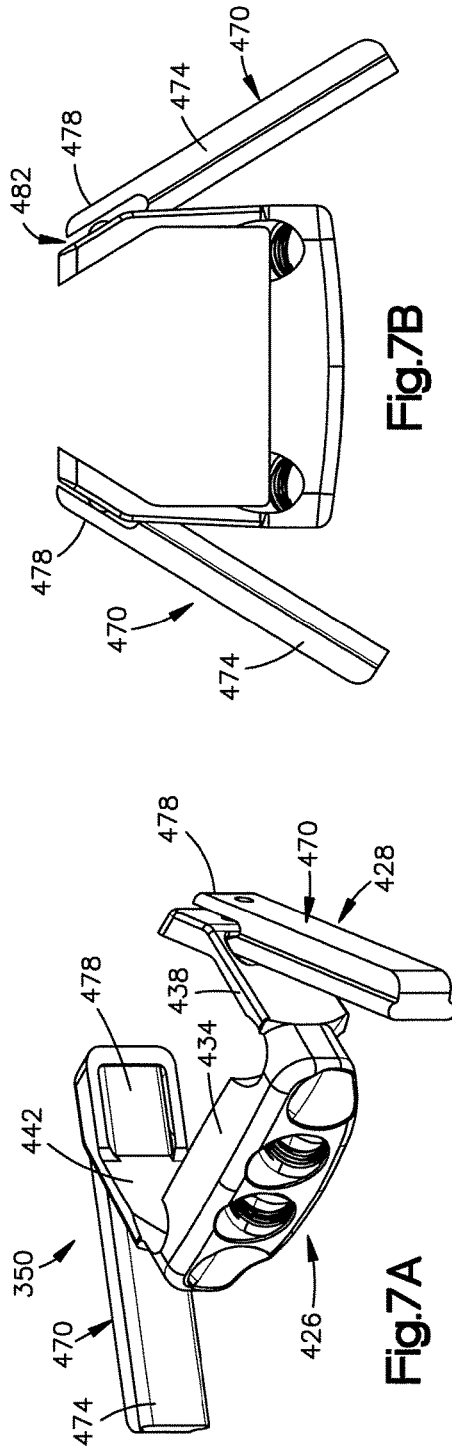


Fig.7B

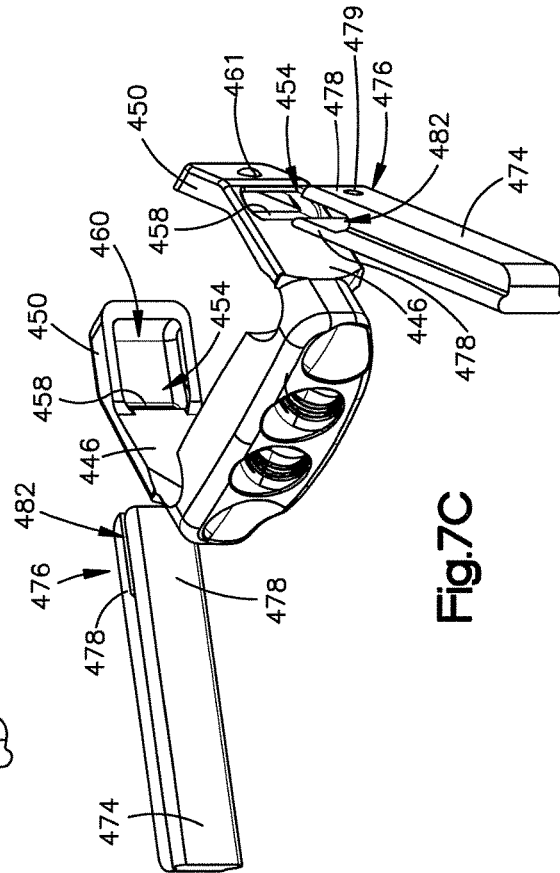
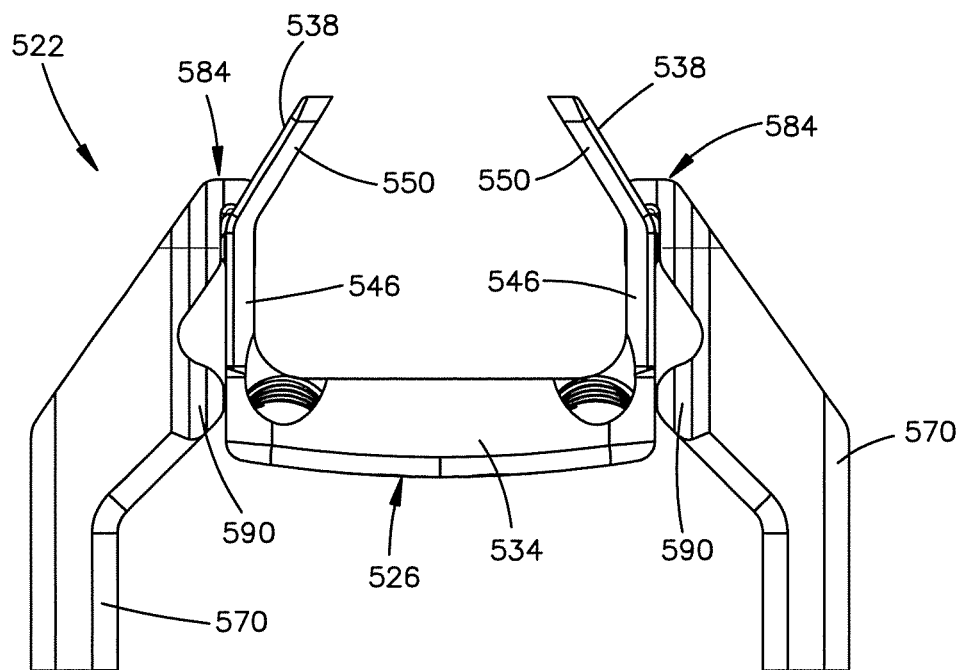
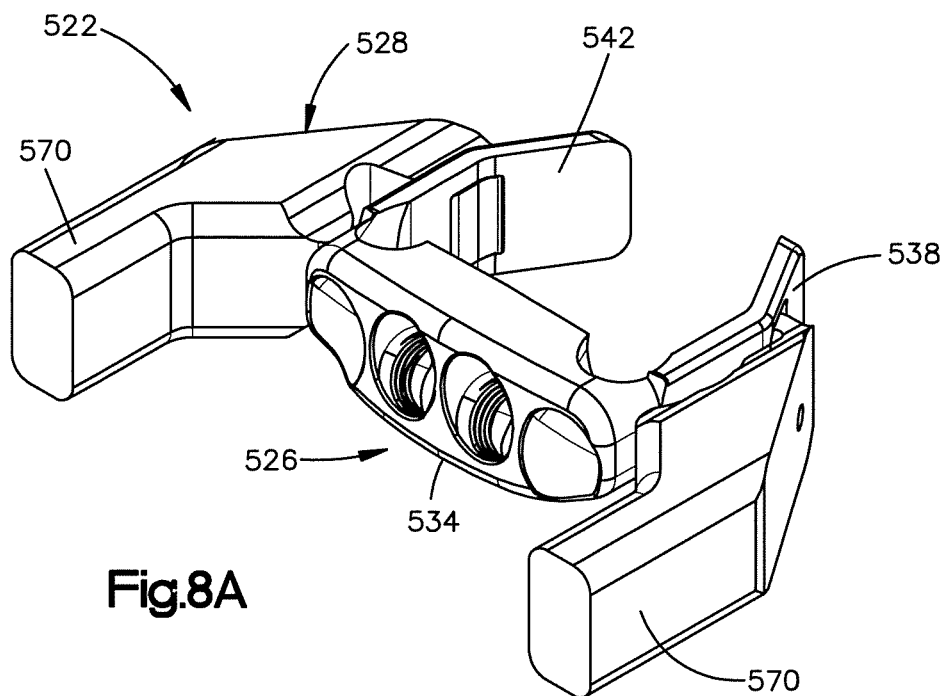


Fig.7C



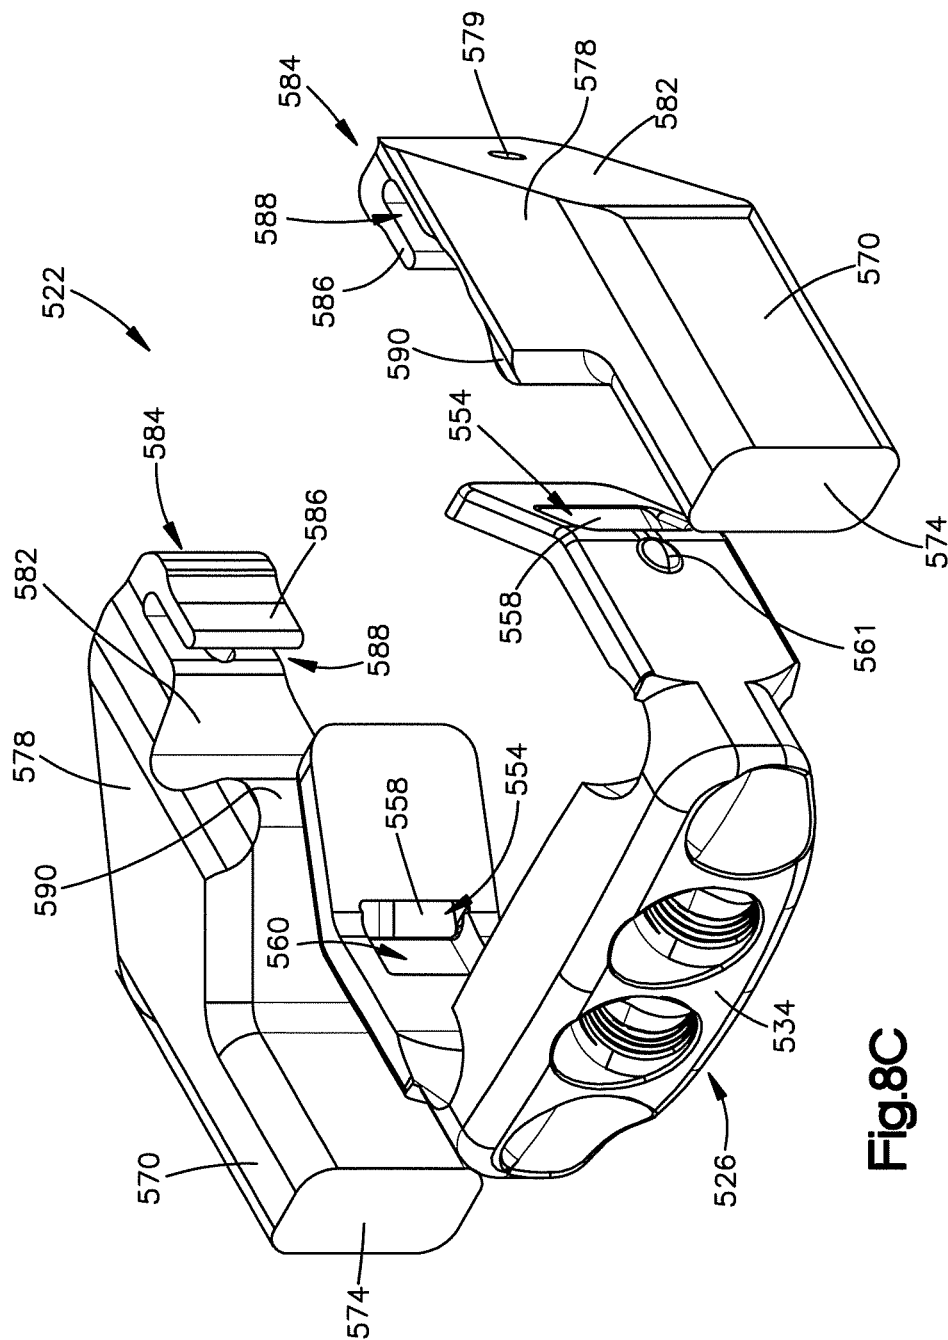
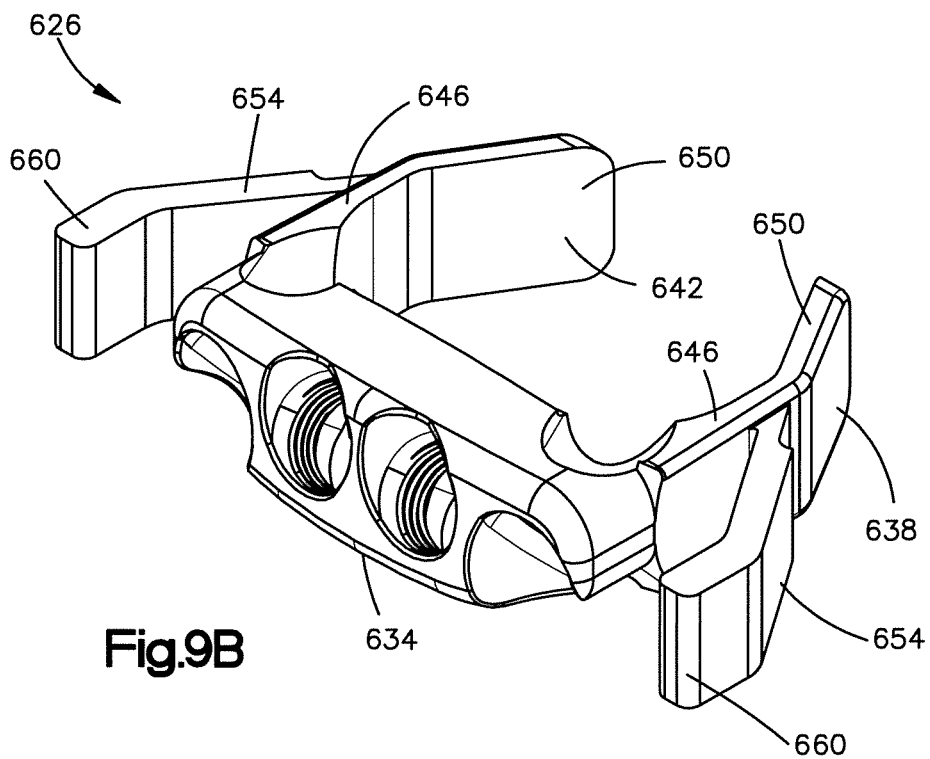
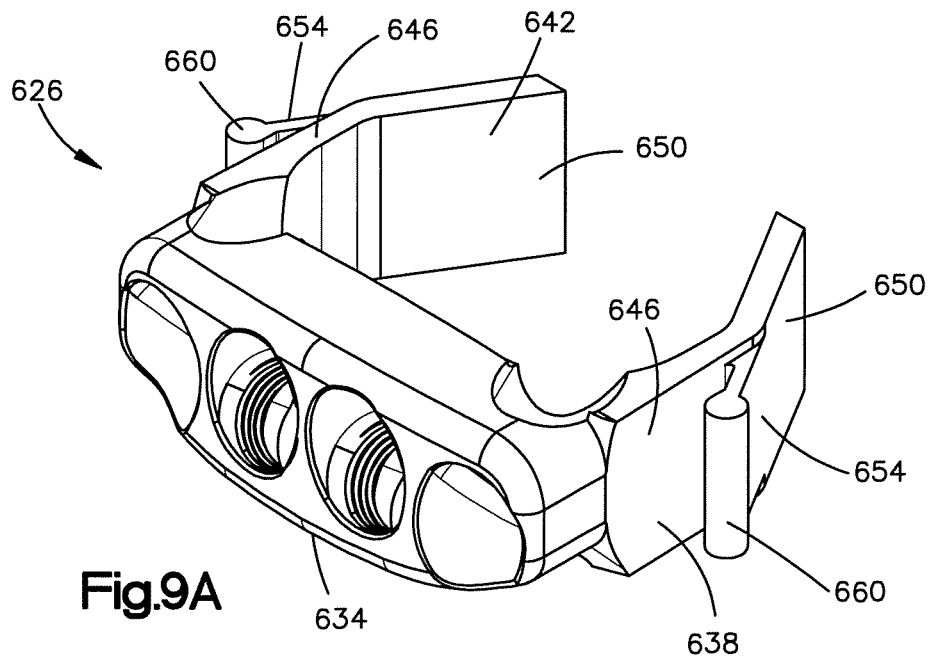
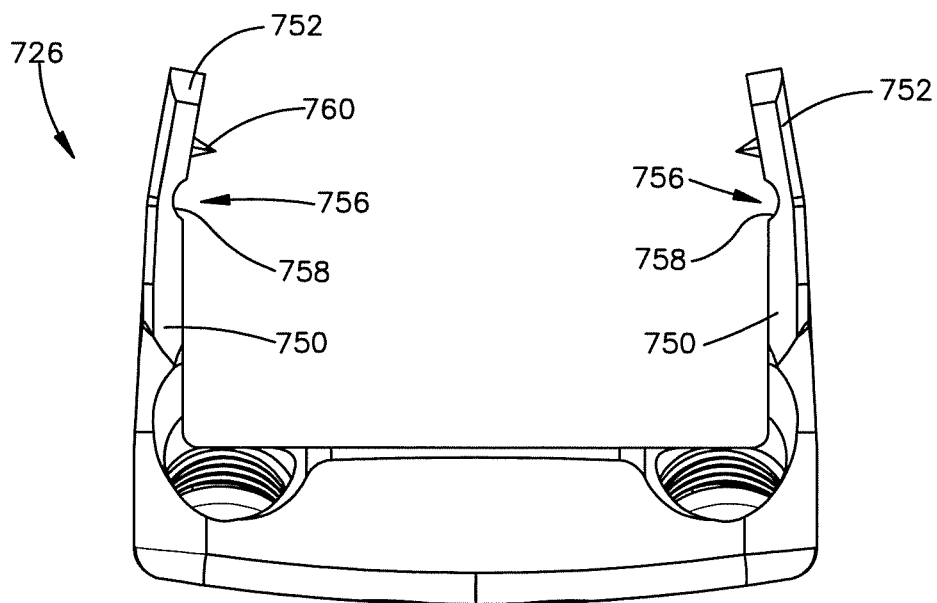
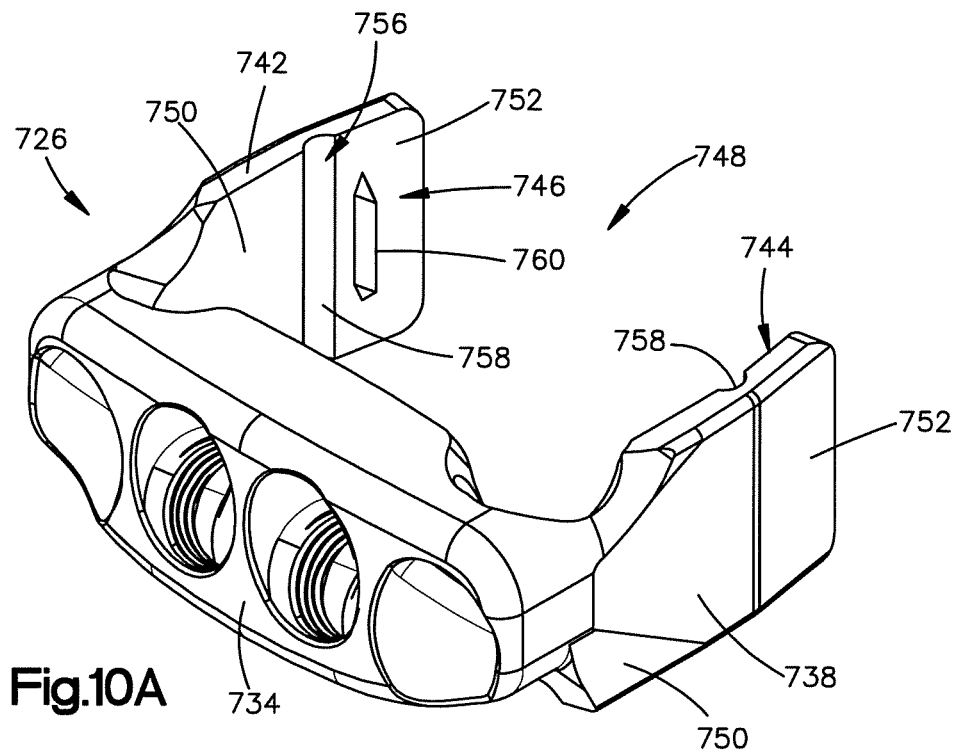
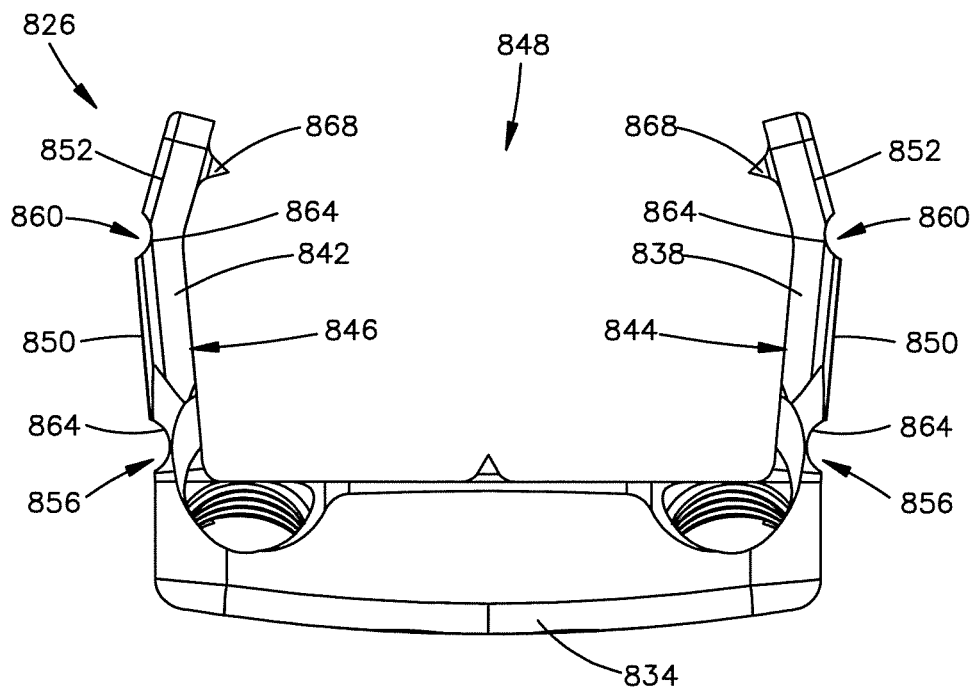
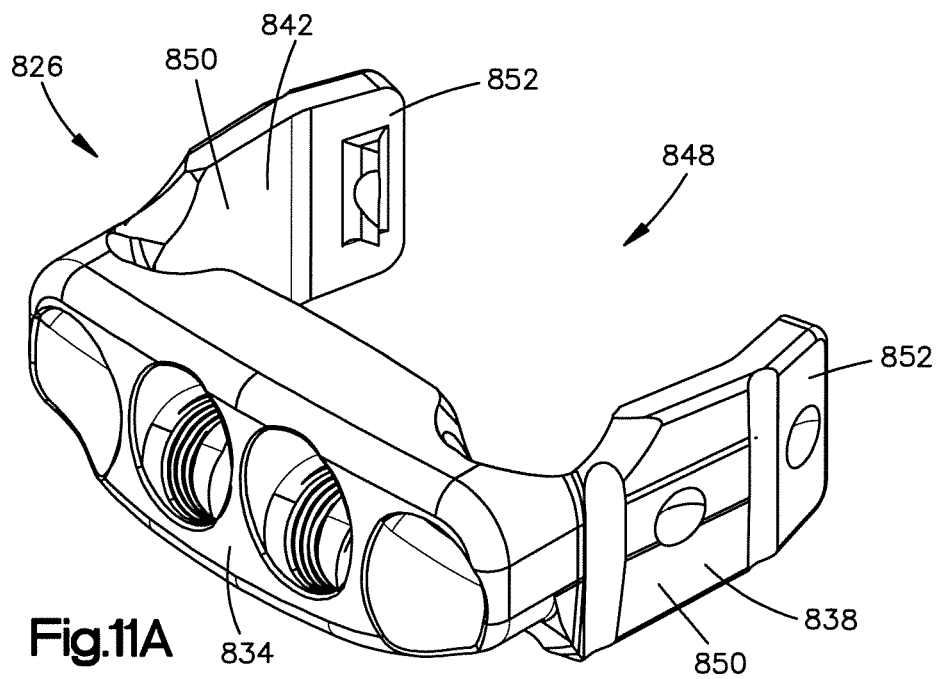
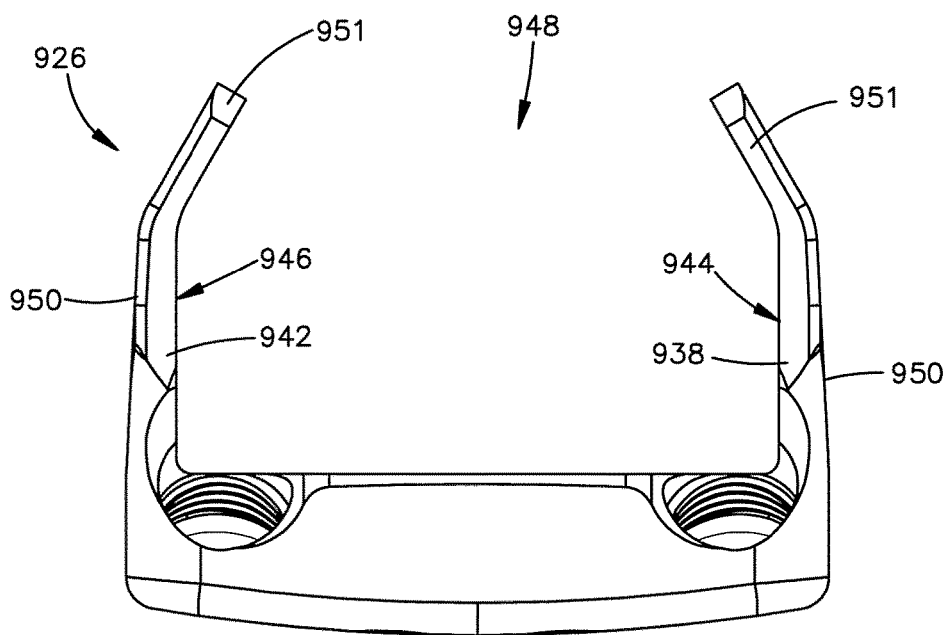
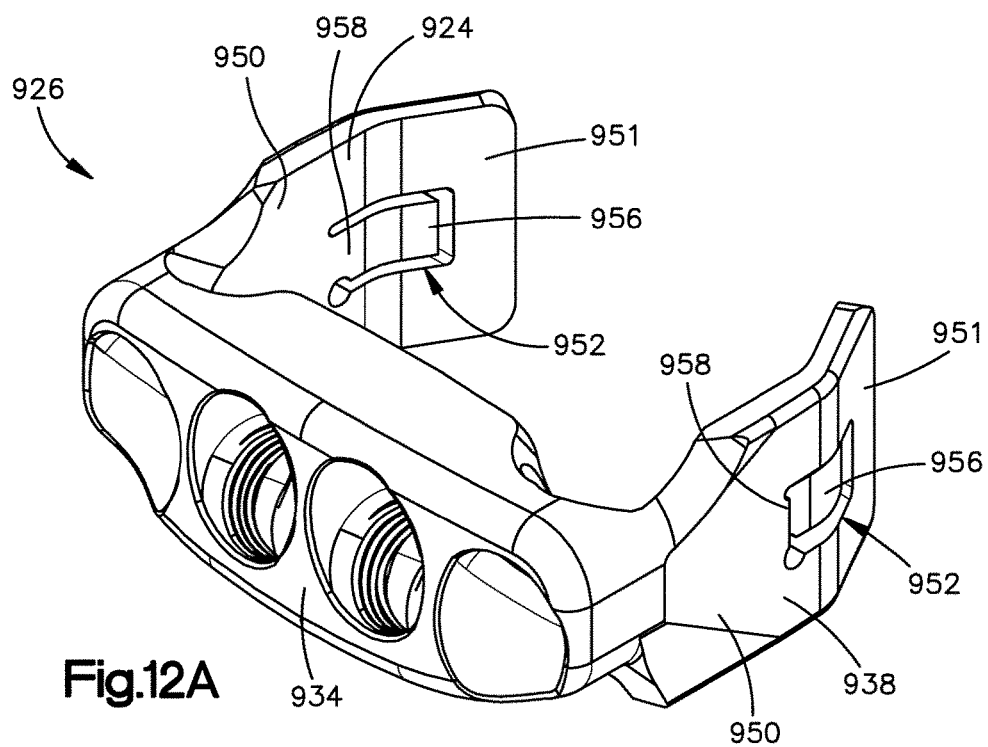




Fig. 8C










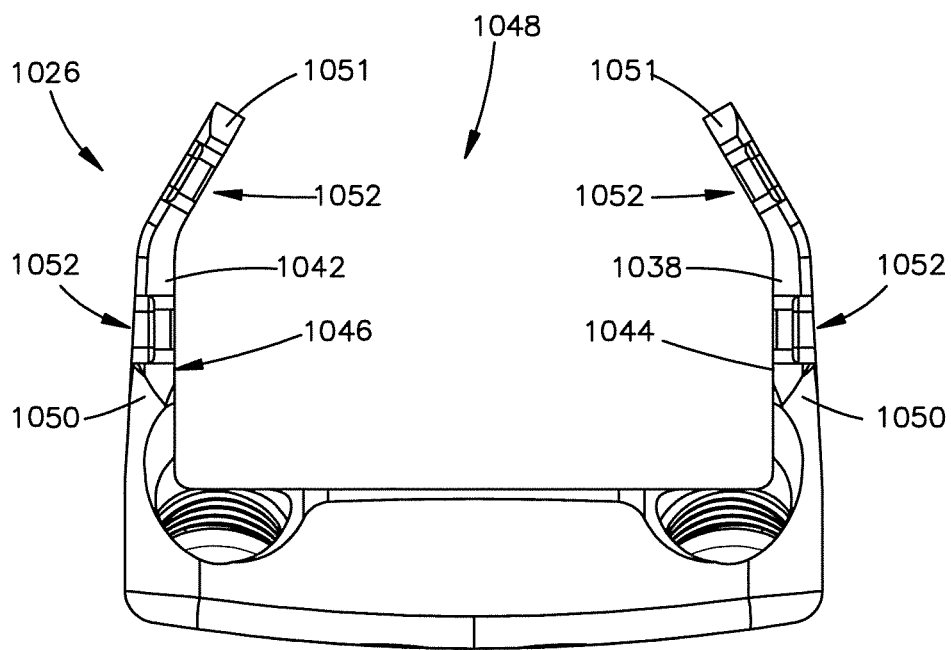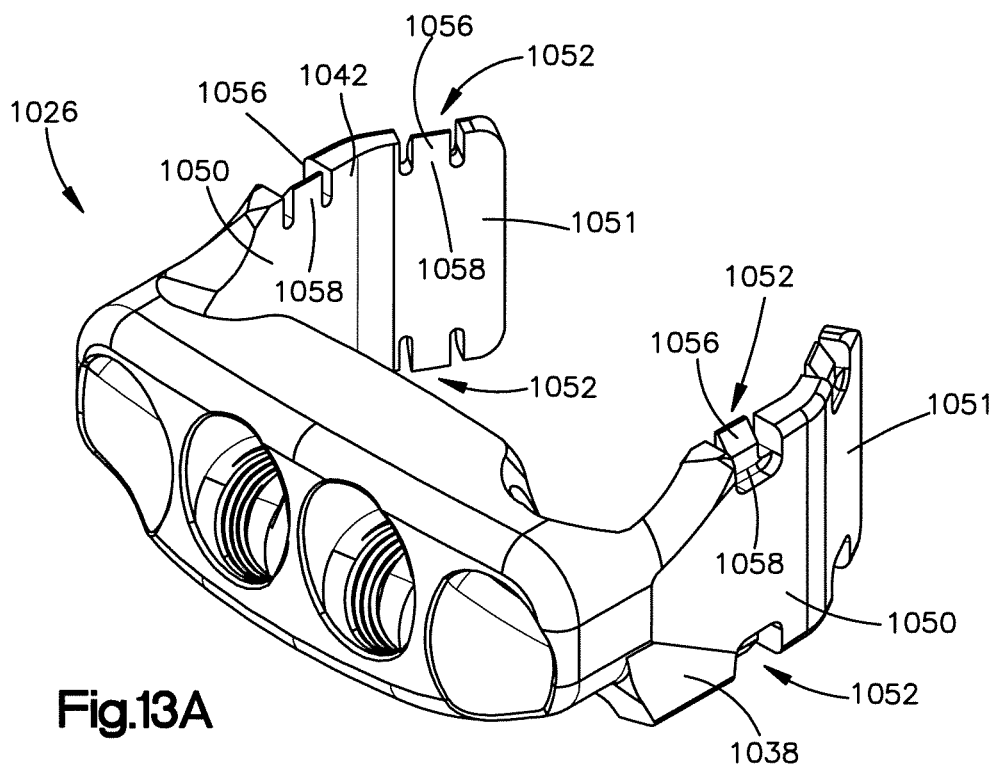

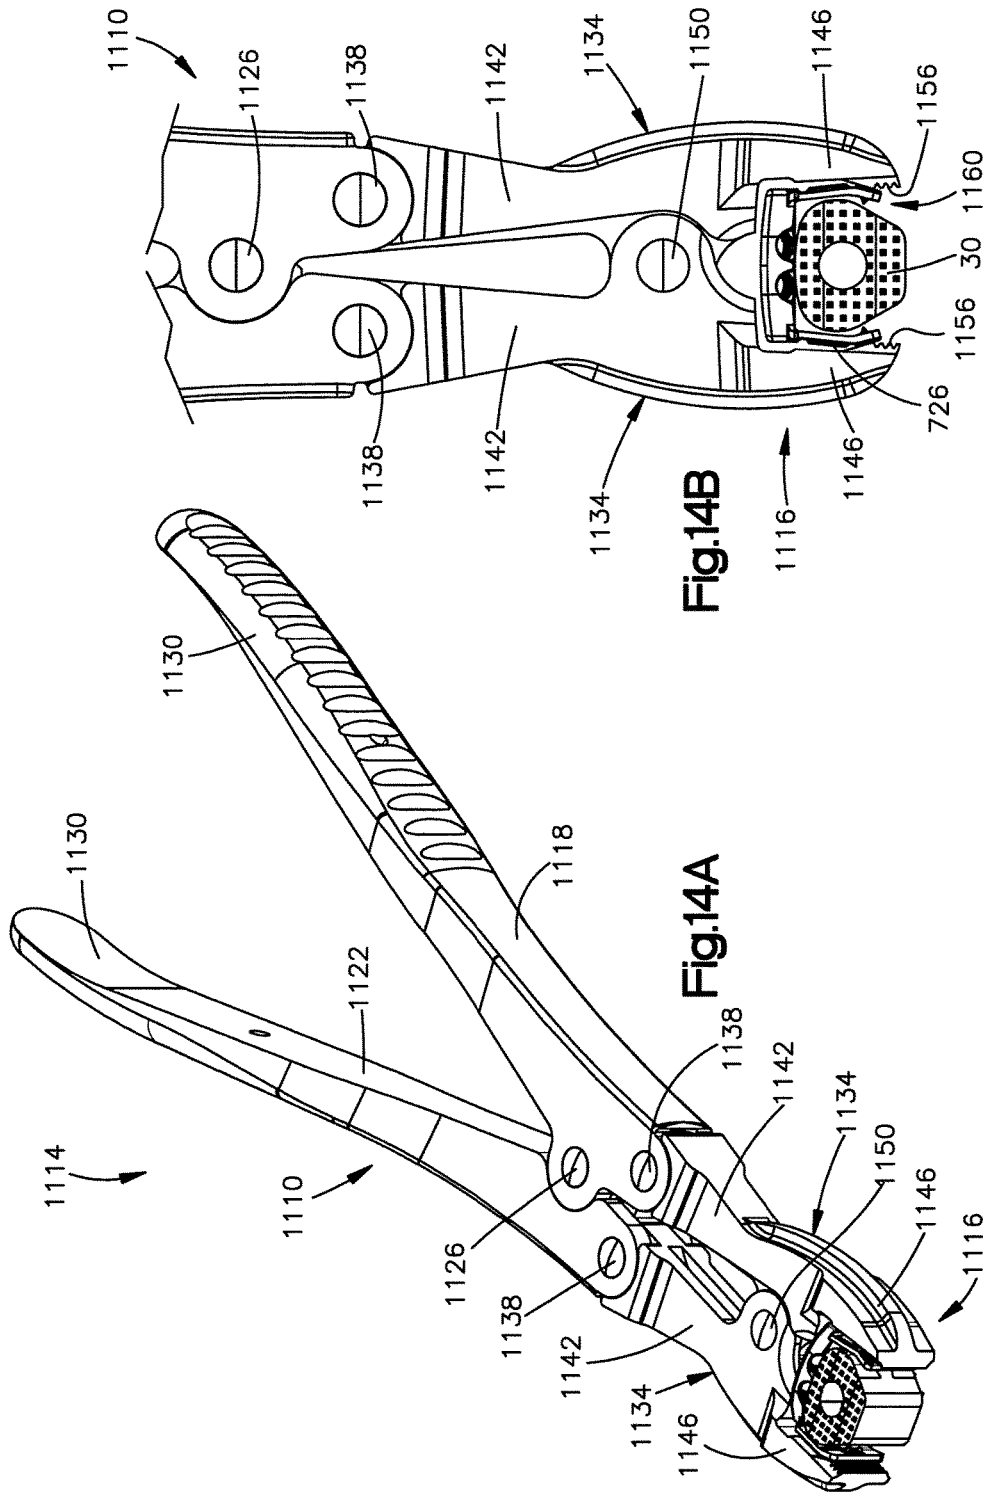

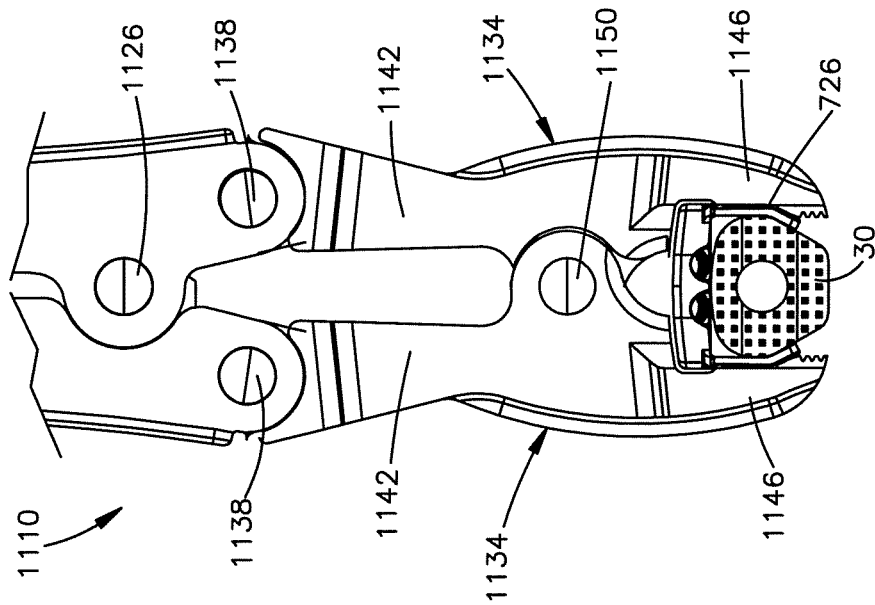


Fig.14C

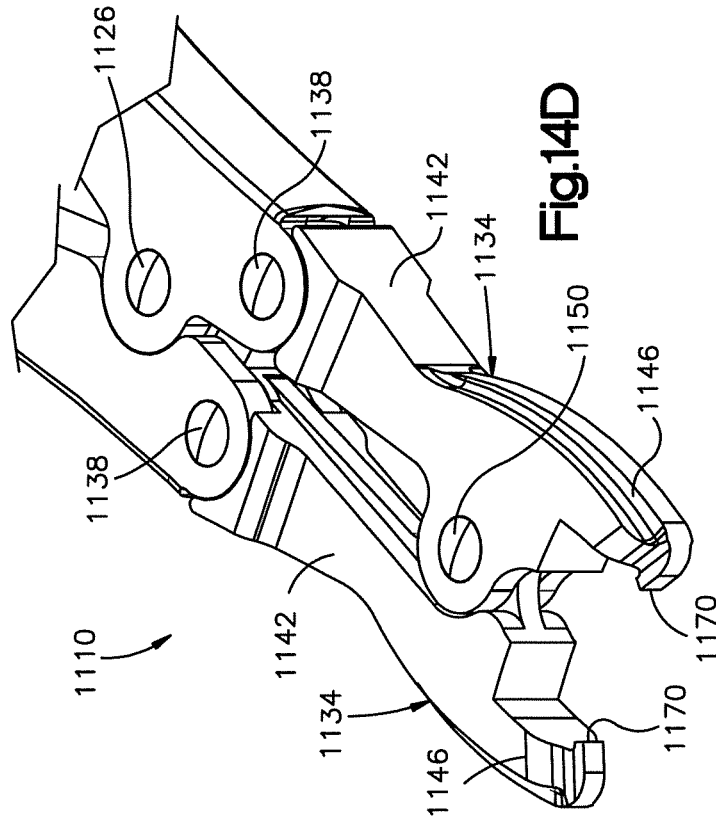
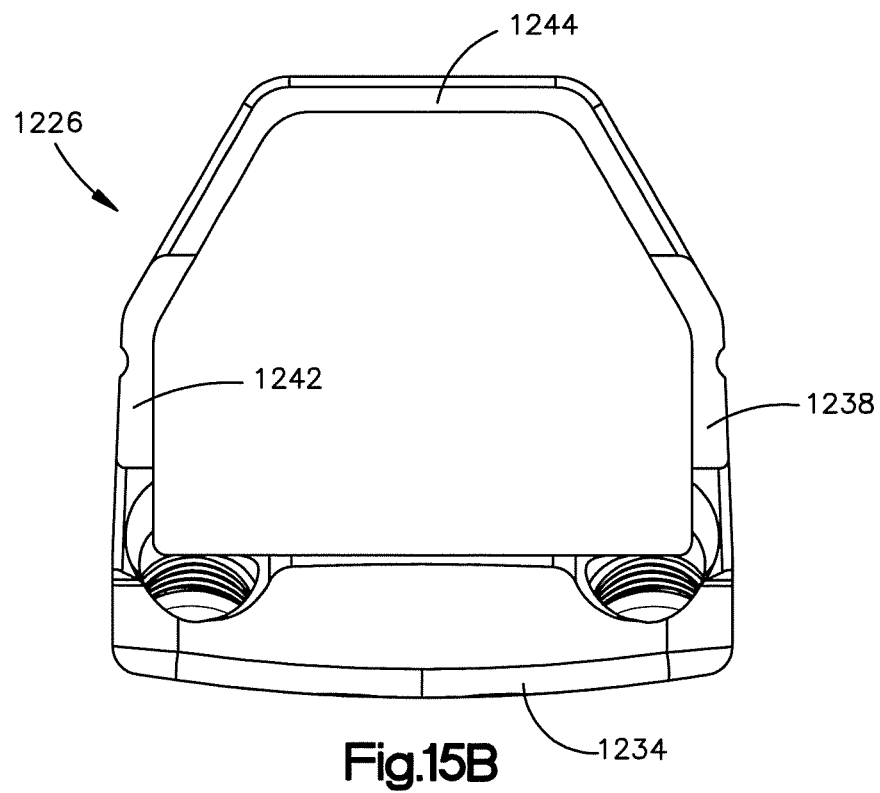
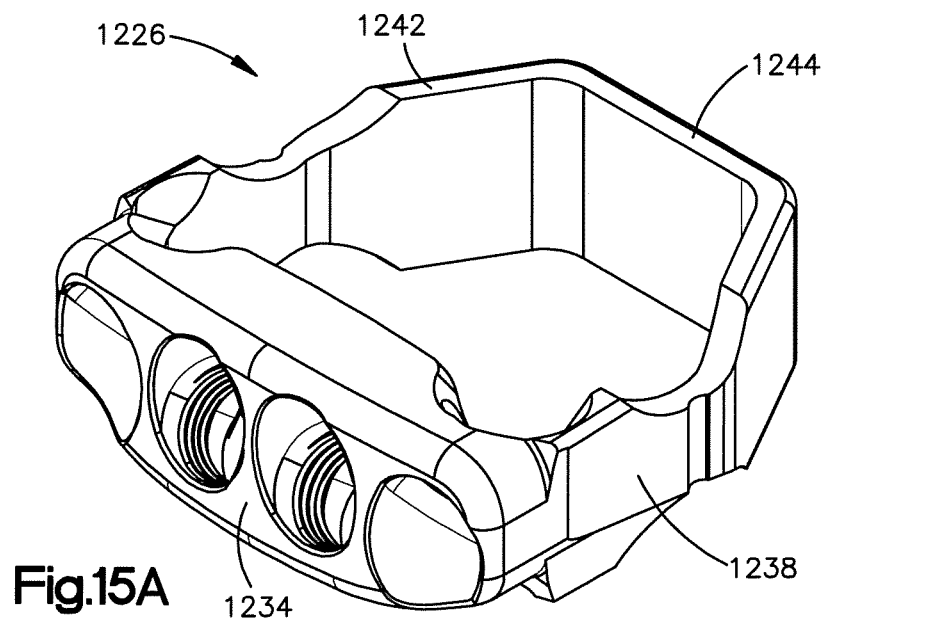
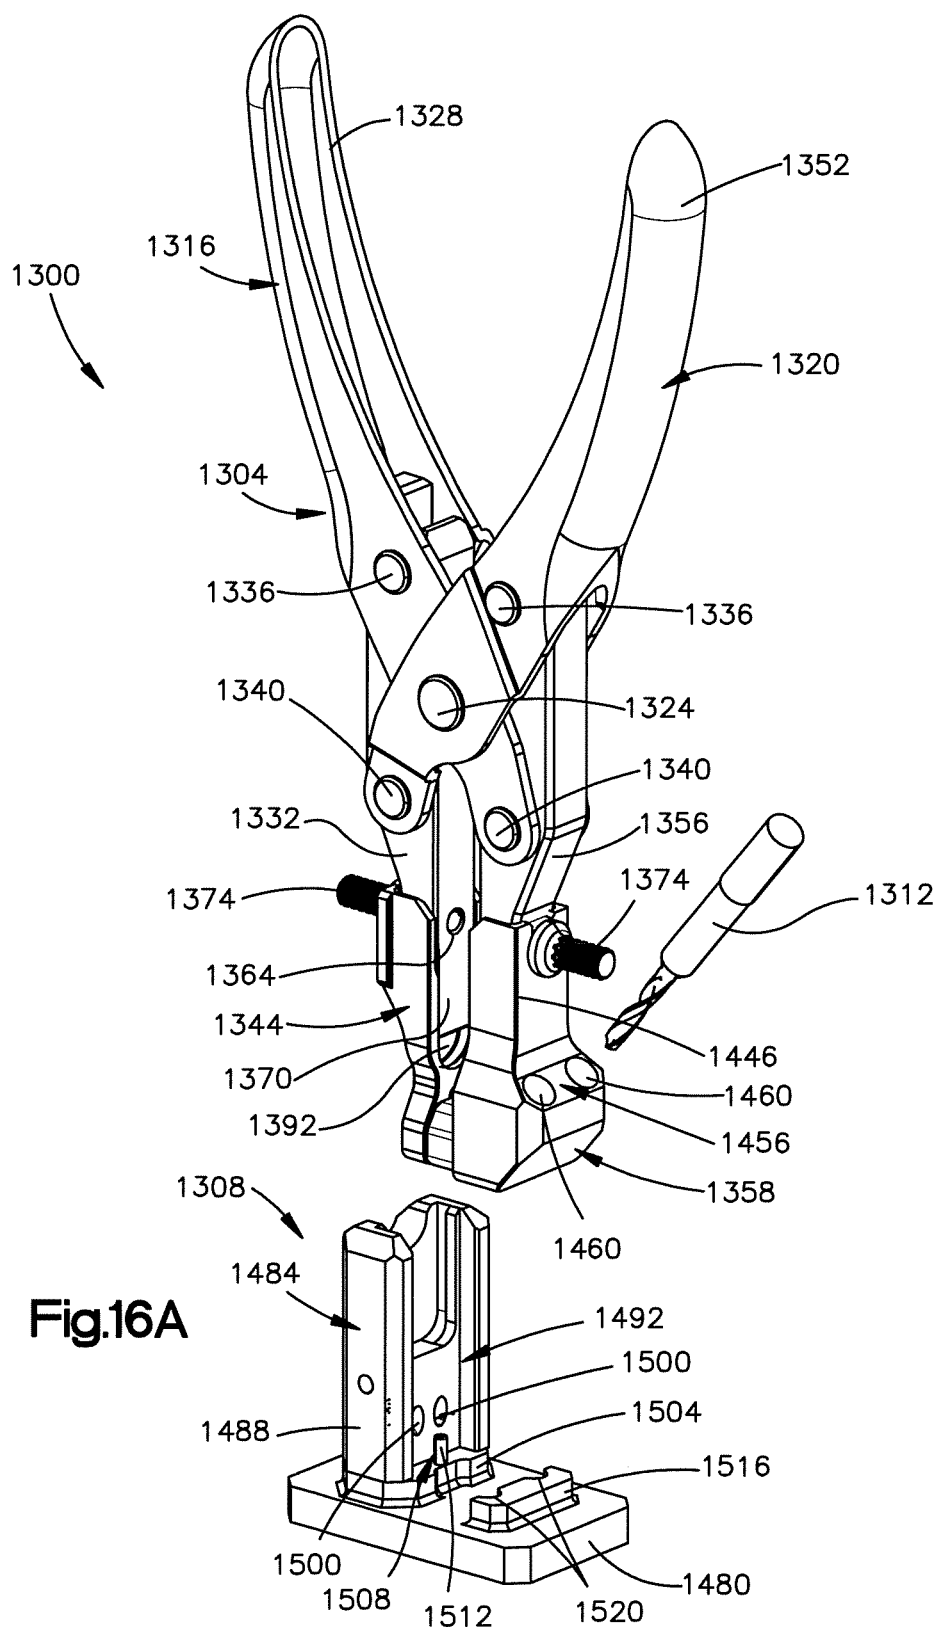
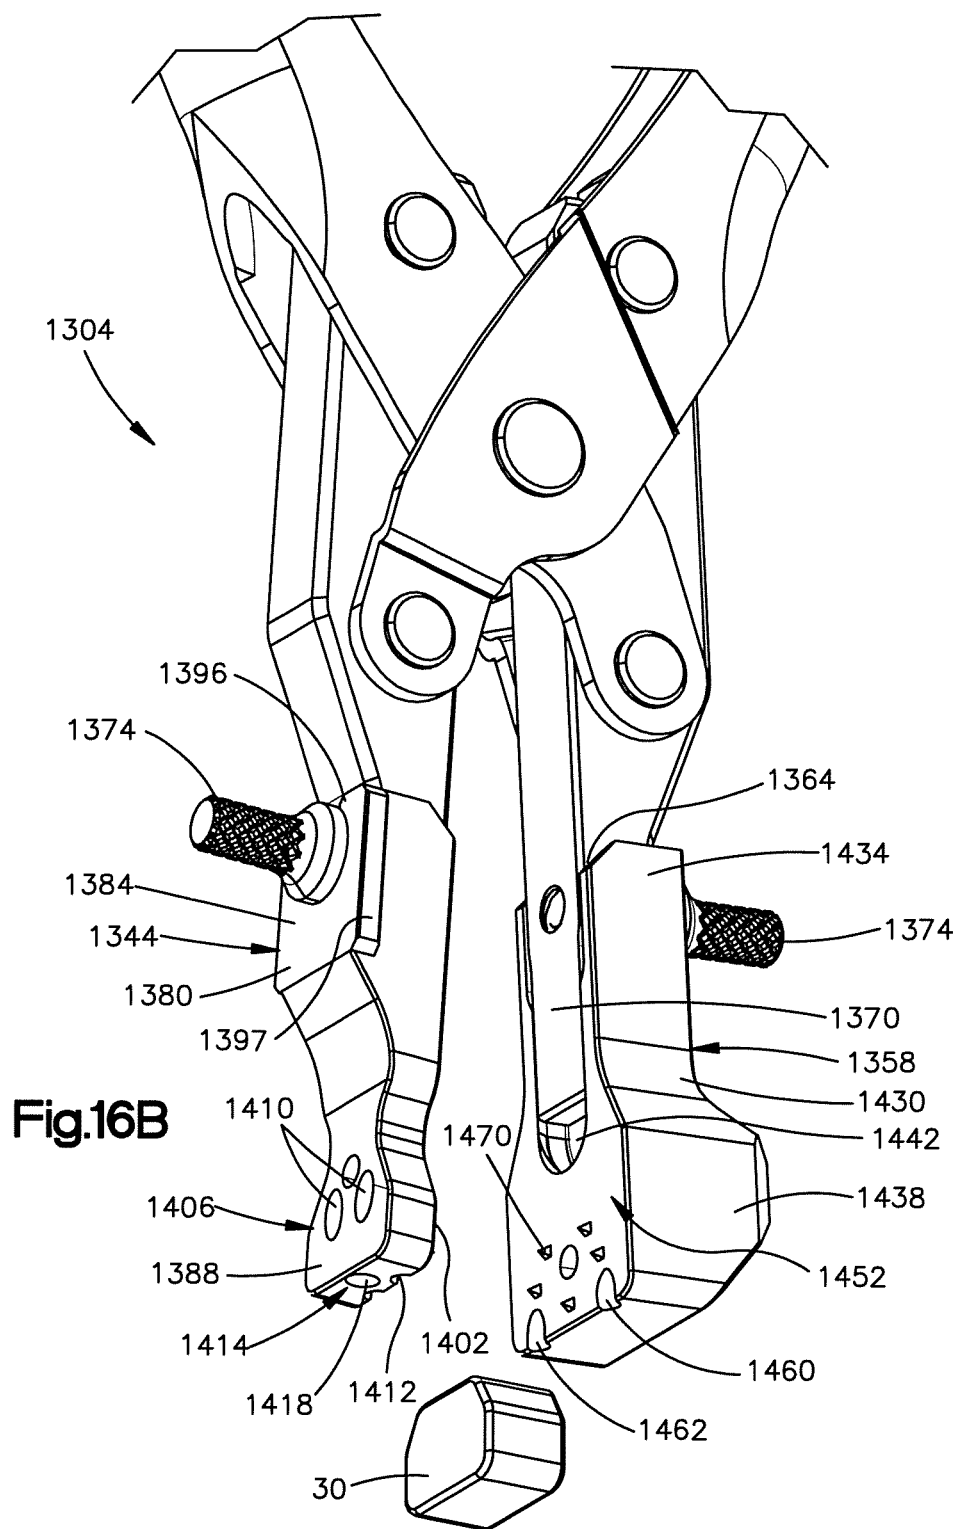


Fig.14D







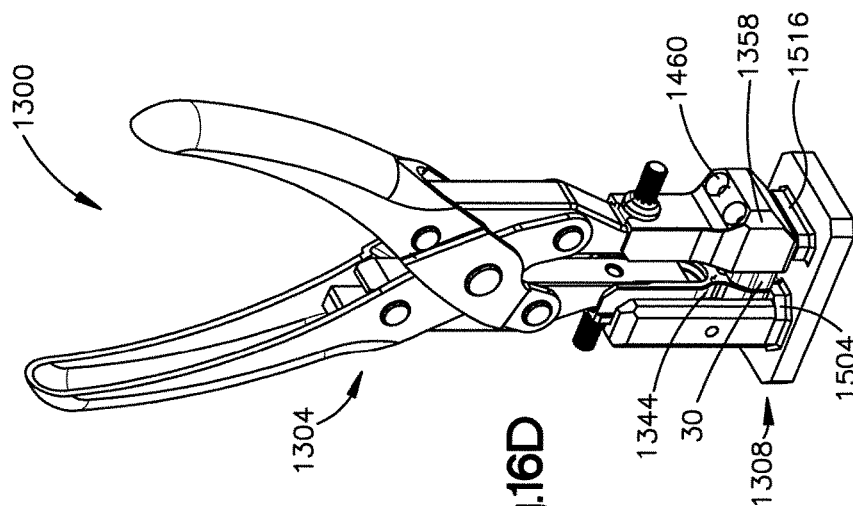


Fig. 16D



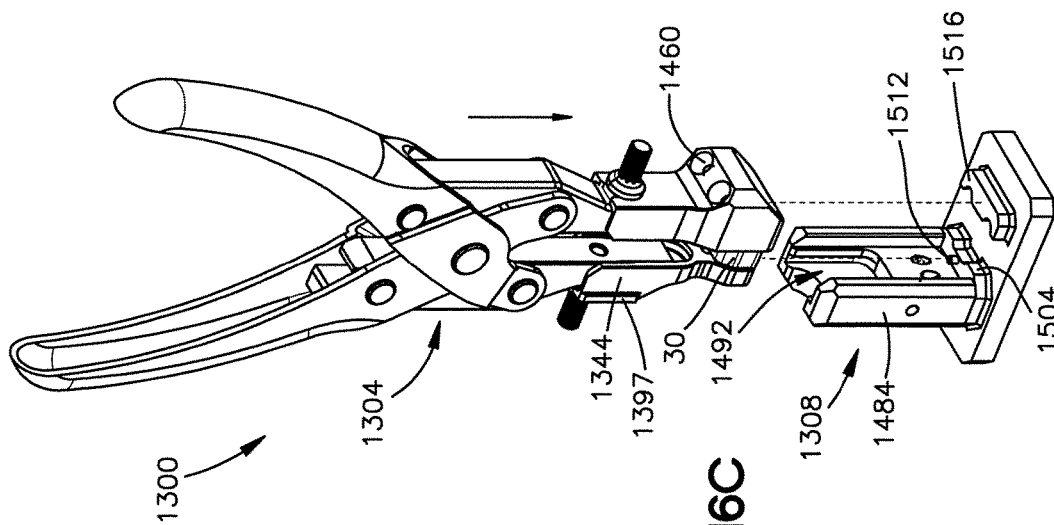


Fig. 16C

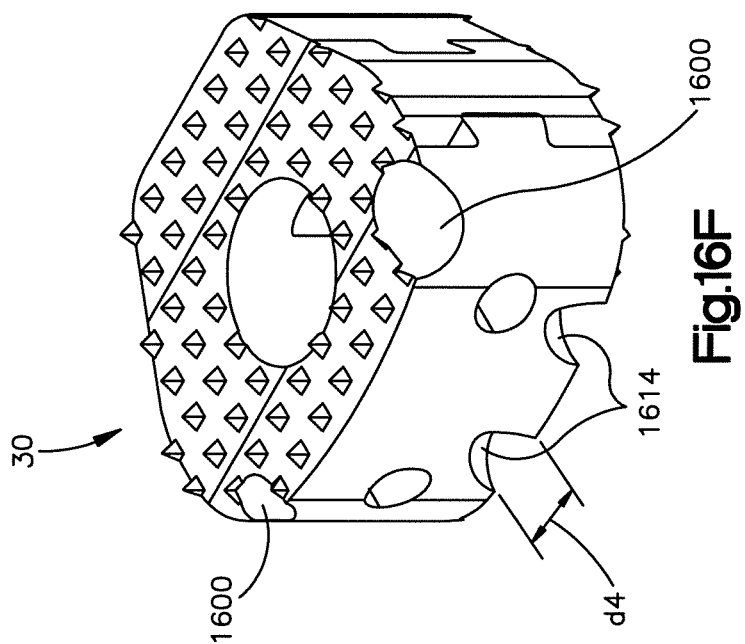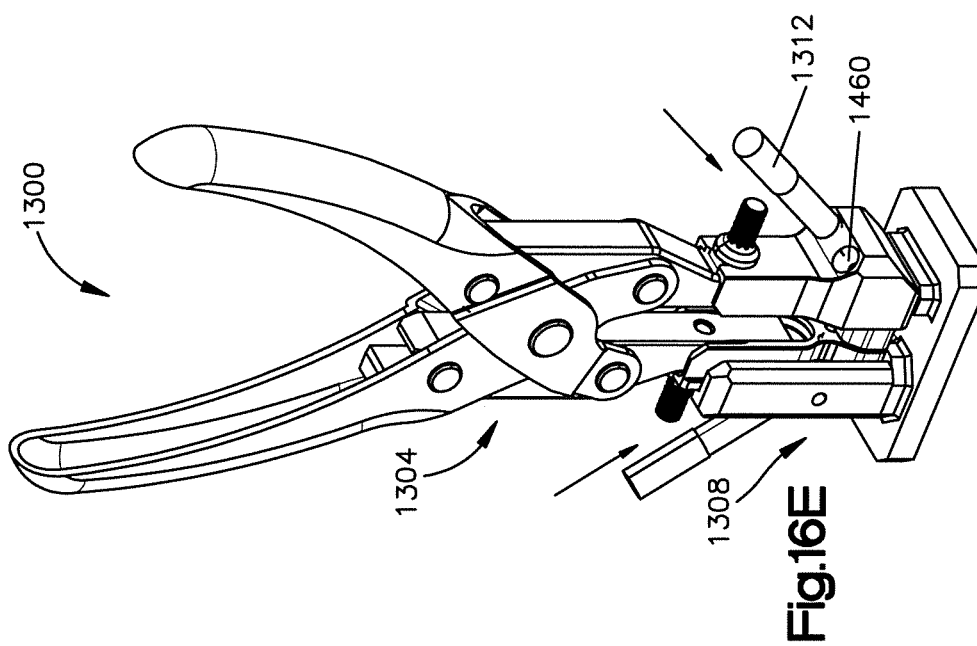

INTERVERTEBRAL IMPLANTS, SYSTEMS, AND METHODS OF USE

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 14/954,412 filed Nov. 30, 2015, which is a continuation of U.S. patent application Ser. No. 13/333,065 filed Dec. 21, 2011, now U.S. Pat. No. 9,220,604 issued Dec. 29, 2015, which claims the benefit of U.S. Provisional Patent Application Ser. No. 61/425,509 filed Dec. 21, 2010 and U.S. Provisional Patent Application Ser. No. 61/425,505 filed Dec. 21, 2010, the contents of each of which are hereby incorporated by reference in their entireties herein.

BACKGROUND

Implants for spinal fusion typically include a spacer body to allow for growth of bone between adjacent vertebral bodies while restoring and maintaining intervertebral space height that is defined between the vertebral bodies. In some cases, a plate is used to provide stability during healing so as to allow the patient to quickly resume an active lifestyle. The profile of the plate, which is placed on the anterior aspect of the vertebral bodies, however, can lead to dysphasia or patient discomfort which has resulted in various “zero-profile” devices currently being developed. For example, one zero profile device is an intervertebral device that is inserted into the intervertebral space. While the threaded device provides graft retention, stability in flexion and extension is questionable since the device does not positively lock to the vertebral bodies during implantation.

Other intervertebral implants have been utilized that include a frame shaped in a manner so as to hold a spacer body made from PEEK. Such spacer bodies typically are customized to have complimentary features to the frame so that the spacer bodies may be affixed to the frame. Such frames may not be desirable for spacer bodies made from allograft, however, because allograft spacer bodies may vary in shape, may not include the complimentary features needed to be affixed to the frame, and may degrade or resorb overtime.

SUMMARY

In accordance with an embodiment, an intervertebral implant frame can be configured to retain a spacer body. The frame can include a support member, a first arm that extends from the support member, and a second arm that extends from the support member. The support member defines an inner surface, and at least two fixation element receiving apertures. Each of the fixation element receiving apertures is configured to receive a respective bone fixation element to thereby attach the intervertebral implant frame to first and second vertebral bodies, respectively when the intervertebral implant frame is disposed in an intervertebral space defined by first and second surfaces of the first and second vertebral bodies, respectively. The first arm includes a first inner spacer contacting surface, and defines a first terminal end. The second arm includes a second inner spacer contacting surface spaced from the first inner spacer contacting surface along a first direction. The second arm defines a second terminal end. The first and second terminal ends are each spaced from the support member along a second direction that is substantially perpendicular to the first direction so as to define first and second lengths, respectively. The first and

second inner spacer contacting surfaces define at least first and second respective contact locations, and at least one of the first and second arms is flexible so as to be movable between a first position, whereby the frame defines a first distance between the first and second contact locations along the first direction, and a second position, whereby the frame defines a second distance between the first and second contact locations along the first direction. The second distance is greater than the first distance, such that when in the second position, the at least one of the first and second arms is biased toward the first position. The first and second lengths are each greater than a length defined between an anterior end of the first vertebral body and a centroid of the first surface.

In accordance with another embodiment, an intervertebral implant frame includes a support member, a first flexible arm that extends from the support member, and a second flexible arm that extends from the support member. The support member defines an inner surface and at least two fixation element receiving apertures that are each configured to receive a respective bone fixation element to thereby attach the frame to first and second vertebral bodies. The first flexible arm defines a first inner spacer contacting surface. The second flexible arm defines a second inner spacer contacting surface that is spaced from the first inner spacer contacting surface. The inner surface of the support member and the first and second inner spacer contacting surfaces at least partially define a void configured to receive a spacer body that ingrows with the first and second vertebral bodies. The first and second flexible arms include respective first and second engagement members that are configured to receive respective first and second expansion forces from an expansion instrument prior to insertion of the spacer body into the void such that at least one of the first and second flexible arms elastically expands with respect to the other of the first and second arms in response to the expansion force.

In accordance with another embodiment, an intervertebral implant frame includes a support member, a first flexible arm that extends from the support member, and a second flexible arm that extends from the support member. The support member defines an inner surface, and at least two fixation element receiving apertures. Each of the fixation element receiving apertures is configured to receive a respective bone fixation element to thereby attach the intervertebral implant frame to first and second vertebral bodies, respectively when the intervertebral implant frame is disposed in an intervertebral space defined by first and second surfaces of the first and second vertebral bodies, respectively. The first flexible arm includes a first inner spacer contacting surface. The first arm has a first distal portion and a first proximal portion. The first distal portion and the first proximal portion each define a superior vertebral body contacting surface and an inferior vertebral body contacting surface. The second flexible arm includes a second inner spacer contacting surface spaced from the first inner spacer contacting surface along a first direction. The second arm has a second distal portion and a second proximal portion. The second distal portion and the second proximal portion each define a superior vertebral body contacting surface and an inferior vertebral body contacting surface. The first and second distal portions are configured to support the first and second vertebral bodies relative to each other on a posterior side of a plane that intersects a centroid of the first surface and the first and second posterior portions are configured to support the first and second vertebral bodies relative to each other on an anterior side of the plane that intersects the

3

centroid of the first surface, when the intervertebral implant frame is disposed in the intervertebral space.

In accordance with another embodiment, an intervertebral implant frame includes a support member, a first arm that extends from the support member, and a second arm that extends from the support member. The support member defines an inner surface and at least two fixation element receiving apertures that are each configured to receive a respective bone fixation element to thereby affix the frame to superior and inferior vertebral bodies. The first arm includes a first inner spacer contacting surface, and a first crimp member. The second arm includes a second inner spacer contacting surface spaced from the first inner spacer contacting surface along a first direction, and a second crimp member. The inner surface of the support member, and the first and second inner spacer contacting surfaces together define a void that is configured to receive a spacer body. The first crimp member is configured to be bent toward the second arm, and the second crimp member is configured to be bent toward the first arm to thereby engage the spacer body and retain the spacer body within the void.

In accordance with another embodiment, an intervertebral implant includes a support member, a first arm that extends from the support member, and a second arm that extends from the support member. The support member defines an inner surface, and at least two fixation element receiving apertures. Each of the fixation element receiving apertures is configured to receive a respective bone fixation element to thereby attach the frame to first and second vertebral bodies, respectively when the frame is disposed in an intervertebral space defined by the first and second vertebral bodies. The first arm includes a first inner spacer contacting surface. The second arm includes a second inner spacer contacting surface spaced from the first inner spacer contacting surface along a first direction. The inner surface of the support member and the first and second inner spacer contacting surfaces at least partially define a void that contains an allograft spacer. The first and second arms are elastically flexible from a first position to a second position, such that when the arms are in the second position, the void defines a cross-sectional dimension greater than that of the allograft spacer such that the void is sized to receive the allograft spacer body. When the first and second arms are in the first position, the first and second inner spacer contacting surfaces apply a retention force against the allograft spacer body along a direction toward the other of the first and second spacer contacting surfaces.

In accordance with another embodiment, an intervertebral implant system can include an intervertebral implant frame, and an expansion instrument. The intervertebral implant frame is configured to retain a spacer body. The frame has a support member that defines an inner surface, a first arm extending from the support member and defining a first inner spacer contacting surface, and a second arm extending from the support member and defining a second inner spacer contacting surface that is spaced from the first inner spacer contacting surface. The expansion instrument includes a first expansion arm that is configured to couple to the first arm, and a second expansion arm that is configured to couple to the second arm. The first and second arms are pivotally coupled to each other at a first pivot such that rotation of the first and second expansion arms about the first pivot causes the first and second arms to elastically flex away from each other when the first and second expansion arms are coupled to the first and second arms, respectively.

Also disclosed is a spacer body drill guide constructed in accordance with an embodiment. The drill guide includes a

4

clamp and a cradle. The clamp includes a first jaw and a second jaw that are translatable along a first direction with respect to each other. The first jaw defines a first outer surface, a first inner spacer contacting surface, and a pair of first drill guide apertures that extend from the first outer surface to the first inner spacer contacting surface along a direction that is transverse to the first direction. The second jaw defines a second outer surface, a second inner spacer contacting surface, and a pair of second drill guide apertures that extend from the second outer surface to the second inner spacer contacting surface along a direction that is transverse to the first direction. The cradle includes a base and a mounting portion that extends from the base along a second direction that is substantially perpendicular to the first direction. The mounting portion includes a body, a channel that extends into the body along the second direction, and a pair of third drill guide apertures that extend through the body and into the channel at a direction that is transverse to the second direction. The channel is configured to receive the first jaw such that the first drill guide apertures align with the third drill guide apertures when the clamp is mounted to the cradle.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing summary, as well as the following detailed description of embodiments of the application, will be better understood when read in conjunction with the appended drawings. For the purposes of illustrating the methods, implants and systems of the present application, there is shown in the drawings preferred embodiments. It should be understood, however, that the application is not limited to the precise methods, implants, and systems shown. In the drawings:

FIG. 1A is a perspective view of an intervertebral implant assembly that is implanted in an intervertebral space defined by a superior vertebral body and an inferior vertebral body, the intervertebral implant assembly including an intervertebral implant and at least a pair of fixation elements that attach the intervertebral implant to the superior vertebral body and the inferior vertebral body, respectively;

FIG. 1B is a side elevation view of the intervertebral implant assembly as shown in FIG. 1A, the intervertebral space defining an anterior-posterior midline;

FIG. 1C is a top plan view of the inferior vertebral body shown in FIG. 1B;

FIG. 2A is a perspective view of the intervertebral implant illustrated in FIGS. 1A and 1B, the intervertebral implant having an intervertebral implant frame and a spacer body retained by the intervertebral implant frame;

FIG. 2B is a top plan view of the intervertebral implant shown in FIG. 2A;

FIG. 3A is a perspective view of the intervertebral implant frame shown in FIG. 2, the intervertebral implant frame having a support member, a first arm extending from the support member, and a second arm extending from the support member, the first and second arms configured to elastically flex away from each other;

FIG. 3B is a front elevation view of the intervertebral implant frame shown in FIG. 3A;

FIG. 3C is a top plan view of the intervertebral implant frame shown in FIG. 3A;

FIG. 3D is a side elevation view of the intervertebral implant frame shown in FIG. 3A;

FIG. 3E is a cross-sectional view of the intervertebral implant frame shown in FIG. 3D through the line 3E-3E;

5

FIG. 4A is a perspective view of one of the fixation elements that is configured to affix the intervertebral implant shown in FIG. 2 to a vertebral body as illustrated in FIGS. 1A and 1B;

FIG. 4B is a side elevation view of the of the fixation element shown in FIG. 4A;

FIG. 5A is a perspective view of a spacer body made from bone graft;

FIG. 5B is a perspective view of the spacer body shown in FIG. 2;

FIG. 5C is a top plan view of the spacer body shown in FIG. 5B;

FIG. 5D is a side elevation view of the spacer body shown in FIG. 5B;

FIG. 6A is a perspective view of an intervertebral implant system constructed in accordance with an embodiment, the system including an actuation instrument configured as an expansion instrument that includes an actuation grip illustrated as an expansion grip that is configured to actuate the frame shown in FIG. 3A from a first configuration to a second configuration whereby the frame is configured to receive the spacer body shown in FIG. 5B;

FIG. 6B is a perspective view of the expansion instrument shown in FIG. 6A, the expansion instrument including a first expansion arm and a second expansion arm coupled to the first expansion arm at a first pivot, each expansion arm having a handle portion and a gripping portion that combine to define a handle of the expansion instrument and the expansion grip illustrated in FIG. 6A;

FIG. 6C is a top plan view of the expansion instrument shown in FIG. 6B;

FIG. 6D is a detailed view of one of the gripping portions of the expansion instrument shown in FIG. 6B;

FIG. 6E is an enlarged top plan view of the expansion grip shown in FIG. 6B, coupled to the first and second arms of the frame shown in FIG. 3A, showing the expansion instrument actuated from a first position to a second position, whereby the expansion grip applies an expansion force to the first and second arms of the frame when the expansion instrument is in the second position, the expansion force biasing the first and second arms of the frame to flex away from each other;

FIG. 7A is a perspective view of an intervertebral implant system constructed in accordance with another embodiment, the system including a intervertebral implant frame, and an actuation instrument configured as an expansion instrument that comprises a pair of clips that engage first and second arms of the frame along a direction that is similar to an insertion direction of the frame;

FIG. 7B is a top plan view of the intervertebral implant system shown in FIG. 7A;

FIG. 7C is an exploded view of the intervertebral implant system shown in FIG. 7A;

FIG. 8A is a perspective view of an intervertebral implant system constructed in accordance with another embodiment, the system including a intervertebral implant frame and an actuation instrument configured as an expansion instrument that comprises a pair of clips that engage first and second arms of the frame along a direction that is opposite to the insertion direction of the frame;

FIG. 8B is a top plan view of the system shown in FIG. 8A;

FIG. 8C is an exploded view of the system shown in FIG. 8A;

FIG. 9A is a perspective view of an intervertebral implant frame constructed in accordance with another embodiment, the frame including a first arm, a second arm, and a

6

respective expansion member that extends out from and is integral to a respective arm of the frame;

FIG. 9B is a perspective view of an intervertebral implant frame constructed in accordance with another embodiment, the frame including, a support member, a first arm, a second arm, and a respective expansion member that extends out from and is integral to each arm of the frame, the expansion members extending proximate to the support member;

FIG. 10A is a perspective view of an intervertebral implant frame constructed in accordance with another embodiment, the frame including first and second arms that each include a crimp member configured to be crimped against the spacer body to thereby retain the spacer body to the frame;

FIG. 10B is a top plan view of the frame shown in FIG. 10A;

FIG. 11A is a perspective view of an intervertebral implant frame constructed in accordance with another embodiment, the frame including first and second arms that each include a pair of crimp members configured to be crimped against the spacer body to thereby retain the spacer body to the frame;

FIG. 11B is a top plan view of the frame shown in FIG. 11A;

FIG. 12A is a perspective view of an intervertebral implant frame constructed in accordance with another embodiment, the frame including first and second arms that each include a crimp member configured as a crimp tab disposed within a window defined by the arm;

FIG. 12B is a top plan view of the frame shown in FIG. 12A;

FIG. 13A is a perspective view of an intervertebral implant frame constructed in accordance with another embodiment, the frame including first and second arms that each include at least one crimp member configured as a crimp tab;

FIG. 13B is a top plan view of the frame shown in FIG. 13A;

FIG. 14A is a perspective view of an actuation instrument configured as a crimping instrument constructed in accordance with an embodiment, the instrument including gripping members that are configured to crimp the crimp members of the frames shown in FIGS. 10A and 11A;

FIG. 14B is a detailed top plan view of the gripping members of the instrument shown in FIG. 14A, and an intervertebral implant disposed between the gripping members;

FIG. 14C is a top plan view of the gripping members illustrated in FIG. 14B, shown in a crimped position, whereby the crimp members are crimped onto a spacer body of the intervertebral implant so as to secure the arms to the intervertebral implant;

FIG. 14D is a detailed view of gripping members of a crimping instrument constructed in accordance with another embodiment, the gripping members including a beaked protrusion configured to crimp the crimp members of the frame shown in FIG. 12A;

FIG. 15A is a perspective view of an intervertebral implant frame constructed in accordance with another embodiment, the frame defining a four walled structure;

FIG. 15B is a top plan view of the frame shown in FIG. 15A;

FIG. 16A is a perspective view of a spacer body drill guide constructed in accordance with an embodiment, the drill guide including a clamp, and a cradle that is configured to mate with and support the clamp;

7

FIG. 16B is a perspective view of the clamp shown in FIG. 16A;

FIG. 16C is a perspective view of the clamp being mounted to the cradle;

FIG. 16D is a perspective view of the clamp after it has been mounted to the cradle;

FIG. 16E is a perspective view of a drill bit being inserted into drill guide apertures defined by the clamp to thereby form clearance channels in the spacer body; and

FIG. 16F is a perspective view of a spacer body after the clearance channels have been formed using the drill guide shown in FIG. 16A.

DETAILED DESCRIPTION

Referring to FIGS. 1A and 1B, a superior vertebral body 10a defines a first or superior vertebral surface 14a of an intervertebral space 18, and an adjacent second or inferior vertebral body 10b defines an inferior vertebral surface 14b of the intervertebral space 18. Thus, the intervertebral space 18 is disposed between or otherwise defined by the vertebral bodies 10a and 10b. The vertebral bodies 10a and 10b can be anatomically adjacent vertebral bodies, or can remain after a portion of bone has been removed. The intervertebral space 18 can be disposed anywhere along the spine as desired, including at the lumbar, thoracic, and cervical regions of the spine. As illustrated, the intervertebral space 18 is illustrated after a discectomy, whereby the disc material has been removed or at least partially removed to prepare the intervertebral space 18 to receive an intervertebral implant 22 that can achieve height restoration. As shown, the intervertebral implant 22 can be affixed to the superior and inferior vertebral bodies 10a and 10b with respective fixation elements 62. The intervertebral implant 22 and the fixation elements 62 together define an intervertebral implant assembly 24.

Certain terminology is used in the following description for convenience only and is not limiting. The words “right”, “left”, “lower” and “upper” designate directions in the drawings to which reference is made. The words “inner” or “distal” and “outer” or “proximal” refer to directions toward and away from, respectively, the geometric center of the implant and related parts thereof. The words, “anterior”, “posterior”, “superior”, “inferior”, “medial”, “lateral”, and related words and/or phrases are used to designate various positions and orientations in the human body to which reference is made and are not meant to be limiting. The terminology includes the above-listed words, derivatives thereof and words of similar import.

The intervertebral implant 22 is described herein as extending horizontally along a longitudinal direction “L” and lateral direction “A”, and vertically along a transverse direction “T”. Unless otherwise specified herein, the terms “lateral”, “longitudinal”, and “transverse” are used to describe the orthogonal directional components of various components. It should be appreciated that while the longitudinal and lateral directions are illustrated as extending along a horizontal plane, and that the transverse direction is illustrated as extending along a vertical plane, the planes that encompass the various directions may differ during use. For instance, when the intervertebral implant 22 is implanted into the intervertebral space 18 along an insertion direction I, the transverse direction T extends vertically generally along the superior-inferior (or caudal-cranial) direction, while the horizontal plane defined by the longitudinal direction L and lateral direction A lies generally in the anatomical plane defined by the anterior-posterior direction, and the

8

medial-lateral direction, respectively. Accordingly, the directional terms “vertical” and “horizontal” are used to describe the intervertebral implant 22 and its components as illustrated merely for the purposes of clarity and illustration.

As shown in FIGS. 1B and 1C, the vertebral surfaces 14a and 14b of the vertebral bodies 10a and 10b can define a geometrical centroid M that is generally located at an anterior-posterior midpoint between an anterior end and a posterior end of the surfaces 14a and 14b. As shown in FIG. 1B, the intervertebral implant 22 is configured to be disposed or otherwise implanted in the intervertebral space 18 such that a portion of the intervertebral implant 22 is located on a posterior side of a medial lateral plane that intersects the centroid M, and a portion of the intervertebral implant 22 is located on an anterior side of the medial lateral plane that intersects the centroid M. Such a configuration can ensure that the height restoration of the intervertebral space 18 remains relatively unchanged over time.

In reference to FIGS. 1A, 1B, 2A and 2B, the intervertebral implant 22 includes an intervertebral implant frame 26 and a spacer body 30 that is retained by the frame 26. The intervertebral implant 22, defines a proximal end P and a distal end D. The frame 26 may be made from any biocompatible material, such as TAN alloy, or PEEK. The spacer body 30 may be composed of a synthetic material such as PEEK or a graft substitute such as tricalcium phosphate or hydroxyapatite. The spacer body 30 may also be composed of a bone graft such as allograft bone, autograft bone or xenograft bone. By using a spacer body 30 composed of bone graft, surface area for fusion can be maximized. Additionally, incorporation of a bone graft spacer body 30 promotes bony on-growth and increased probability and speed of sound fusion. The frame 26 is configured to be attached to various bone graft spacer body footprint geometries, which may or may not conform to the internal footprint of the frame 26.

As shown in FIGS. 3A-3E the frame 26 includes a support member 34, a first arm 38 that extends from the support member 34, and a second arm 42 that extends from the support member 34. In the illustrated embodiment, the first and second arms 38 and 42 are flexible arms that extend from opposed ends of the support member 34 such that the support member 34, the first arm 38, and the second arm 42 together create a three wall structure that retains and secures the spacer body 30 to the frame 26.

As shown in FIGS. 3A-3C, the support member 34 includes a body 46 that defines an inner surface 50, an outer surface 54, and at least one, such as two or such as four, fixation element receiving apertures 58 that extend through the body 46 from the outer surface 54 to the inner surface 50. Each fixation element receiving aperture 58 is configured to receive a respective fixation element, such as fixation element 62 shown in FIGS. 4A and 4B. While the fixation elements 62 are illustrated as screws, it should be appreciated that the fixation elements 62 may also be nails or any other fixation element configured to attach the intervertebral implant 22 to the first and second vertebral bodies 10a and 10b. As shown, the support member 34 can further include at least one, such as three tabs 64 that extend transversely from the body 46. The tabs 64 may sit on an anterior side of the vertebral bodies and prevent over-insertion of the frame 26 into the intervertebral space 18. In the illustrated embodiment, the support member 34 includes two superior tabs 64 and one inferior tab 64 that are each configured to sit flush or slightly proud of an anterior surface of the vertebral bodies depending on the patient's spinal anatomy and/or site preparation. It should be appreciated, however, that the

support member 34 can include other configurations for the tabs 64. For example, the support member 34 can include a single superior tab 64 and two inferior tabs 64.

As shown in FIG. 3B, two of the fixation element receiving apertures 58 are inner apertures 66 that extend through the body 46 at a downward angle relative to the insertion direction I, and two of the fixation element receiving apertures 58 are outer apertures 70 that extend through the body 46 at an upward angle relative to the insertion direction I. The inner apertures 66 are configured to receive respective fixation elements, such as fixation element 62 shown in FIGS. 4A and 4B, to thereby attach the intervertebral implant 22 to the inferior vertebral body 10b. Similarly, the outer apertures 70 are configured to receive respective fixation elements 62 to thereby attach the intervertebral implant 22 to the superior vertebral body 10a. It should be appreciated, however, that the inner apertures 66 can extend through the body 46 at an upwards angle and the outer apertures 70 can extend through the body 46 at a downwards angle, as desired. Moreover, it should be appreciated that the support member 34 can define any number of fixation element receiving apertures 58 as desired.

As shown in FIG. 3B, the apertures 58 each define internal threads 78. The internal threads 78 are configured to engage external threads 80 defined by a head 82 of the respective fixation element 62 that is received within the apertures 58. It should be appreciated, however, that the apertures 58 can be void of threads as desired. The orientation of the apertures 58 may be configured such that the fixation elements that are received by the apertures 58 may have an insertion variance of ± 5 degrees and do not allow toggling or settling. Once fully received, the fixation elements may lock to the frame 26 to thereby increase the surgeon's reassurance of good screw trajectories and can act as a safety by preventing possibilities of over-insertion during implantation.

As shown in FIG. 3C, support member 34 can include a retention member 73 that extends from the inner surface 50. The retention member 73 is configured to help retain the spacer body 30 when the spacer body is being supported by the frame 26. The retention member 73 is illustrated as a spike though it should be appreciated, that the retention member 73 can have other configurations. For example, the retention member 73 can be configured as a blade.

As shown in FIGS. 2A, and 3A-3E, the first arm 38 and the second arm 42 each extend from the support member 34 and define a first distal terminal end 83 and a second distal terminal end 84, respectively. The first and second arms 38 and 42 each define gripping portions and support portions. The gripping portions are configured to retain the spacer body 30 while the support portions are configured to support the vertebral bodies 10a and 10b relative to each other. The gripping portions and the support portions can be a single structure or the support portions can be separate structures that extend from the gripping portions. The arms 38 and 42 can be radiolucent so as to increase fluoroscopy visibility. The first arm 38 includes a first inner spacer contacting surface 88 and the second arm 42 includes a second inner spacer contacting surface 92 that is spaced from the first inner spacer contacting surface 88 along a first direction, such as the lateral direction A. The inner surface of the support member 34, the first inner spacer contacting surface 88, and the second inner spacer contacting surface 92 together define a void 94 that is configured to receive and grip the spacer body 30. The terminal ends 83 and 84 are spaced apart from the support member along a second direction, such as the longitudinal direction L that is substantially perpendicular to the first direction so as to define

first and second lengths L_1 and L_2 , respectively of the first and second arms 38 and 42. The first and second arms 38 and 42 are sized such that the first and second lengths L_1 and L_2 are each greater than a length L_3 defined between an anterior end E of the inferior vertebral body 10b and the centroid M of the surface 14b of the inferior vertebral body 10b, as shown in FIG. 1C. It should be appreciated, that the first and second arms 38 and 42 can also be sized such that the first and second lengths L_1 and L_2 are greater than a length defined between an anterior end of the superior vertebral body 10a and a centroid of the surface 14a of the superior vertebral body 10a. The first and second lengths L_1 and L_2 may be between about 3.5 mm and about 12 mm, between about 6.0 mm and about 10 mm, and preferably about 9.5 mm. In some embodiments, the support member 34, the first arm 38, and the second arm 42 extend around at least 51% of the spacer body 30, and preferably around at least 80% of the spacer body 30.

The flexible arms 38 and 42 can have a transverse height and a lateral width that at least partially define a cross-sectional area of the arms 38 and 42. The arms 38 and 42 can have a cross-sectional area that may vary so long as the arms 38 and 42 are capable of elastically deforming or flexing to thereby allow the frame 26 to receive the spacer body and subsequently apply a retention force to the spacer body 30 after the frame 26 has received the spacer body 30. In that regard, the arms 38 and 42 are configured to elastically flex laterally outwardly away from each other, or otherwise elastically deform from a first position to a second flexed position to allow the frame 26 to receive the spacer body 30. It should be appreciated that the first position can be a relaxed position of the arms 38 and 42 or a flexed position of the arms 38 and 42 that is outwardly flexed with respect to a relaxed position. At least respective portions of the arms 38 and 42, such as contact locations 320 and 324 (see FIG. 6E), are further spaced from each other in the second position than when in the first position. Once the spacer body 30 is disposed between the arms 38 and 42, the arms 38 and 42 may flex inwardly toward each other to a third or engaged position whereby the arms 38 and 42 engage the spacer body 30 so as to secure the frame 26 to the spacer body 30 as shown in FIG. 2. It should be appreciated that the third position can be outwardly flexed with respect to the first position, and can be substantially equal to the first position. Thus, the respective portions of the arms 38 and 42 can be further spaced from each other when in the third position with respect to the first position, or the respective portions of the arms 38 and 42 can be spaced from each other when in the third position a distance substantially equal to the distance that the respective portions of the arms 38 and 42 are spaced when in the first position. Thus, it can be said that when the arms 38 and 42 are in the third position, at least respective portions of the arms 38 and 42 are spaced apart a distance equal to or greater than (or no less than) the distance that the arms 38 and 42 are spaced when in the first position. It will be further appreciated from the description below in accordance with certain embodiments (see, for instance FIG. 14C) that at least respective portions of the arms 38 and 42 can be spaced apart a distance when in the engaged position that is less than the distance that the respective portions of the arms 38 and 42 are spaced apart when in the first position.

As shown in FIG. 3C, the first and second arms 38 and 42 extend from the support member 34 such that the first and second arms 38 and 42 are angled toward each other so as to push the spacer body 30 toward the other of the first and second arms 38 and 42 and toward the support member 34.

11

For example, the inner surface of the support member 34 and the first inner spacer contacting surface 88 form an angle ϕ_1 that is less than 90 degrees, and the inner surface 50 of the support member 34 and the second inner spacer contacting surface 92 form an angle ϕ_2 that is less than 90 degrees. In the illustrated embodiment, ϕ_1 and ϕ_2 are each about 88 degrees, though it should be appreciated that ϕ_1 and ϕ_2 may be any angle as desired, and may be different angles with respect to each other.

As shown in FIGS. 3C and 3D, each arm 38 and 42 includes a substantially straight portion 100 that extends from the support member 34, and a distal bent or angled portion 104 that extends from a distal end of the straight portion 100 toward the other of the bent portions 104 such that the bent portions 104 are configured to contact a distal surface of the spacer body 30. As shown, the bent portions 104 at least partially wrap around the spacer body 30 to thereby prevent the spacer body 30 from separating from the frame 26 after the spacer body 30 has been retained by the frame 26. As shown in FIG. 3A, each arm 38 and 42 can include at least one, such as a plurality of retention members 116 that extend out from the first and second inner spacer contacting surfaces 88 and 92. In the illustrated embodiment, the retention members 116 define teeth that extend out of the bent portions 104 so as to form a column of teeth on each bent portion 104. The retention members 116 are configured to engage the spacer body 30 when the frame 22 is retaining the spacer body 30 to thereby ensure that the spacer body 30 remains retained by the frame 22. It should be appreciated, however, that the retention member 116 can have any configuration as desired, so long as the retention member 116 is capable of engaging the spacer body 30. For example, the retention members 116 can be spikes that extend from the inner surfaces 88 and 92 at an angle, elongate blades, or even punches that can be punched into the spacer body 30 by an individual after the spacer body 30 is disposed in the frame 26.

As shown in FIG. 3D, the arms 38 and 42 may be configured to assist in bearing compressive loads by the vertebral bodies 10a and 10b to thereby mitigate subsidence and settling. As shown, each arm 38 and 42 defines a respective distal portion 110 and a respective proximal portion 114. The distal portions 110 are spaced apart from the proximal portions 114 along the longitudinal direction L such that when the frame 26 is disposed in the intervertebral space 18, the distal portions 110 are on the posterior side of the centroid M of the surface 14b of the inferior vertebral body 10b, and the proximal portions 114 are on the anterior side of the centroid M of the surface 14b of the inferior vertebral body 10b. Each distal portion 110 defines a superior vertebral body contacting surface 118 and an inferior vertebral body contacting surface 122. Similarly, each proximal portion 114 defines a superior vertebral body contacting surface 126 and an inferior vertebral body contacting surface 130. Because of the length of the arms 38 and 42 and because of the transverse height of the arms 38 and 42 at their distal and proximal portions, the frame 26 can bear compressive loads from the vertebral bodies if the spacer body 30 were to subside.

As shown in FIG. 3D, the arms 38 and 42 may be configured to conform to the lordotic curve of the spine and in particular of the intervertebral space 18 in which the frame 26 is to be disposed. For example, a line drawn between the superior vertebral body contacting surfaces 118 and 126 of the first arm 38 forms an angle that is between about -0 degrees and about -5 degrees with respect to the insertion direction I, and a line drawn between the inferior

12

vertebral body contacting surfaces 122 and 130 of the first arm forms a line that is between about 0 degrees and about 5 degrees with respect to the insertion direction I. Similarly, a line drawn between the superior vertebral body contacting surfaces 118 and 126 of the second arm 42 forms an angle that is between about 0 degrees and about -5 degrees with respect to the insertion direction, and a line drawn between the inferior vertebral body contacting surfaces 122 and 130 of the second arm 42 forms an angle that is between about 0 degrees and about 5 degrees with respect to the insertion direction I. It should be appreciated, however, that the lines drawn between the superior vertebral body contacting surfaces 118 and 126, and between the inferior vertebral body contacting surfaces 122 and 130 can be any angle as desired. For example, the lines may be parallel to each other. Therefore, it can be said that a first plane is defined by the superior vertebral body contacting surfaces, and a second plane is defined by the inferior vertebral body contacting surfaces. The first plane and the second plane can be parallel to each other or converge toward each other.

As shown in FIG. 3D, each arm 38 and 42 further includes a superior cut-out 140 and an inferior cut-out 144 to thereby provide visual access to the superior vertebral body 10a and to the inferior vertebral body 10b respectively when the frame 26 is disposed in the intervertebral space 18. The cut-outs 140 and 144 are each disposed between the proximal portions 114 and distal portions 110 of the first and second arms 38 and 42. As shown, the superior cut-outs 140 extend laterally through an upper portion of the arms 38 and 42 so as to define upper curved recesses 148 in the straight portions 100 of the arms 38 and 42. Similarly, the inferior cut-outs 144 extend laterally through a lower portion of the arms 38 and 42 so as to define lower curved recesses 152 in the arms 38 and 42. It should be appreciated that the superior and inferior cut-outs 140 and 144 can have other configurations as desired. For example, the cut-outs 140 and 144 can define rectangular channels that extend through the arms 38 and 42.

As shown in FIGS. 3D and 3E, each arm 38 and 42 can further include a window 156 that extends laterally through the straight portions 100 of the arms 38 and 42 between the superior and inferior cut-outs 140 and 144. The windows 156 are configured to provide visual access to the spacer body 30 through the first and second arms 38 and 42 when the frame 26 is retaining the spacer body 30. As shown, the windows 156 are oval shaped and elongate along the longitudinal direction L. It should be appreciated, however, that the windows 156 can have any shape as desired. For example, the windows 156 can also be rectangular shaped.

As shown in FIGS. 3A, 3D, and 3E, each arm 38 and 42 includes an engagement member 170 that is configured to receive a first and a second external expansion force, respectively, from an expansion instrument prior to insertion of the spacer body 30 into the void 94 such that at least one of the first and second arms 38 and 42 elastically expands or elastically flexes with respect to the other of the first and second arms 38 and 42 in response to the expansion forces. As shown in FIG. 3A, the engagement members 170 each define a dove-tailed slot 174 that defines an opening 178 at its distal end such that the expansion instrument can engage the dove-tailed slot 174 in a direction that is opposite to the insertion direction I of the frame 26. As shown in FIG. 3D, the dove-tailed slots 174 are wider at the openings 178 and taper as they extend proximally. The wider openings 178 provide a guide for the expansion instrument to engage the engagement members 170. As shown in FIG. 3A, the dove-tailed slots 174 each include a pair of opposed recesses

13

182 that define angled engagement surfaces 186. It should be appreciated, however, that the engagement members 170 can have any configuration as desired so long as they can receive respective expansion forces.

Now referring to FIG. 5A, the spacer body 30 that is received within the frame 26 is preferably made from a bone graft material such as allograft bone, autograft bone, or xenograft bone, for example. As shown in FIG. 5A, the spacer body 30 can include cancellous bone 190 that is at least partially surrounded by cortical bone 194. It should be appreciated, however, that the spacer body 30 can be made from only cancellous bone 190 or from only cortical bone 194.

As shown in FIGS. 5B-5D, the spacer body can alternatively be made from a synthetic material. Referring to FIGS. 5B-5D, the spacer body 30 is sized and dimensioned to fit within the frame 26. Though not required, the spacer body may have a lateral width of between about 10 mm and about 16 mm, a longitudinal length of between about 10 mm and about 17 mm, and a transverse height that is between about 5 mm and about 12 mm. The outer footprint of the spacer body 30 can vary and the frame 26 may still be able to retain the spacer body 30. That is, the frame 26 or at least the arms 38 and 42 are configured to retain a first spacer body 30 having a first maximum width, a first outer footprint, or a first cross-sectional dimension, and a second spacer body having a second maximum width, a second outer footprint, or a second cross-sectional dimension that is different than those of the first spacer body 30. Therefore, the frame 26 and in particular the arms 38 and 42 can retain spacer bodies 30 that are made from bone shaped by the surgeon and not just spacer bodies 30 that are machined to have specific dimensions prior to insertion into the frame 26.

As shown in FIGS. 5B-5D, the spacer body 30 can define a superior or upper or outer bone engaging surface 200 and an opposed inferior or lower or outer bone engaging surface 204. The surfaces 200 and 204 are configured to engage the superior and inferior surfaces 14a and 14b, respectively of the vertebral bodies 10a and 10b. The spacer body 30 can further define side surfaces 208 that are configured to be engaged by the first and second inner spacer contacting surfaces of the first and second arms 38 and 42 to thereby retain the spacer body 30 within the frame 26.

As shown in FIGS. 6A-6E, the spacer body 30 can be coupled to the frame 26 using an actuation instrument 210 that is configured as an expansion instrument. The instrument 210, the frame 26, and in some cases the spacer body 30 can together define an intervertebral implant system 214. The expansion instrument 210 includes a grip 212 and a handle 213. The grip 212 is configured as an expansion grip and is configured to apply the first and second expansion forces to the engagement members 170 of the first and second arms 38 and 42. The first and second expansion forces will elastically expand the first and second arms 38 and 42 of the frame 26 to thereby allow the spacer body 30 to be received by the void 94 of the frame 26.

As shown, the instrument 210 includes a first arm 220 that is configured to releasably couple to the first arm 38 of the frame 26, and a second arm 224 that is rotatably coupled to the first arm 220 at a first pivot 228 and is configured to releasably couple to the second arm 42 of the frame 26. The first and second arms 220 and 224 are configured as expansions arms. The first and second expansion arms 220 and 224 are pivotally coupled to each other at the first pivot 228 such that rotation of the first and second expansion arms 220 and 224 about the first pivot 228 causes the first and second arms 38 and 42 of the frame 26 to elastically flex away from each

14

other when the instrument 210 is coupled to the frame 26. Therefore, the instrument 210 is configured to have a first position or configuration whereby the instrument 210 can be coupled to the frame 26, and a second position or configuration whereby the instrument 210 is applying expansion forces to the arms 38 and 42 of the frame 26 so that the frame can receive the spacer body 30.

As shown in FIGS. 6B and 6C, each expansion arm 220 and 224 includes a handle portion 232 that extends proximally from the first pivot 228 and a gripping portion 236 that extends distally from the first pivot 228. The handle portions 232 define the handle 213, and the gripping portions 236 define the grip 212. The handle portions 232 are configured to be gripped by an individual such that the handle portions 232 can be squeezed or otherwise moved toward each other. The expansion instrument 210 can further include a handle locking mechanism 240 that is configured to lock the handle portions 232 relative to each other after the handle portions 232 have been moved toward each other. In the illustrated embodiment, the locking mechanism 240 includes a threaded shaft 244 and a nut 248. As at least one of the handle portions 232 is moved along the shaft 244, the nut 248 can be threaded along the shaft 244 to thereby lock the handle portions 232 relative to each other. It should be appreciated, however, that the locking mechanism 240 can include other configurations, as desired. For example, the locking mechanism 240 can have a ratchet configuration.

As shown in FIGS. 6C and 6D, the gripping portions 236 are configured to expand the frame arms as the handle portions 232 are moved toward each other. Each gripping portion 236 includes an extension member 250 that extends distally from the first pivot 228, and a gripping member 254 that is pivotally coupled to a distal end of the extension member 250 at a second pivot 258. Each gripping member 254 includes an engagement member 262 that is configured to engage respective engagement members 170 of the first and second arms 38 and 42 of the frame 26. As shown in FIG. 6D, the engagement members 262 are dove-tailed members 266 that are opposed to each other and are configured to mate with the dove-tailed slots of the first and second arms 38 and 42 to thereby couple the expansion instrument 210 to the frame 26. As shown, each dove-tailed member 266 includes a pair of transversely opposed protrusions 280 that each define an angled engagement surface 284 that is configured to abut or otherwise contact a respective angled engagement surface 186 of the slots 174 when the engagement members 262 are mated with the engagement members 170. It should be appreciated that the engagement members 262 can have other configurations as desired. For example, the engagement members 262 and the engagement members 170 can be reversed.

As shown in FIG. 6D, a proximal end of each engagement member 262 defines a tapered lead-in portion 270 that allows the engagement members 262 to easily be guided into the openings 178 of the engagement members 170. Therefore, the expansion instrument 210 can easily be coupled to the frame 26 along a direction that is opposite the insertion direction I. That is, if the frame 26 is stationary, the expansion instrument 210 can be coupled to the frame 26 by translating the instrument 210 along a direction that is opposite the insertion direction I.

As shown in FIG. 6C, each gripping member 254 includes a pair of stops 300 that extend proximally toward the extension member 250 and are spaced apart from the extension member 250. As the gripping member 254 rotates about the second pivot 258 the stops 300 will limit the rotation by contacting the extension member 250. Therefore, the angu-

15

lar range in which the gripping members 254 can rotate about the second pivots 258 will depend on the distance in which the stops 300 are spaced apart from the extension members 250.

As shown in FIG. 6C, each gripping portion 236 further includes a biasing member 304 that is configured to bias the gripping members 254 toward each other. In the illustrated embodiment, the biasing members 304 are leaf springs 308 that are coupled to the extension members 250 and urge against an outer surface of the gripping members 304. By biasing the gripping members 254 toward each other, the expansion instrument 210 can more easily and more predictably be coupled to the frame 26. It should be appreciated, however, that the biasing members 304 can have other configurations as desired.

In operation and in reference to FIG. 6E, the expansion instrument 210 is coupled to the frame 26 by placing the engagement members 262 of the instrument 210 distal to the engagement members 170 of the frame 26. By translating or otherwise moving the frame 26 or the instrument 210 toward the other, the engagement members 262 will engage the engagement members 170 to thereby couple the frame 26 to the instrument 210 such that the second pivots 258 of the instrument 210 abut an outer surface of the flexible arms 38 and 42 proximate to the support member 34. By squeezing the handle portions 232 toward each other, the extension member 250 of the first expansion arm 220 will rotate counterclockwise about the first pivot 228 and the gripping member 254 of the first expansion arm 220 will rotate clockwise about the second pivot 258. Conversely, the extension member 250 of the second expansion arm 224 will rotate clockwise about the first pivot 228 and the gripping member 254 of the second expansion arm 224 will rotate counterclockwise about the second pivot 258.

This rotation will cause at least one of the first and second arms 38 and 42 to elastically flex away from the other. For example, the first and second inner spacer contacting surfaces 88 and 92 of the first and second arms 38 and 42 can define respective first and second respective contact locations 320 and 324, and at least one of the first and second arms 38 and 42 is flexible so as to be movable between a first position, whereby the frame 26 defines a first distance d_1 that extends along the lateral direction A between the first and second contact locations 320 and 324, and a second position, whereby the frame 26 defines a second distance d_2 that extends along the lateral direction A between the first and second contact locations 320 and 324. It should be appreciated that the first and second contact locations 320 and 324 can be located anywhere along the arms 320 and 324 so long as they remain the same when the first and second distances are measured.

As shown in FIG. 6E, the second distance d_2 is greater than the first distance d_1 such that when in the second position, the void 94 defines a cross-sectional dimension that is greater than that of the spacer body 30 such that the void 94 is sized to receive the spacer body 30. While the arms 38 and 42 are elastically flexed, at least one of the arms 38 and 42 is biased toward the first position. Therefore, when the handle portions 232 of the instrument 210 are released, the arms 38 and 42 will flex back to a third position, and when in the third position, the frame 26 defines a third distance d_3 that extends along the lateral direction A between the first and second contact locations 320 and 324 and is less than the second distance d_2 (See FIG. 2B). When in the third position at least one of the first and second inner contacting surfaces 88 and 92 of the arms 38 and 42 will apply a retention force

16

against the spacer body 30 along a direction toward the other of the first and second inner spacer contacting surfaces 88 and 92.

In another embodiment and in reference to FIGS. 7A-7C, an intervertebral implant system 350 can include an intervertebral implant frame 426, and an actuation instrument 428 that is also configured as an expansion instrument. The frame 426 includes a support member 434, a first arm 438 that extends from the support member 434, and a second arm 442 that extends from the support member 434. The first and second arms 438 and 442 are flexible arms and are configured to elastically flex away from each other so that the frame 426 can receive a spacer body 30. The support member 434, the first arm 438, and the second arm 442 are similar to the support member 34, the first arm 38, and the second arm 42 shown in FIG. 3A, and include like structure unless otherwise described.

As shown in FIG. 7C, each of the first and second arms 438 and 442 includes a straight portion 446 and a bent portion 450 that extends from a distal end of the straight portion 446 at angle toward the other of the bent portions 450. Each arm 438 and 442 further includes an engagement member 454 that defines a slot 458 that extends through the respective arm 438 and 442. As shown the slots 458 extend through the straight portions 446 at substantially the same angle in which the bent portions 450 extend from the distal end of the straight portions 446. Moreover, the slots 458 extend through the straight portions 446 and into a cavity 460 defined by the bent portions 450. Each bent portion 450 further includes a retention bump 461. The bumps 461 are configured to provide a tactile feedback indicating that the expansion instrument 428 is coupled to the arms 438 and 442.

As shown in FIGS. 7A-7C, the expansion instrument 428 can include a pair of removable clips 470 that are configured to engage the slots 458 defined by the arms 438 and 442 by translating the clips 470 distally or along a direction that has a directional component that is the same as the insertion direction I. As shown, each clip 470 can be a substantially straight elongate member 474 having an engagement member 476 that is defined by a pair of elongate cantilevered beams 478 at its distal end that are separated by a recess 482. An outer beam 478 can include a recess 479 that is configured to receive the retention bump 461 and provide an indication that the clips 470 are properly coupled to the arms 438 and 442. As shown in FIG. 7B, each clip 470 can be attached to a respective arm 438 and 442 by inserting one of the cantilevered beams 478 of a respective clip 470 into a slot 458 of the respective arms 438 and 442. The cantilevered beam 478 that is inserted into the slot 458 will be received by the cavity 460 defined by the bent portion 450.

Once coupled to the arms 438 and 442, the clips 470 extend out from the arms 438 and 442 at an angle such that the clips 470 diverge from each other as they extend proximally. By squeezing a proximal portion of the clips 470 toward each other, the cantilevered beams 478 apply an expansion force to the engagement members 454 or at least to the bent portions 450 such that the arms 438 and 442 elastically flex away from each other. While flexed, the frame 426 can receive the spacer body 30. By releasing the clips 470, the arms 438 and 442 will apply a retention force to the spacer body 30 to thereby retain the spacer body 30 in the frame 426.

In another embodiment and in reference to FIGS. 8A-8C, an intervertebral implant system 522 can include an intervertebral implant frame 526, and an actuation instrument 528 that is configured as an expansion instrument. The frame 526

17

includes a support member 534, a first arm 538 that extends from the support member 534, and a second arm 542 that extends from the support member 534. The first and second arms 538 and 542 flexible arms and are configured to elastically flex away from each other so that the frame 526 can receive a spacer body 30. The support member 534, the first arm 538, and the second arm 542 are similar to the support member 34, the first arm 38, and the second arm 42 shown in FIG. 3A, and include like structure unless otherwise described.

As shown in FIG. 8C, each of the first and second arms 538 and 542 includes a straight portion 546 and a bent portion 550 that extends from a distal end of the straight portion 546 at angle toward the other of the bent portions 550. Each arm 538 and 542 further includes an engagement member 554 that defines a slot 558 that extends through the respective arm 538 and 542. As shown the slots 558 extend through the bent portions 550 along a direction that is opposite the insertion direction I. Moreover, the slots 558 extend into a cavity 560 that is defined by each straight portion 546. Each straight portion 546 further includes a retention bump 561. The bumps 561 are configured to provide a tactile feedback indicating that the expansion instrument 528 is coupled to the arms 538 and 542.

As shown in FIGS. 8A-8C, the expansion instrument 528 can include a pair of removable clips 570 that are configured to engage the slots 558 defined by the arms 538 and 542 by translating the clips 570 proximally or along a direction that is opposite to the insertion direction I. As shown, each clip 570 includes a handle portion 574 and a gripping portion 578 that extends distally from the handle portion 574. Each gripping portion 578 includes a body 582 and an engagement member 584 that extends out from the body 582. As shown, each engagement member 584 defines a proximally extending protrusion 586 that is spaced from the 582 such that a recess 588 is defined between the protrusion 586 and body 582. Each gripping portion 578 further includes a shoulder 590 that extends out from the body 582 and is configured to abut the arms 538 and 542 proximate to the support member 526 when the clip 570 is coupled to the frame 526. Each clip 570 further includes a recess 579 that is configured to receive the retention bump 561 and provide an indication that the clips 570 are properly coupled to the arms 538 and 542. As shown in FIG. 8B, each clip 570 can be attached to a respective arm 538 and 542 by inserting the protrusion 586 of a respective clip 470 into a slot 558 of a respective arm 538 and 542. The protrusion 586 will be received by the cavity 560 defined by the straight portion 546.

Once coupled to the arms 538 and 542, the clips 570 extend out from the arms 538 and 542 such that the handle portions 574 are proximal to the front of the frame 526 and the shoulders 590 are abutting the arms 538 and 542 proximate to the support member 526 as shown in FIG. 8B. By squeezing the handle portions 574 toward each other, clips 570 rotate about the shoulders 590 and the protrusions 586 apply an expansion force to the engagement members 554 or to at least the straight portions 546 such that the arms 538 and 542 elastically flex away from each other. While flexed, the frame 526 can receive the spacer body 30. By releasing the clips 570, the arms 538 and 542 will apply a retention force to the spacer body 30 to thereby retain the spacer body 30 in the frame 526.

It should be appreciated that the engagement members of the frames 26, 426, and 526, and the engagement members of the instruments 210, 428, and 528 are interchangeable. Therefore, for example, frame 26 and instrument 210 can

18

include any of the engagement members 170, 262, 454, 476, 554, and 584 so long as the engagement members of the frame 26 can mate with the engagement members of the instrument 210 to thereby releasably couple the frame 26 to the instrument 210.

As shown in FIGS. 9A and 9B, the actuation instrument can be incorporated into the frame such that the actuation instrument and the frame are a unitary part. In accordance with another embodiment and in reference to FIG. 9A, an intervertebral implant frame 626 can include a support member 634, a first arm 638 that extends from the support member 634, and a second arm 642 that extends from the support member 634. The first and second arms 638 and 642 are flexible arms and are configured to elastically flex away from each other so that the frame 626 can receive a spacer body 30. The support member 634, the first arm 638, and the second arm 642 are similar to the support member 34, the first arm 38, and the second arm 42 shown in FIG. 3A, and include like structure unless otherwise described.

As shown in FIG. 9A, each of the first and second arms 638 and 642 includes a straight portion 646 and a bent portion 650 that extends from a distal end of the straight portion 646 at angle toward the other of the bent portions 650. Each arm 638 and 642 further includes an expansion member 654 that extends out from the arm at angle. As shown, each expansion member 654 extends out from the proximal end of the bent portion 650 and includes a handle portion 660 that is spaced apart from the straight portion 646. By squeezing the handle portions 660 toward each other, the arms 638 and 642 will elastically flex away from each other so that the frame 626 can receive the spacer body 30. As shown in FIG. 9B, the expansion members 654 can extend proximally such that handle portions 660 are proximal to the arms 638 and 642 to thereby provide more lavage. Once the frame 626 has been coupled to the spacer body 30, the expansion members 654 can be broken off and removed from the frame 626.

In another embodiment the frame can be configured to have portions of the frame arms crimped toward the spacer body to thereby retain the spacer body. In such embodiments, the frame is capable of receiving the spacer body without flexing the arms of the frame away from each other. The spacer body will then be retained by the frame by crimping the arms toward the spacer body to thereby provide a retention force to the spacer body.

For example, in reference to FIGS. 10A and 10B, an intervertebral implant frame 726 includes a support member 734, a first arm 738 that extends from the support member 734, and a second arm 742 that extends from the support member 734. The first and second arms 734 and 738 are crimpable arms such that the frame 726 is configured to have a first initial position in which the spacer body 30 can be disposed between the arms 738 and 742, and a second crimped or engaged position in which the arms 738 and 742 are crimped toward each other to thereby apply a retention force to the spacer body 30. The support member 734, the first arm 738, and the second arm 742 are similar to the support member 34, the first arm 38, and the second arm 42 shown in FIG. 3A, and include like structure unless otherwise described.

The first and second arms 738 and 742 are configured to be crimped rather than flexed. As shown, the arms 738 and 742 include first and second inner spacer contacting surfaces 744 and 746, respectively that are configured to contact and retain the spacer body 30. That is, the inner surface of the support member 734, the first inner spacer contacting surface 744 and the second inner spacer contacting surface 746

together define a void **748** that is configured to receive the spacer body **30**. Each arm **738** and **742** further includes a substantially straight portion **750** and a crimp member **752** that extends distally from the straight portion **748**. As shown, the crimp members **752** are each coupled to the straight portions **750** by a hinge **756**. In the illustrated embodiment, the hinges **756** define transverse bending grooves **758** formed in the inner spacer contacting surfaces **744** and **746**.

In operation, the frame **726** can receive the spacer body **30** within the void **748** without expanding the arms **738** and **742** away from each other. Though it should be appreciated some expanding may occur. Once the spacer body **30** is properly positioned, the first crimp member **752** of the first arm **738** can be rotated about the first hinge **756** such that the first crimp member **752** is bent toward the second arm **742**. Similarly, the second crimp member **752** of the second arm **742** can be rotated about the second hinge **756** such that the second crimp member **752** is bent toward the first arm **738**. After the crimp members **752** have been crimped or otherwise bent, the arms **738** and **742** apply a retention force to the spacer body **30** to thereby retain the spacer body **30** to the frame **726**. As shown, each arm **738** and **742** can further include a retention member **760** that extends from the first and second inner spacer contacting surfaces **744** and **746**, respectively. The retention members **760** are configured to engage the spacer body **30** to thereby prevent migration of the spacer body **30** from the frame **726**.

In another embodiment and in reference to FIGS. **11A** and **11B**, an intervertebral implant frame **826** can include more than two crimp members. As shown, the frame **826** includes a support member **834**, a first arm **838** that extends from the support member **834**, and a second arm **842** that extends from the support member **834**. The first and second arms **838** and **842** are crimpable arms such that the frame **826** is configured to have a first initial position in which the spacer body **30** can be disposed between the arms **838** and **842**, and a second crimped or engaged position in which the arms **838** and **842** are crimped toward each other to thereby apply a retention force to the spacer body **30**. The support member **834**, the first arm **838**, and the second arm **842** are similar to the support member **34**, the first arm **38**, and the second arm **42** shown in FIG. **3A**, and include like structure unless otherwise described.

The first and second arms **838** and **842** are configured to be crimped rather than flexed. As shown, the arms **838** and **842** include first and second inner spacer contacting surfaces **844** and **846**, respectively that are configured to contact and retain the spacer body **30**. That is, the inner surface of the support member **834**, the first inner spacer contacting surface **844** and the second inner spacer contacting surface **846** together define a void **848** that is configured to receive the spacer body **30**. Each arm **838** and **842** further includes a first crimp member **850** and a second crimp member **852** that extends distally from the first crimp member **850**. In other words, the first arm **838** can include a first crimp member **850** and a third crimp member **852** of the frame **826**, and the second arm **842** can include a second crimp member **850** and a fourth crimp member **852** of the frame **826**. As shown, the first crimp member **850** and the second crimp member **850** are each coupled to the support member **834** by first and second hinges **856** respectively. Similarly, the third and fourth crimp members **852** are coupled to the first crimp members **850** by third and fourth hinges **860** respectively. In the illustrated embodiment, the hinges **856** and **860** define transverse bending grooves **864** formed in the outer surfaces of the first and second arms **838** and **842**.

In operation, the frame **826** can receive the spacer body **30** within the void **848** without expanding the arms **838** and **842** away from each other. Though it should be appreciated some expanding may occur. Once the spacer body **30** is properly positioned, the first crimp member **850** and the second crimp member **852** of the first arm **838** can be rotated about the first and second hinges **856** and **860** respectively such that the crimp members **850** and **852** are bent toward the second arm **842**. Similarly, the first crimp member **850** and the second crimp member **852** of the second arm **842** can be rotated about the first and second hinges **856** and **860** respectively such that the crimp members **850** and **852** are bent toward the first arm **838**. After the crimp members **850** and **852** have been bent, the arms **838** and **842** apply a retention force to the spacer body **30** to thereby retain the spacer body **30** to the frame **826**. As shown, each arm **838** and **842** can further include a retention member **868** that extends from the first and second inner spacer contacting surfaces **844** and **846**, respectively. The retention members **868** are configured to engage the spacer body **30** to thereby prevent migration of the spacer body **30** from the frame **826**.

In another embodiment and in reference to FIGS. **12A** and **12B**, an intervertebral implant frame **926** can include crimp members that define crimping tabs. As shown, the frame **926** includes a support member **934**, a first arm **938** that extends from the support member **934**, and a second arm **942** that extends from the support member **934**. The first and second arms **938** and **942** are crimpable arms such that the frame **926** is configured to have a first initial position in which the spacer body **30** can be disposed between the arms **938** and **942**, and a second crimped or engaged position in which the arms **938** and **942** are crimped toward each other to thereby apply a retention force to the spacer body **30**. The support member **934**, the first arm **938**, and the second arm **942** are similar to the support member **34**, the first arm **38**, and the second arm **42** shown in FIG. **3A**, and include like structure unless otherwise described.

The first and second arms **938** and **942** are configured to be crimped rather than flexed. As shown, the arms **938** and **942** include first and second inner spacer contacting surfaces **944** and **946**, respectively that are configured to contact and retain the spacer body **30**. That is, the inner surface of the support member **934**, the first inner spacer contacting surface **944** and the second inner spacer contacting surface **946** together define a void **948** that is configured to receive the spacer body **30**. Each arm **938** and **942** further includes a substantially straight portion **950**, a bent portion **951** extending from a distal end of the straight portion **950**, and a crimp member **952** that is formed in the straight and bent portion **950** and **951**. As shown, the crimp members **952** each define a crimping tab **956** that is attached to one of the straight portion **950** or the bent portion **951** by a hinge **958**. In the illustrated embodiment, a proximal edge of the crimping tab **956** is coupled to the straight portion **950** and defines the hinge **958**. It should be appreciated, however, that an upper edge, a lower edge, or a distal edge of the crimping tabs **956** could define the hinges **958**. As shown, each crimping tab **956** is disposed within a window defined by the respective arm.

In operation, the frame **926** can receive the spacer body **30** within the void **948** without expanding the arms **938** and **942** away from each other. Though it should be appreciated some expanding may occur. Once the spacer body **30** is properly positioned, the crimping tab **956** of the first arm **938** can be rotated about the hinge **958** such that the crimping tab **956** is bent toward the second arm **942**. Similarly, the crimping tab **956** of the second arm **942** can be rotated about the hinge

21

958 such that the crimping tab 956 is bent toward the first arm 938. After the crimping tabs 956 have been bent, the frame is in the crimped or engaged position such that the arms 938 and 942 apply a retention force to the spacer body 30 to thereby retain the spacer body 30 to the frame 926. It should be appreciated that the first and second arms 938 and 942 can include any number of crimping tabs 956 as desired.

In another embodiment and in reference to FIGS. 13A and 13B, an intervertebral implant frame 1026 can include crimp members that define tabs disposed along upper and lower edges of the arms. As shown, the frame 1026 includes a support member 1034, a first arm 1038 that extends from the support member 1034, and a second arm 1042 that extends from the support member 1034. The first and second arms 1034 and 1038 are crimpable arms such that the frame 1026 is configured to have a first initial position in which the spacer body 30 can be disposed between the arms 1038 and 1042, and a second crimped or engaged position in which the arms 1038 and 1042 are crimped toward each other to thereby apply a retention force to the spacer body 30. The support member 1034, the first arm 1038, and the second arm 1042 are similar to the support member 34, the first arm 38, and the second arm 42 shown in FIG. 3A, and include like structure unless otherwise described.

The first and second arms 1038 and 1042 are configured to be crimped rather than flexed. As shown, the arms 1038 and 1042 include first and second inner spacer contacting surfaces 1044 and 1046, respectively that are configured to contact and retain the spacer body 30. That is, the inner surface of the support member 1034, the first inner spacer contacting surface 1044 and the second inner spacer contacting surface 1046 together define a void 1048 that is configured to receive the spacer body 30. Each arm 1038 and 1042 further includes a substantially straight portion 1050, a bent portion 1051 extending from a distal end of the straight portion 1050, and at least one, such as a plurality of crimp members 1052 that are formed in upper and lower edges of the arms 1038 and 1042. As shown, the crimp members 1052 each define a crimping tab 1056 that are each attached to the straight and bent portions 1050 and 1051 by respective horizontal hinges 1058.

In operation, the frame 1026 can receive the spacer body 30 within the void 1048 without expanding the arms 1038 and 1042 away from each other. Though it should be appreciated some expanding may occur. Once the spacer body 30 is properly positioned, the crimping tabs 1056 of the first arm 1038 can be rotated about the hinges 1058 such that the crimping tabs 1056 are bent toward the second arm 1042. Similarly, the crimping tabs 1056 of the second arm 1042 can be rotated about the hinges 1058 such that the crimping tabs 1056 are bent toward the first arm 1038. After the crimping tabs 1056 have been bent, the frame 1026 is in the crimped or engaged position such that the arms 1038 and 1042 apply a retention force to the spacer body 30 to thereby retain the spacer body 30 to the frame 1026. It should be appreciated that the first and second arms 1038 and 1042 can include any number of crimping tabs 1056 as desired.

As shown in FIGS. 14A-14C, the spacer body 30 can be coupled to the frame 726 using an actuation instrument 1110 that is configured as a crimping instrument. The instrument 1110 and the frame 726 can together define an intervertebral implant system 1114. The crimping instrument 1110 includes an actuation grip 1116 that is configured as a crimping grip so as to apply a crimping force to the frame 726. For instance, in accordance with the illustrated embodiment, the crimping grip 1116 is configured to apply first and second crimping forces to the crimp members 752 of the first

22

and second arms 738 and 742. The first and second crimping forces will permanently deform the crimp members 752 of the frame 726 to thereby retain the spacer body 30 to the frame 726. Therefore, the instrument 1110 is configured to have a first position or configuration whereby the instrument receives the frame 726, and a second position or configuration whereby the instrument applies a crimping force to the frame 726. It should be appreciated that the instrument 1110 can also be used to crimp the frame 726 to the spacer body.

As shown in FIGS. 14A and 14B, the instrument 1110 includes a first arm 1118 and a second arm 1122 rotatably coupled to the first arm 1118 at a first pivot 1126. The first and second arms 1118 and 1122 are configured as crimping arms and each includes a handle portion 1130 that extends proximally of the first pivot 1126 and a gripping portion 1134 that extends distally of the first pivot 1126. The handle portions 1130 are configured to be gripped by an individual and moved toward each other to thereby crimp the frame 726 to the spacer body 30.

As shown in FIGS. 14A and 14B, the gripping portions 1134 are coupled to the handle portions 1130 at respective second pivots 1138 that are distal to the first pivot 1126. As shown in FIG. 14B, each gripping portion 1134 includes an extension member 1142 that extends from the second pivot 1138, and a gripping member 1146 that extends distally from a distal end of the extension member 1142. As shown, the gripping portions 1134 are coupled to each other at a third pivot 1150 that proximate to the distal ends of the extension members 1142, such that the gripping members 1146 extend distally to the third pivot 1150. Therefore, when the handle portions 1130 are moved toward each other so as to rotate about the first pivot 1126, the extension members 1142 will rotate about their respective second pivots 1138 such that they move away from each other, and the gripping members 1146 will rotate about the third pivot 1150 such that they move toward each other to thereby crimp the frame 726 on to the spacer body 30.

As shown in FIG. 14B, each gripping member 1146 defines a ribbed contact surface 1156 that is configured to contact and apply a crimping force to the crimp members 752 of the frame 726. As shown, the contact surfaces 1156 are spaced apart from each other so as to define a void 1160 that is configured to receive the frame 726 and spacer body 30. Each gripping member 1146 may further define a lower platform that is configured to support the frame 726 and spacer body 30 while the instrument 1110 is crimping the frame 726 to the spacer body 30. The ribs of the contact surfaces 1156 are configured to allow a portion of the frame 726 between the gripping members 1146.

In operation and in reference to FIG. 14C, the void 1160 defined between the contact surfaces 1156 receives the frame 726 and spacer body 30 such that the spacer body 30 is loosely disposed within the frame 726. By squeezing the handle portions 1130 toward each other, the contact surfaces 1156 will apply respective crimping forces to the crimp members 752 of the frame 726. Once a sufficient amount of force has been applied, the crimp members 752 will permanently deform toward each other such that the frame 726 will move to the crimped or engaged position and will provide a retention force against the spacer body 30 and retain the spacer body 30 to the frame 726. As shown, when in the crimped or engaged position, respective portions of the arms 738 and 742 are spaced apart from each other by the second distance d_2 which is less than the first distance.

In another embodiment and in reference to FIG. 14D, the instrument 1110 can also be configured to bend the crimp

23

members 952 of the frame 926. As shown, the instrument 1110 can include beaked protrusions 1170 that are defined by the gripping members 1146 and are configured to engage the crimp members 952 when the handle portions 1130 are squeezed together. The beaked protrusions 1170 can be anywhere along the gripping members 1146 so long as they align with the crimp members 952. Moreover, the gripping members 1146 can define any number of beaked protrusions 1170, as desired. Therefore, if the frame 926 includes four crimping tabs 956 (i.e. crimp members 952) then the gripping members 1146 can each define two beaked protrusions 1170 that align with the crimping tabs 956.

In another embodiment and in reference to FIGS. 15A and 15B frame may include a fully enclosed endplate that supports the spacer body with a multi-walled, such as a six walled structure. As shown, an intervertebral implant frame 1226 includes a support member 1234, a first arm 1238 that extends from the support member 1234, a second arm 1242 that extends from the support member 1234, and an end plate 1244 that connects the distal ends of the first and second arms 1238 and 1242 together. The support member 1234, the first arm 1238, the second arm 1242, and the end plate 1244 together define a six wall structure that supports the spacer body 30.

Now in reference to FIGS. 16A-16E, the spacer body 30 can be pre-drilled to make channels in the spacer body 30 using a spacer body drill guide 1300. The channels are configured to provide clearance for the fixation elements 62 when the intervertebral implant is affixed to the superior and inferior vertebral bodies. Therefore, when the fixation elements are inserted into the fixation element apertures of the frame and then subsequently affixed to the vertebral bodies, the fixation elements will not be interfered with by the spacer body 30. The channels can be made either before or after the spacer body has been retained by the frame. If the channels are made prior to the spacer body being retained by the frame, then the channels can have a dimension that is greater than a dimension of the fixation element receiving apertures of the frame.

As shown in FIGS. 16A and 16B, the spacer body drill guide 1300 includes a clamp 1304 configured to hold the spacer body 30, and a cradle 1308 that is configured to support the clamp 1304 while the channels are drilled using a drill bit 1312. The clamp 1304 includes a first clamp arm assembly 1316 and a second clamp arm assembly 1320 that is rotatably coupled to the first clamp arm assembly 1316 at a first pivot 1324. The first clamp arm assembly 1316 includes a first handle 1328, a first extension member 1332, and a first jaw 1344 removeably coupled to the first extension member 1332. Similarly, the second clamp arm assembly 1320 includes a second handle 1352, a second extension member 1356, and a second jaw 1358 removeably coupled to the second extension member 1356. As shown, a proximal end of the first extension member 1332 is coupled to a middle portion of the first handle 1328 at a respective second pivot 1336, and a middle portion of the first extension member 1332 is coupled to a distal end of the second handle 1352 at the third pivot 1340. Similarly, a proximal end of the second extension member 1356 is coupled to a middle portion of the second handle 1352 at a respective second pivot 1336, and a middle portion of the second extension member 1356 is coupled to a distal end of the first handle 1328 at a respective third pivot 1340.

The first and second extension members 1332 and 1356 are substantially parallel to each other and remain substantially parallel to each other as the first and second handles 1328 and 1352 are rotated about the first pivot 1324. This

24

allows the first and second jaws 1344 and 1358 to translate rather than rotate relative to each other as the first and second handles 1328 and 1352 are rotated about the first pivot 1324. As shown in FIGS. 16A and 16B, each extension member 1332 and 1356 includes an elongate mounting portion 1370 at its distal end. Each mounting portion 1370 defines a fixation element receiving aperture 1364 that is configured to receive a respective fixation element 1374. As shown, the first and second jaws 1344 and 1358 are configured to be mounted to the removeably mounting portions 1370 with the fixation elements 1374.

As shown in FIGS. 16A and 16B, the first jaw 1344 includes an elongate body 1380 that has a proximal mounting portion 1384 and a distal gripping portion 1388. The mounting portion 1384 defines an elongate channel 1392 that is configured to receive the mounting portion 1370 of the first extension member 1332. The mounting portion 1384 further defines an outer slot or aperture 1396 that extends into the channel 1392 and is configured to receive the fixation element 1374 to thereby couple the first jaw 1344 to the first extension member 1332. The mounting portion 1384 further includes an engagement rail 1397 that is configured to engage the cradle 1308 when the clamp 1304 is mounted to the cradle 1308.

As shown in FIGS. 16A and 16B, the gripping portion 1388 includes an inner spacer contacting surface 1402, an outer surface 1406 and at least one such as two, guide holes 1410 that extend from the outer surface 1406 through to the inner spacer contacting surface 1402 at a downward angle. The guide holes 1410 are configured to receive the drill bit 1312 and guide the drill bit 1312 to the spacer body 30. As shown, a lower portion of the inner spacer contacting surface 1402 defines a pair of cut outs 1412 that provide clearance for the drill bit 1312 as it extends through the holes 1410.

As shown in FIG. 16B, the gripping portion 1388 can further include a mating member 1414, such as a bore 1418 that extends into the gripping portion 1388. The bore 1418 is configured to receive a mating member of the cradle 1308 to thereby properly align the clamp within the cradle. It should be appreciated that the mating member 1414 can have other configurations as desired. For example, the mating member 1414 can define a peg or protrusion.

As shown in FIGS. 16A and 16B, the second jaw 1358 includes an elongate body 1430 that has a proximal mounting portion 1434 and a distal gripping portion 1438. The mounting portion 1434 defines an elongate channel 1442 that is configured to receive the mounting portion 1370 of the first extension member 1332. The mounting portion 1434 further defines an outer slot or aperture 1446 that extends into the channel 1442 and is configured to receive the fixation element 1374 to thereby couple the second jaw 1358 to the second extension member 1356.

As shown in FIGS. 6A and 6B, the gripping portion 1438 includes an inner spacer contacting surface 1452, an outer surface 1456 and at least one such as two, guide holes 1460 that extend from the outer surface 1456 through to the inner spacer contacting surface 1452 at a downward angle. The guide holes 1460 are configured to receive the drill bit 1312 and guide the drill bit 1312 to the spacer body 30. As shown, a lower portion of the inner spacer contacting surface 1402 defines a pair of cut outs 1462 that provide clearance for the drill bit 1312 as it extends through the holes 1460.

As shown in FIG. 16B, each gripping portion 1388 and 1438 can further include a plurality of retention members 1470 that extend out from the inner spacer contacting surfaces 1402 and 1452. In the illustrated embodiment the retention members 1470 define spikes that are configured to

25

engage the spacer body 30. It should be appreciated, however, that the retention members 1470 can include other configuration, or the gripping portions 1388 and 1438 can be void of retention members 1470.

As shown in FIG. 16A, the cradle 1308 includes a base 1480 and a mounting portion 1484 that extends up from the base 1480. The base 1480 is sized and configured to sit on a surface and support the clamp 1304 while the drill bit 1312 drills the channels into the spacer body 30. The mounting portion 1484 includes a transverse elongate body 1488 and a channel 1492 that extends transversely into the body 1488. The channel 1492 is configured to receive the first jaw 1344 along a transverse direction such that when the first jaw 1344 is received by the channel 1492 the first jaw 1344 is fully supported by the cradle 1308.

The mounting portion 1484 further includes a pair of drill guide apertures 1500 that extend through body 1488 and into the channel 1492. The drill guide apertures 1500 of the mounting portion 1484 are configured to align with the drill guide apertures 1410 of the first jaw 1344 when the first jaw 1344 is received by the channel 1492. The mounting portion 1484 further includes a first platform 1504 that a distal end of the channel 1492 terminates into, and a mating member 1508 that is defined by the first platform 1504. In the illustrated embodiment, the mating member 1508 is a peg 1512 that is configured to mate with the bore 1418 of the first jaw 1344. It should be appreciated, however, that the mating member 1508 can have other configurations as desired so long as the mating members of the mounting portion 1484 and the first jaw 1344 can mate with each other.

As shown in FIG. 16A, the cradle 1308 further includes a second platform 1516 that extends from the base 1480 and is spaced apart from the first platform 1504. The second platform 1516 defines a pair of cutouts 1520 that align with the drill guide apertures 1460 of the second jaw 1358 when the second jaw 1358 is resting on the second platform 1516.

In operation and in reference to FIGS. 16C-16F, the clamp 1304 is configured to hold a spacer body 30 by moving the handle portions 1328 and 1352 toward each other. The clamp 1304 is then translated toward the cradle 1308 subsequently along the transverse direction T such that the first jaw 1344 of the clamp 1304 is mounted within the channel 1492 of the cradle 1408. When mounted and as shown in FIG. 16D, the peg 1512 engages the bore 1418, and the first and second jaws 1344 and 1358 rest on the first and second platforms 1504 and 1516 respectively, such that the drill guide apertures 1410 of the first jaw 1344 are aligned with the drill guide apertures 1500 of the cradle 1308.

As shown in FIG. 16E, the drill bit 1312 may then be inserted into the drill guide apertures 1410 and 1460 to thereby form the channels in the spacer body 30. As shown in FIG. 16F, the spacer body 30 will have two upper channels 1600, and two lower channels 1614. After the channels have been formed, the spacer body 30 may be coupled to a frame such as one of the frames described, using any of the instruments described. When the spacer body 30 is retained by the frame the fixation element receiving apertures of the frame will align with the channels 1600 and 1614 of the spacer body 30. The channels 1600 and 1614 can have a dimension have a dimension such as a diameter d_4 that is greater than the diameter of the fixation element receiving apertures of the frame. It should be appreciated, however, that the diameter d_5 can be equal to or even less than the diameter of the fixation element receiving apertures of the frame, as desired.

It should be appreciated, that the drill guide 1300 can be part of a kit that also includes at least one of an intervertebral

26

implant frame, an actuation instrument, and a drill bit. Moreover it should be appreciated, that the kit can also include the spacer body 30 and at least one fixation element 62.

It will be appreciated by those skilled in the art that changes could be made to the embodiments described above without departing from the broad inventive concept thereof. Furthermore, it should be appreciated that the structure, features, and methods as described above with respect to any of the embodiments described herein can be incorporated into any of the other embodiments described herein unless otherwise indicated. For example, the frame 26 can also include crimp members as shown in FIGS. 10A, 11A, 12A, and 13A. It is understood, therefore, that this invention is not limited to the particular embodiments disclosed, but it is intended to cover modifications within the spirit and scope of the present disclosure.

What is claimed:

1. An intervertebral implant frame comprising:

a support member that defines at least two fixation element receiving apertures, each of the fixation element receiving apertures configured to receive a respective bone fixation element to thereby attach the intervertebral implant frame to first and second vertebral bodies, respectively when the intervertebral implant frame is disposed in an intervertebral space defined by first and second surfaces of the first and second vertebral bodies, respectively;

a first arm that extends from the support member and includes a first inner surface, and a first outer surface opposite the first inner surface; and

a second arm that extends from the support member and includes a second inner surface spaced from the first inner surface along a first direction, the second arm including a second outer surface opposite the second inner surface, the second arm defining a first width, a second width greater than the first width, and a third width greater than the second width, each of the first, second, and third widths measured from the second inner surface to the second outer surface along the first direction, the first width measured at a first location, the second width measured at a second location farther from the support member than the first location is from the support member, and the third width measured at a third location farther from the support member than the second location is from the support member;

wherein the first and second inner surfaces define a gap configured to receive a spacer body, the first arm comprises a first column of teeth that extends from the first inner surface, the second arm comprises a second column of teeth that extends from the second inner surface, such that the first and second columns of teeth are configured to engage the spacer body when the spacer body is received in the gap, and

wherein the first inner surface includes a first inner surface portion, the second inner surface includes a second inner surface portion, each of the first and second inner surface portions is angled toward the other of the first and second inner surface portions as they extend in a direction away from the support member, the first inner surface portion extends to the first column of teeth, and the second inner surface portion extends to the second column of teeth.

2. The intervertebral implant frame of claim 1, wherein the first and second arms are capable of retaining a spacer body consisting of cancellous bone.

27

3. The intervertebral implant frame of claim 1, wherein the frame defines an upper surface configured to face the first vertebral body, and a lower surface configured to face the second vertebral body.

4. The intervertebral implant frame of claim 3, wherein the third location is in the second portion.

5. The intervertebral implant frame of claim 1, wherein the first and second arms each define a respective distal portion and a respective proximal portion, the distal portions each define a superior vertebral body contacting surface and an inferior vertebral body contacting surface, the proximal portions each define a superior vertebral body contacting surface and an inferior vertebral body contacting surface.

6. The intervertebral implant frame of claim 1, wherein the first and second arms each include an expansion instrument engagement member.

7. The intervertebral implant frame of claim 6, wherein the expansion instrument engagement members each define a dove-tailed slot.

8. The intervertebral implant frame of claim 7, wherein the dove-tailed slots are each open at their distal ends, such that an expansion instrument can engage the dove-tailed slots in a direction that is opposite to an insertion direction of the intervertebral implant frame.

9. The intervertebral implant frame of claim 7, wherein each of the first and second arms is configured to flex away from the other of the first and second arms so as to receive the spacer body in the gap.

10. The intervertebral implant frame of claim 6, wherein the expansion instrument engagement members each define a slot that extends through the first and second arms.

11. The intervertebral implant frame of claim 1, wherein the arms are configured to retain a first spacer body having a first maximum width and a second spacer body having a second maximum width that is different than the first maximum width.

12. The intervertebral implant frame of claim 1, wherein the third width is measured through the second column of teeth.

13. The intervertebral implant frame of claim 1, wherein the first arm defines a fourth width, a fifth width greater than the fourth width, and a sixth width greater than the fifth width, each of the fourth, fifth, and sixth widths measured from the first outer surface to the first inner surface along the

28

first direction, the first width measured at a fourth location, the fifth width measured at a fifth location farther from the support member than the fourth location is from the support member, and the sixth width measured at a sixth location farther from the support member than the fifth location is from the support member.

14. The intervertebral implant frame of claim 13, wherein the first width is equal to the fourth width, the second width is equal to the fifth width, and the third width is equal to the sixth width.

15. The intervertebral implant frame of claim 1, wherein the support member includes an inner surface that defines the gap, the support member includes a retention member that extends from the inner surface toward the gap, and the retention member is configured to retain a spacer body when the spacer body is coupled to the intervertebral implant frame.

16. The intervertebral implant frame of claim 1, coupled to a spacer body received in the gap.

17. The intervertebral implant frame of claim 1, wherein the at least two fixation element receiving apertures includes a first aperture, a second aperture, a third aperture, and a fourth aperture, and each of the at least two fixation element receiving apertures defines a respective entry opening in an outer surface of the support member.

18. The intervertebral implant frame of claim 17, wherein the first aperture, the second aperture, the third aperture, and the fourth aperture are aligned such that a plane that is parallel to the first direction and perpendicular to the outer surface intersects each of the first aperture, the second aperture, the third aperture, and the fourth aperture.

19. The intervertebral implant as recited in claim 1, wherein the first outer surface includes a first outer surface portion opposite the first inner surface portion, the second outer surface includes a second outer surface portion opposite the second inner surface portion, and each of the first and second outer surface portions is angled toward the other of the first and second outer surface portions as they extend in a direction away from the support member.

20. The intervertebral implant of claim 19, wherein the first outer surface portion is parallel to the first inner surface portion, and the second outer surface portion is parallel to the second inner surface portion.

* * * * *